

OUTDOOR LIGHTING



 Zambelis
LIGHTS

INDEX



01. PORTABLE | p.008-019

02. FLOOR & WALL | p.020-077

03. WALL | p.078-129

04. SPIKES | p.130-163

05. STEP | p.164-185

06. CEILING | p.186-199

07. INGROUND | p.200-213

08. WALL WASHER | p.214-221



OUTDOOR LIGHTING

OUTDOOR LIGHTING




OUTDOOR LIGHTING





OUTDOOR LIGHTING




PORTABLE | p.008-019

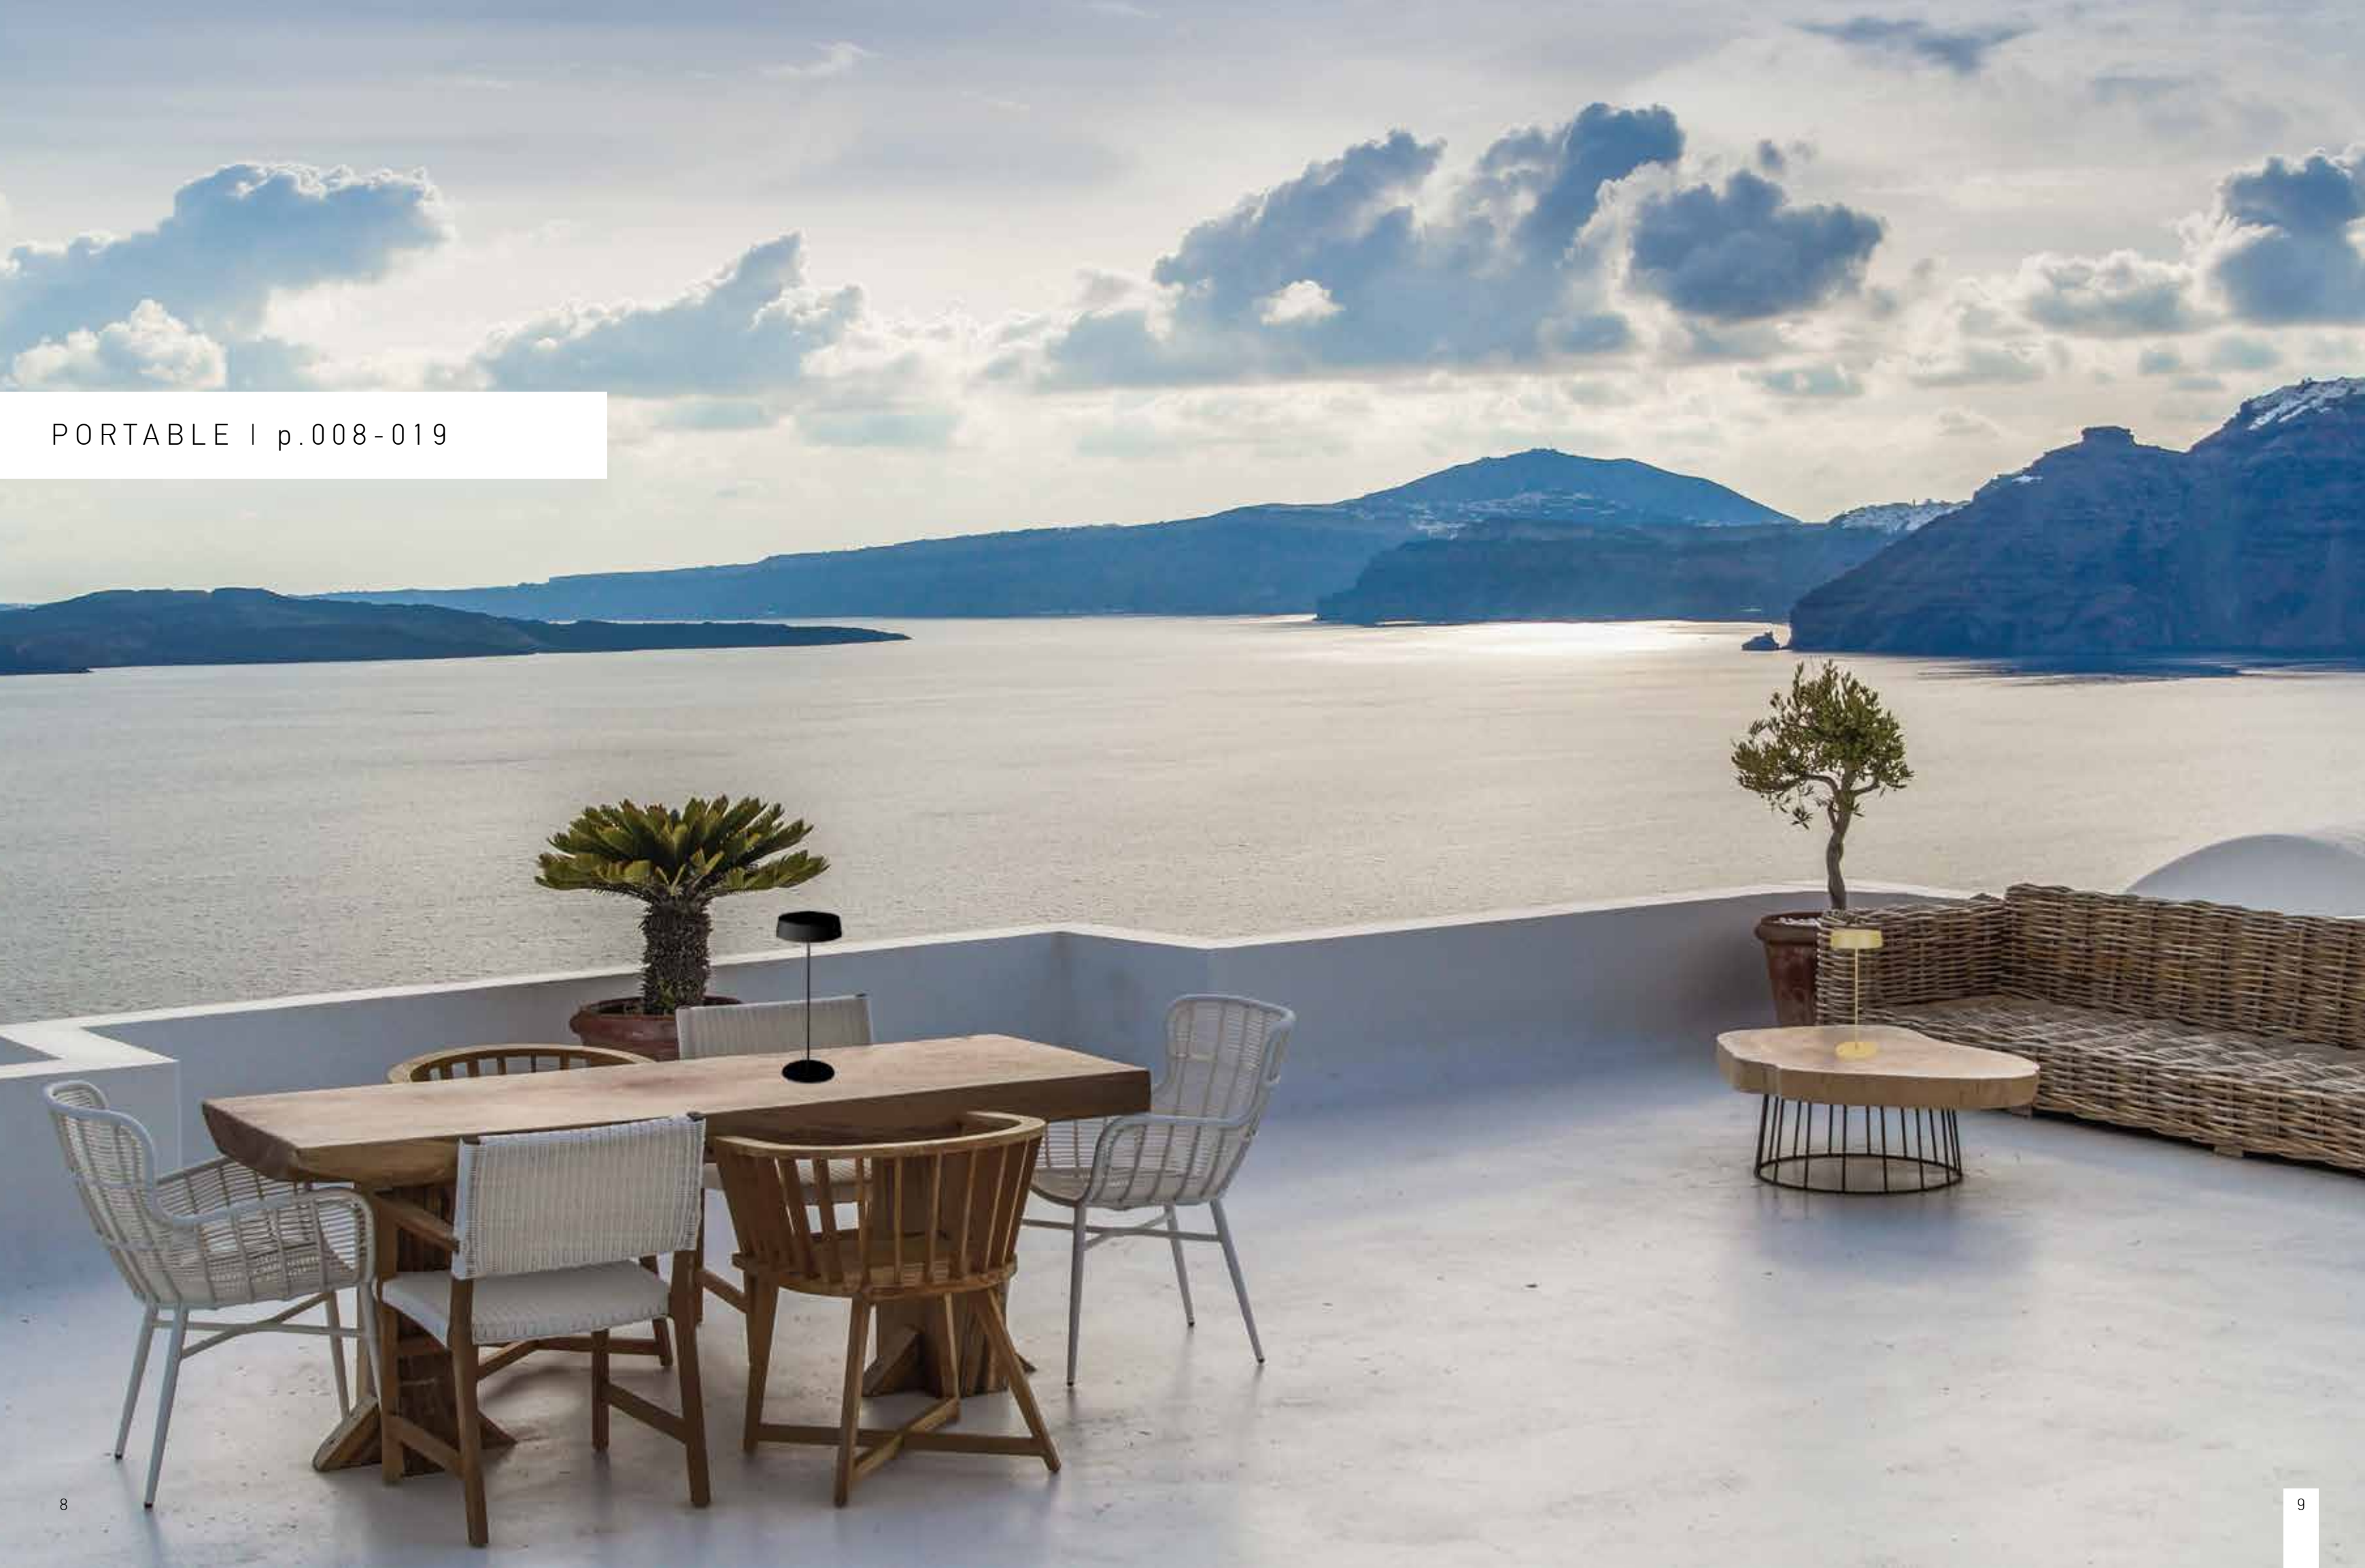

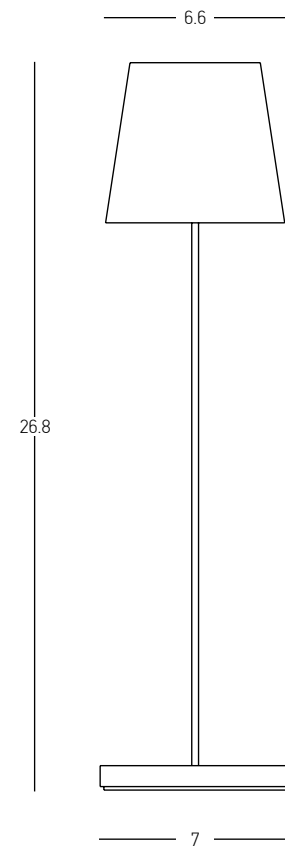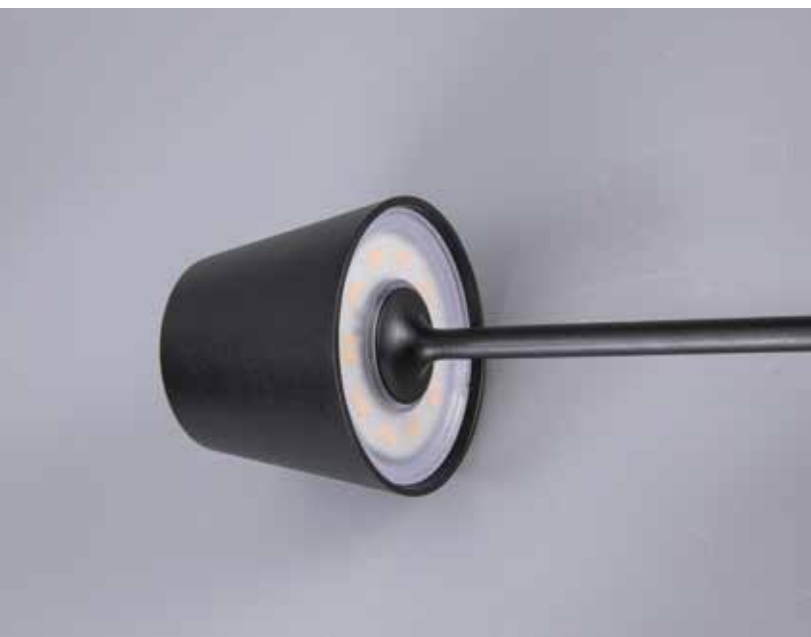

Power 1.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 125Lm
 Cri 80
 IP 54
 Dimensions Ø: 6.6cm H: 26.8cm
 3 Steps Dimming 10%, 50%, 100%
 Material Aluminium - PC Diffuser
 Special Feature Shade Ø: 6.6cm H: 5.9cm
 Portable Table Lamp
 Charging Base with USB Cable Included


Color Black / **Code E369**
 Color Brick / **Code E370**
 Color Sand / **Code E371**

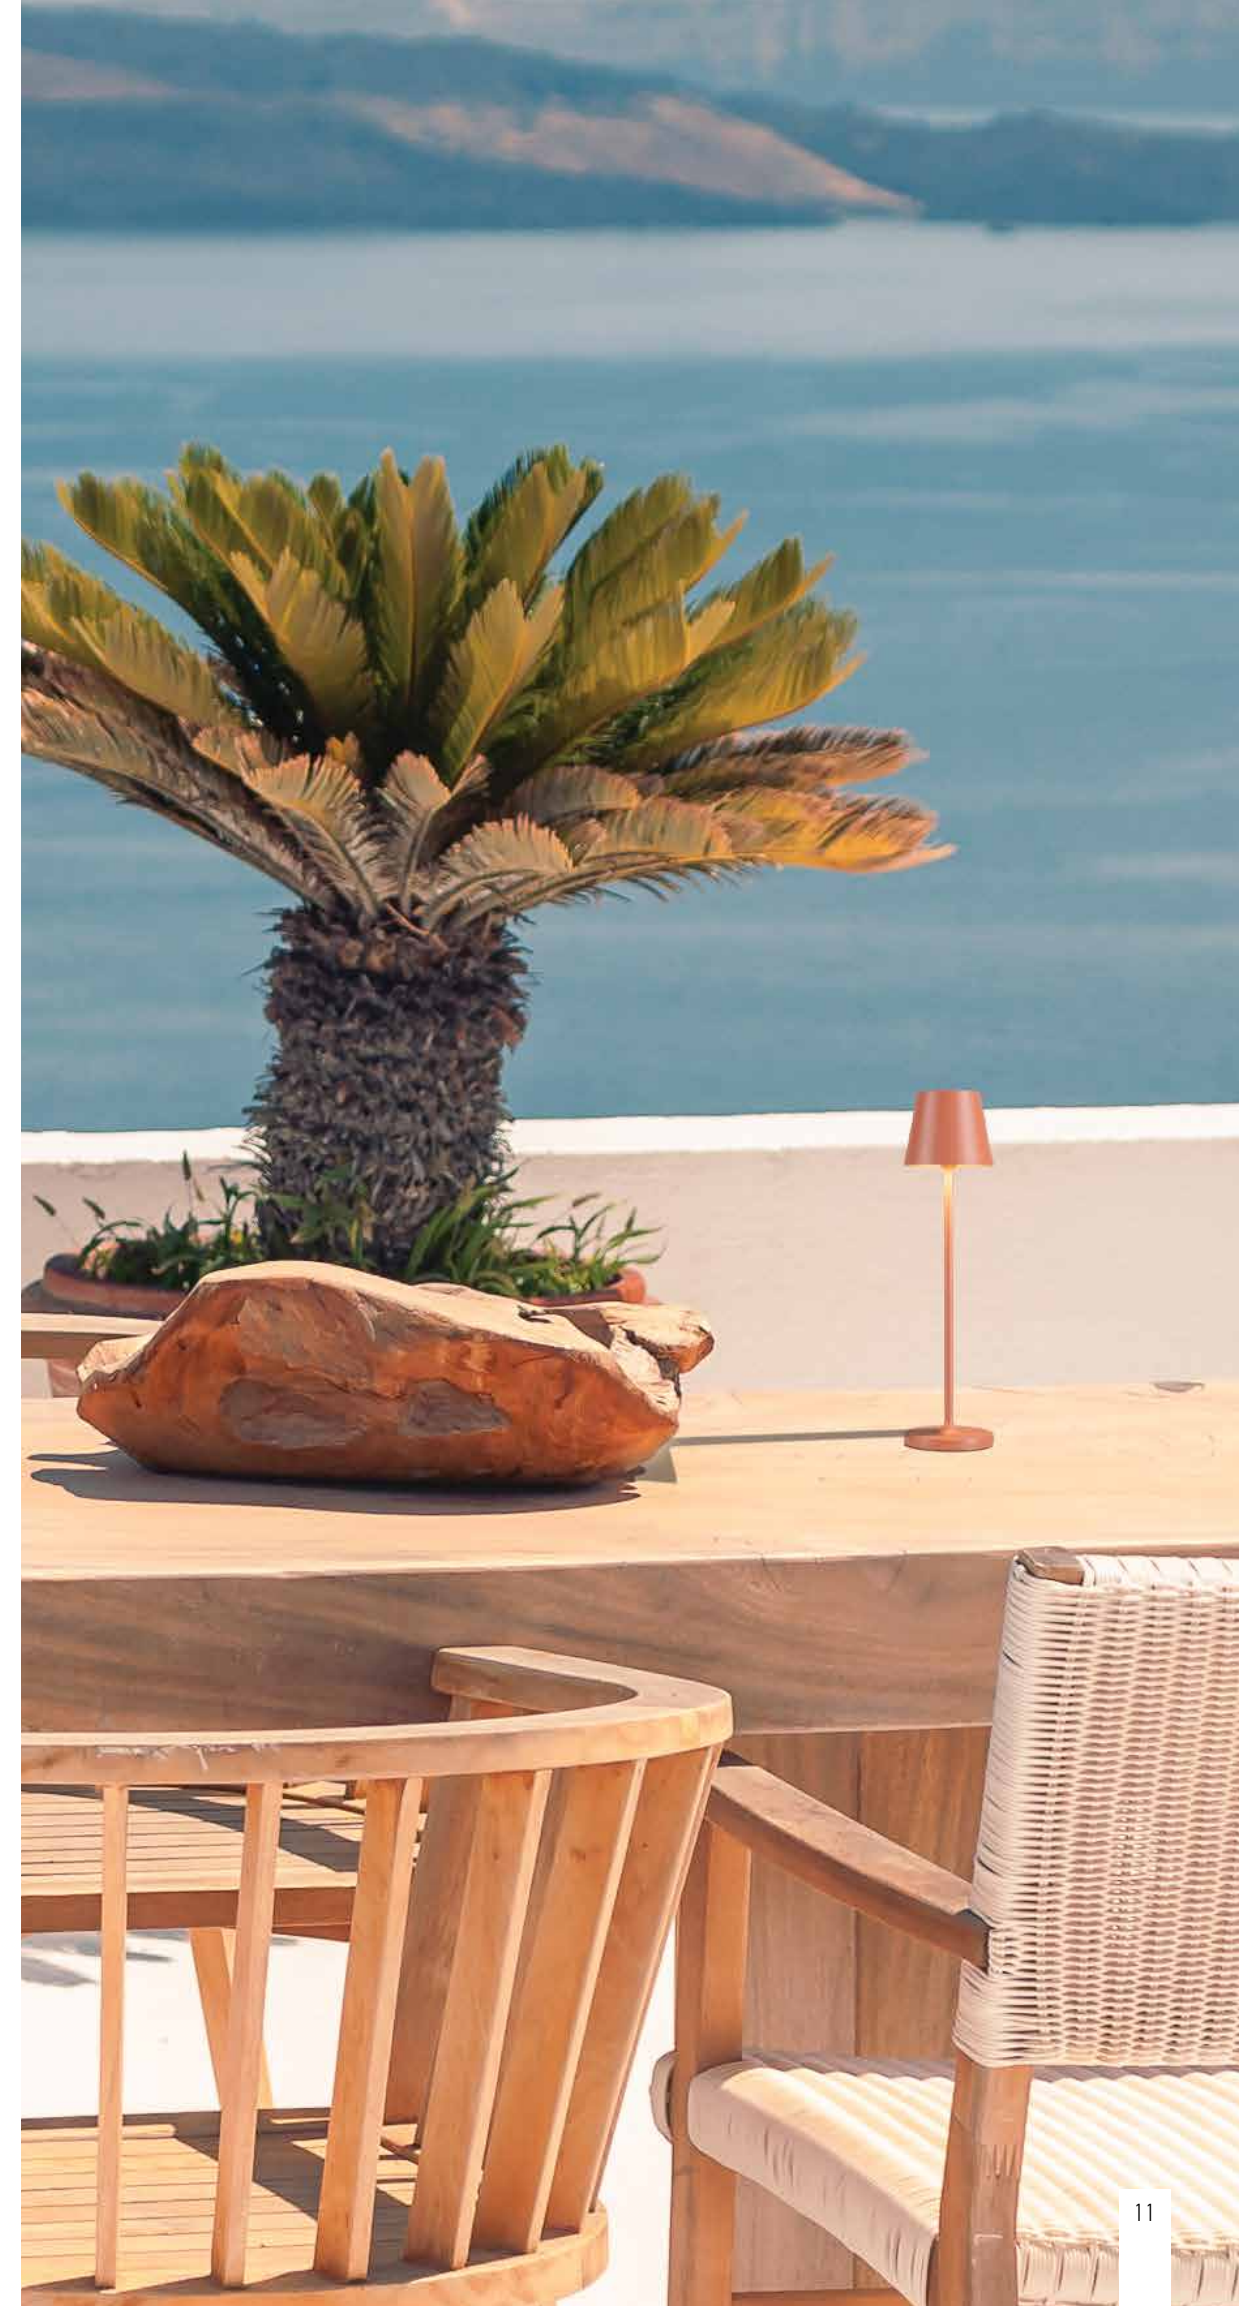

OUTDOOR LIGHTING | PORTABLE




Power 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 99Lm
Cri 80
IP 54
Dimensions Ø: 12cm H: 32cm
3 Steps Dimming 10%, 50%, 100%
Material Aluminium - PC Diffuser
Special Feature Portable Table Lamp
USB Cable & Adaptor Included
Color Sandy Black / **Code E314**
Color Sandy White / **Code E313**

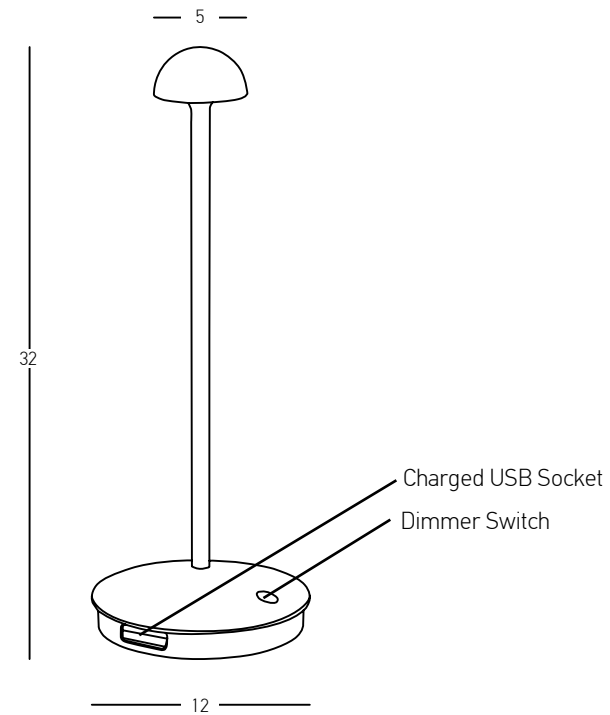



Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 168Lm
 Cri 80
 IP 44
 Dimensions Ø: 5.5cm H: 26.5cm
 3 Steps Dimming 10%, 50%, 100%
 Material Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 Charging Base with USB Cable Included


Color White / **Code E398**
 Color Black / **Code E399**
 Color Green / **Code E400**

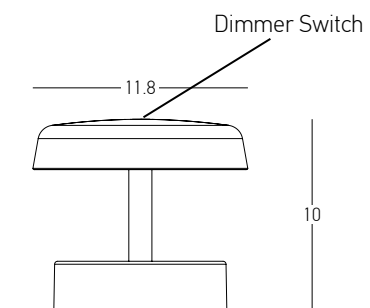

Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 142Lm
 Cri 80
 IP 44
 Dimensions Ø: 11.8cm H: 10cm
 Shade Ø: 11.8cm H: 2cm
 3 Steps Dimming 10%, 50%, 100%
 Material Plastic
 Special Feature Portable Table Lamp
 USB Cable Included

Color White / **Code E401**
 Color Black / **Code E402**





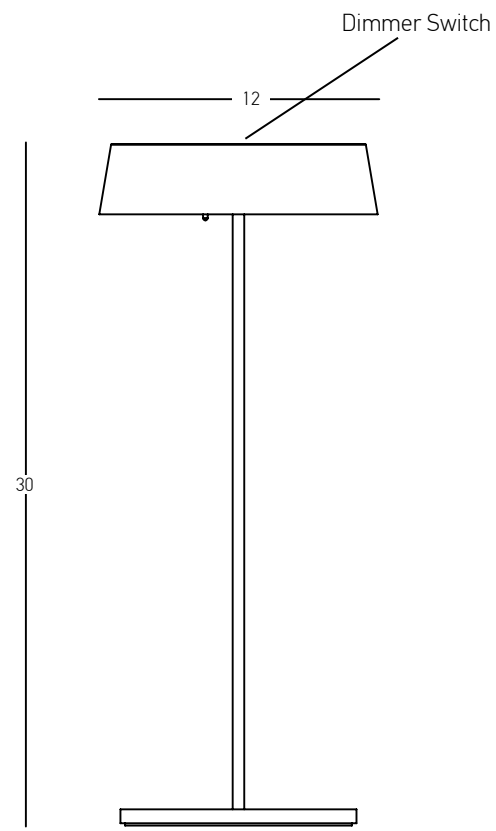


Power	2.2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	210Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 30cm
3 Steps Dimming	10%, 50%, 100%
Material	Aluminium - PC Diffuser
Special Feature	Shade Ø: 12cm H: 5cm Portable Table Lamp USB Cable & Adaptor Included
Color	Sandy Black / Code E289
Color	Sandy White / Code E290
Color	Gold Matt / Code E291



☀ Touch Dimming ☀

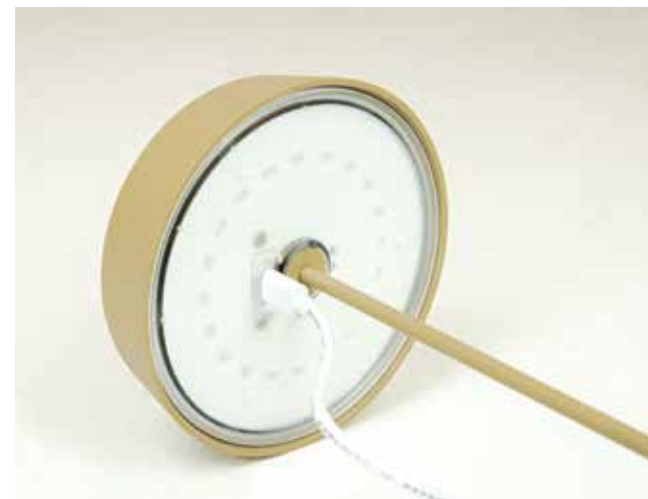

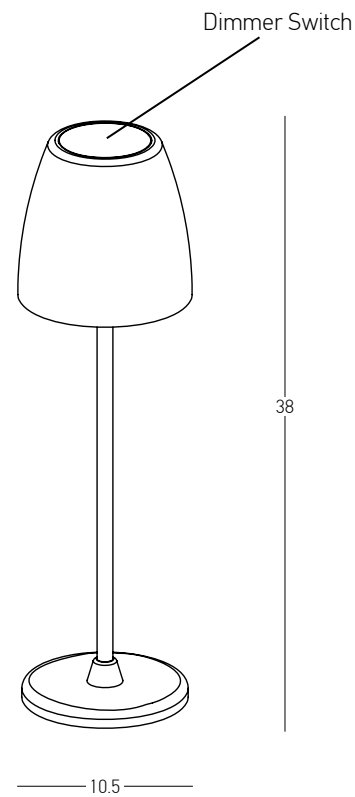


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 260Lm
 Cri 80
 IP 54
 Dimensions Ø: 10.5cm H: 38cm
 Shade Ø: 11cm H: 11cm
 3 Steps Dimming 10%, 50%, 100%
 Material Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 USB Cable & Adaptor Included

Color Sandy White / **Code E193**
 Color Sandy Black / **Code E194**




FLOOR & WALL | p.020-077



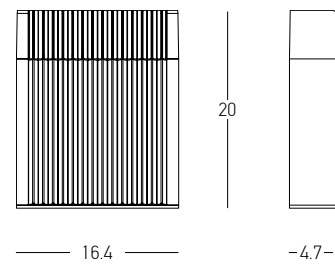

Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 638Lm
 Cri 80
 IP 65
 Dimensions L: 4.7cm W: 16.4cm H: 20cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E353**

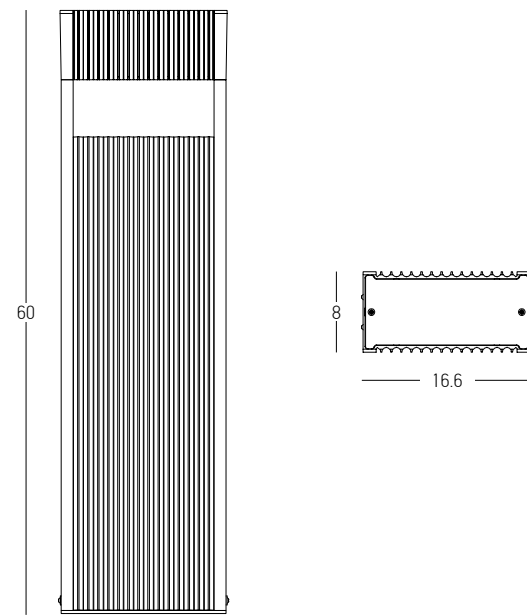


Power 30W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 986Lm
 Cri 80
 IP 65
 Dimensions L: 8m W: 16.6cm H: 60cm
 Material Aluminium - Tempered Glass
 Special Feature Double Sided Lighting
 Color Graphite / **Code E368**






Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 710Lm
Cri 80
IP 54
Dimensions L: 13.5cm W: 10cm H: 65cm
Beam Angle 120°
Material Aluminium - Tempered Glass
Color Graphite / **Code E297**



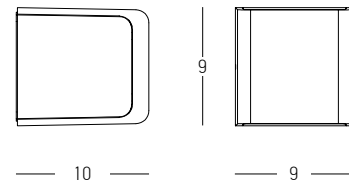


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 767Lm
 Cri 80
 IP 65
 Dimensions L: 10cm W: 9cm H: 9cm
 Material Aluminium
 Special Feature Up - Down Lighting
 Color Graphite / Code E352

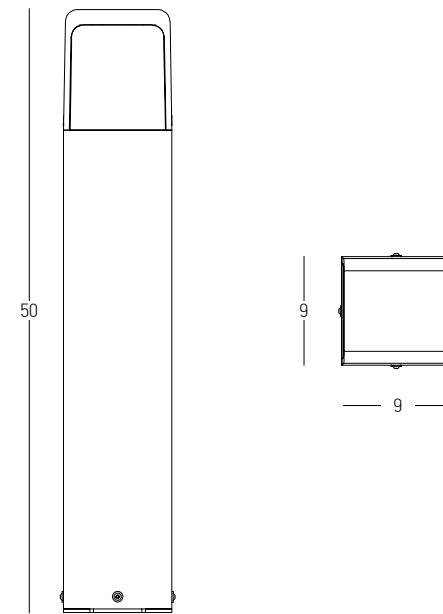


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 767Lm
 Cri 80
 IP 65
 Dimensions L: 9cm W: 9cm H: 50cm
 Material Aluminium
 Special Feature Double Sided Lighting
 Color Graphite / Code E351



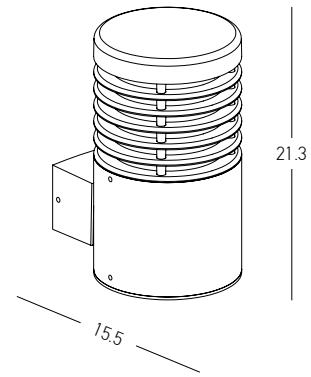


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 919Lm
 Cri 80
 IP 65
 Dimensions Ø: 12cm L: 15.5cm H: 21.3cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E344**

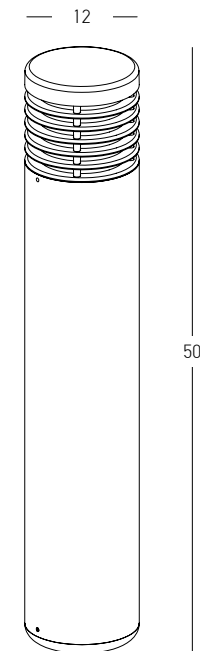


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 923Lm
 Cri 80
 IP 65
 Dimensions Ø: 12cm H: 50cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E345**



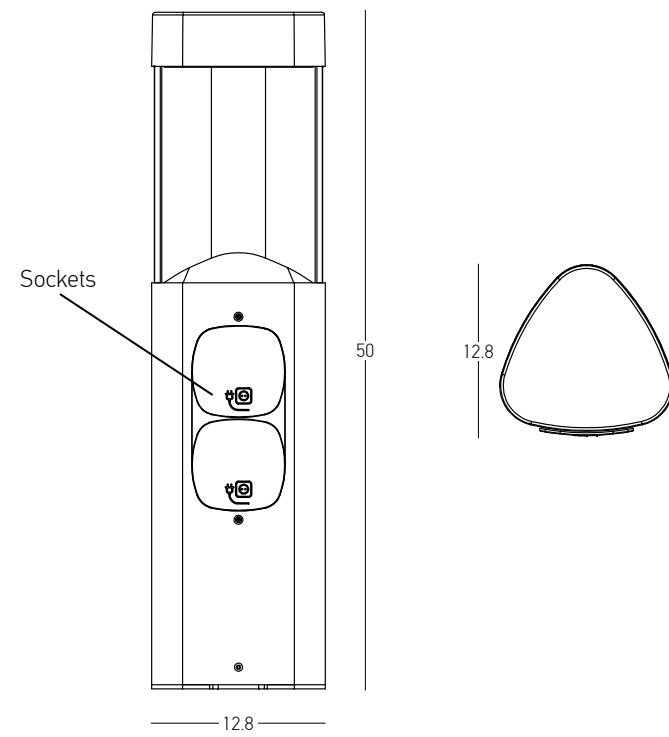



Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 639Lm
 Cri 80
 IP 54
 Dimensions L: 12.8cm W: 12.8cm H: 50cm
 Material Aluminium - PC Diffuser
 Special Feature 2 European Sockets 220-240V
 Color Graphite / **Code E354**



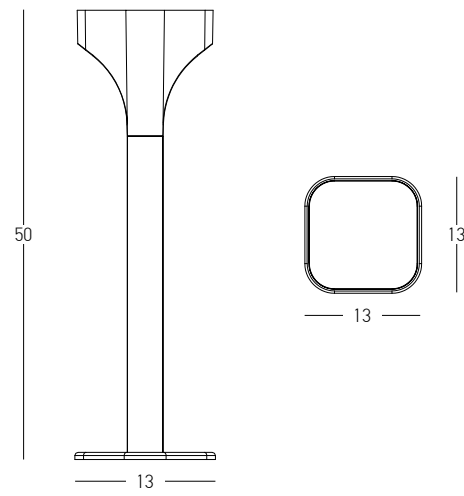


Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 993Lm
Cri 80
IP 65
Dimensions L: 13cm W: 13cm H: 50cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Special Feature Double Sided Lighting
Color Graphite / **Code E356**



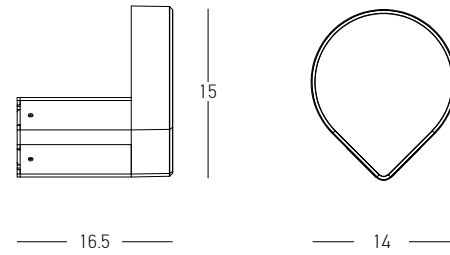


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1035Lm
 Cri 80
 IP 65
 Dimensions L: 16.5cm W: 14cm H: 15cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E358**

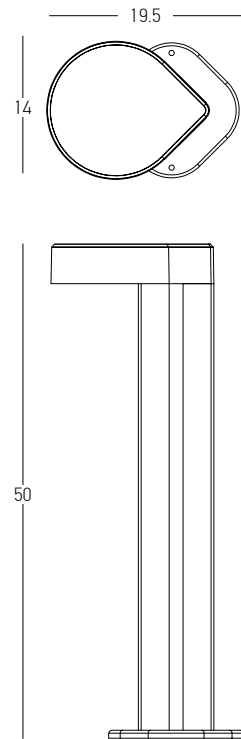


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1035Lm
 Cri 80
 IP 65
 Dimensions L: 19.5cm W: 14cm H: 50cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E357**




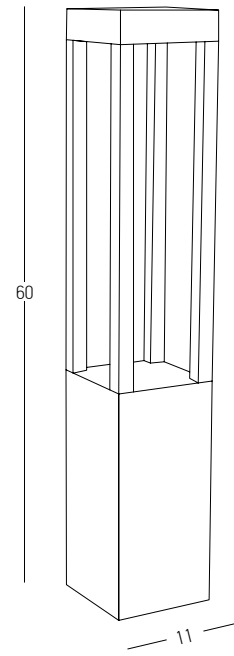


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 658Lm
 Cri 80
 IP 67
 Dimensions L: 11cm W: 11cm H: 60cm
 Beam Angle 120°
 Material Aluminium - Clear Glass
 Color Graphite / **Code E367**

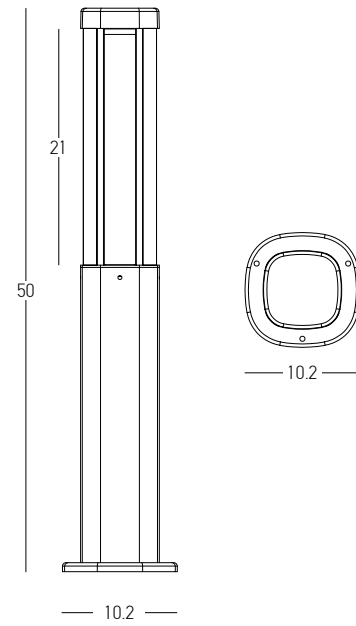


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 533Lm
 Cri 80
 IP 54
 Dimensions L: 10.2cm W: 10.2cm H: 50cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E355**

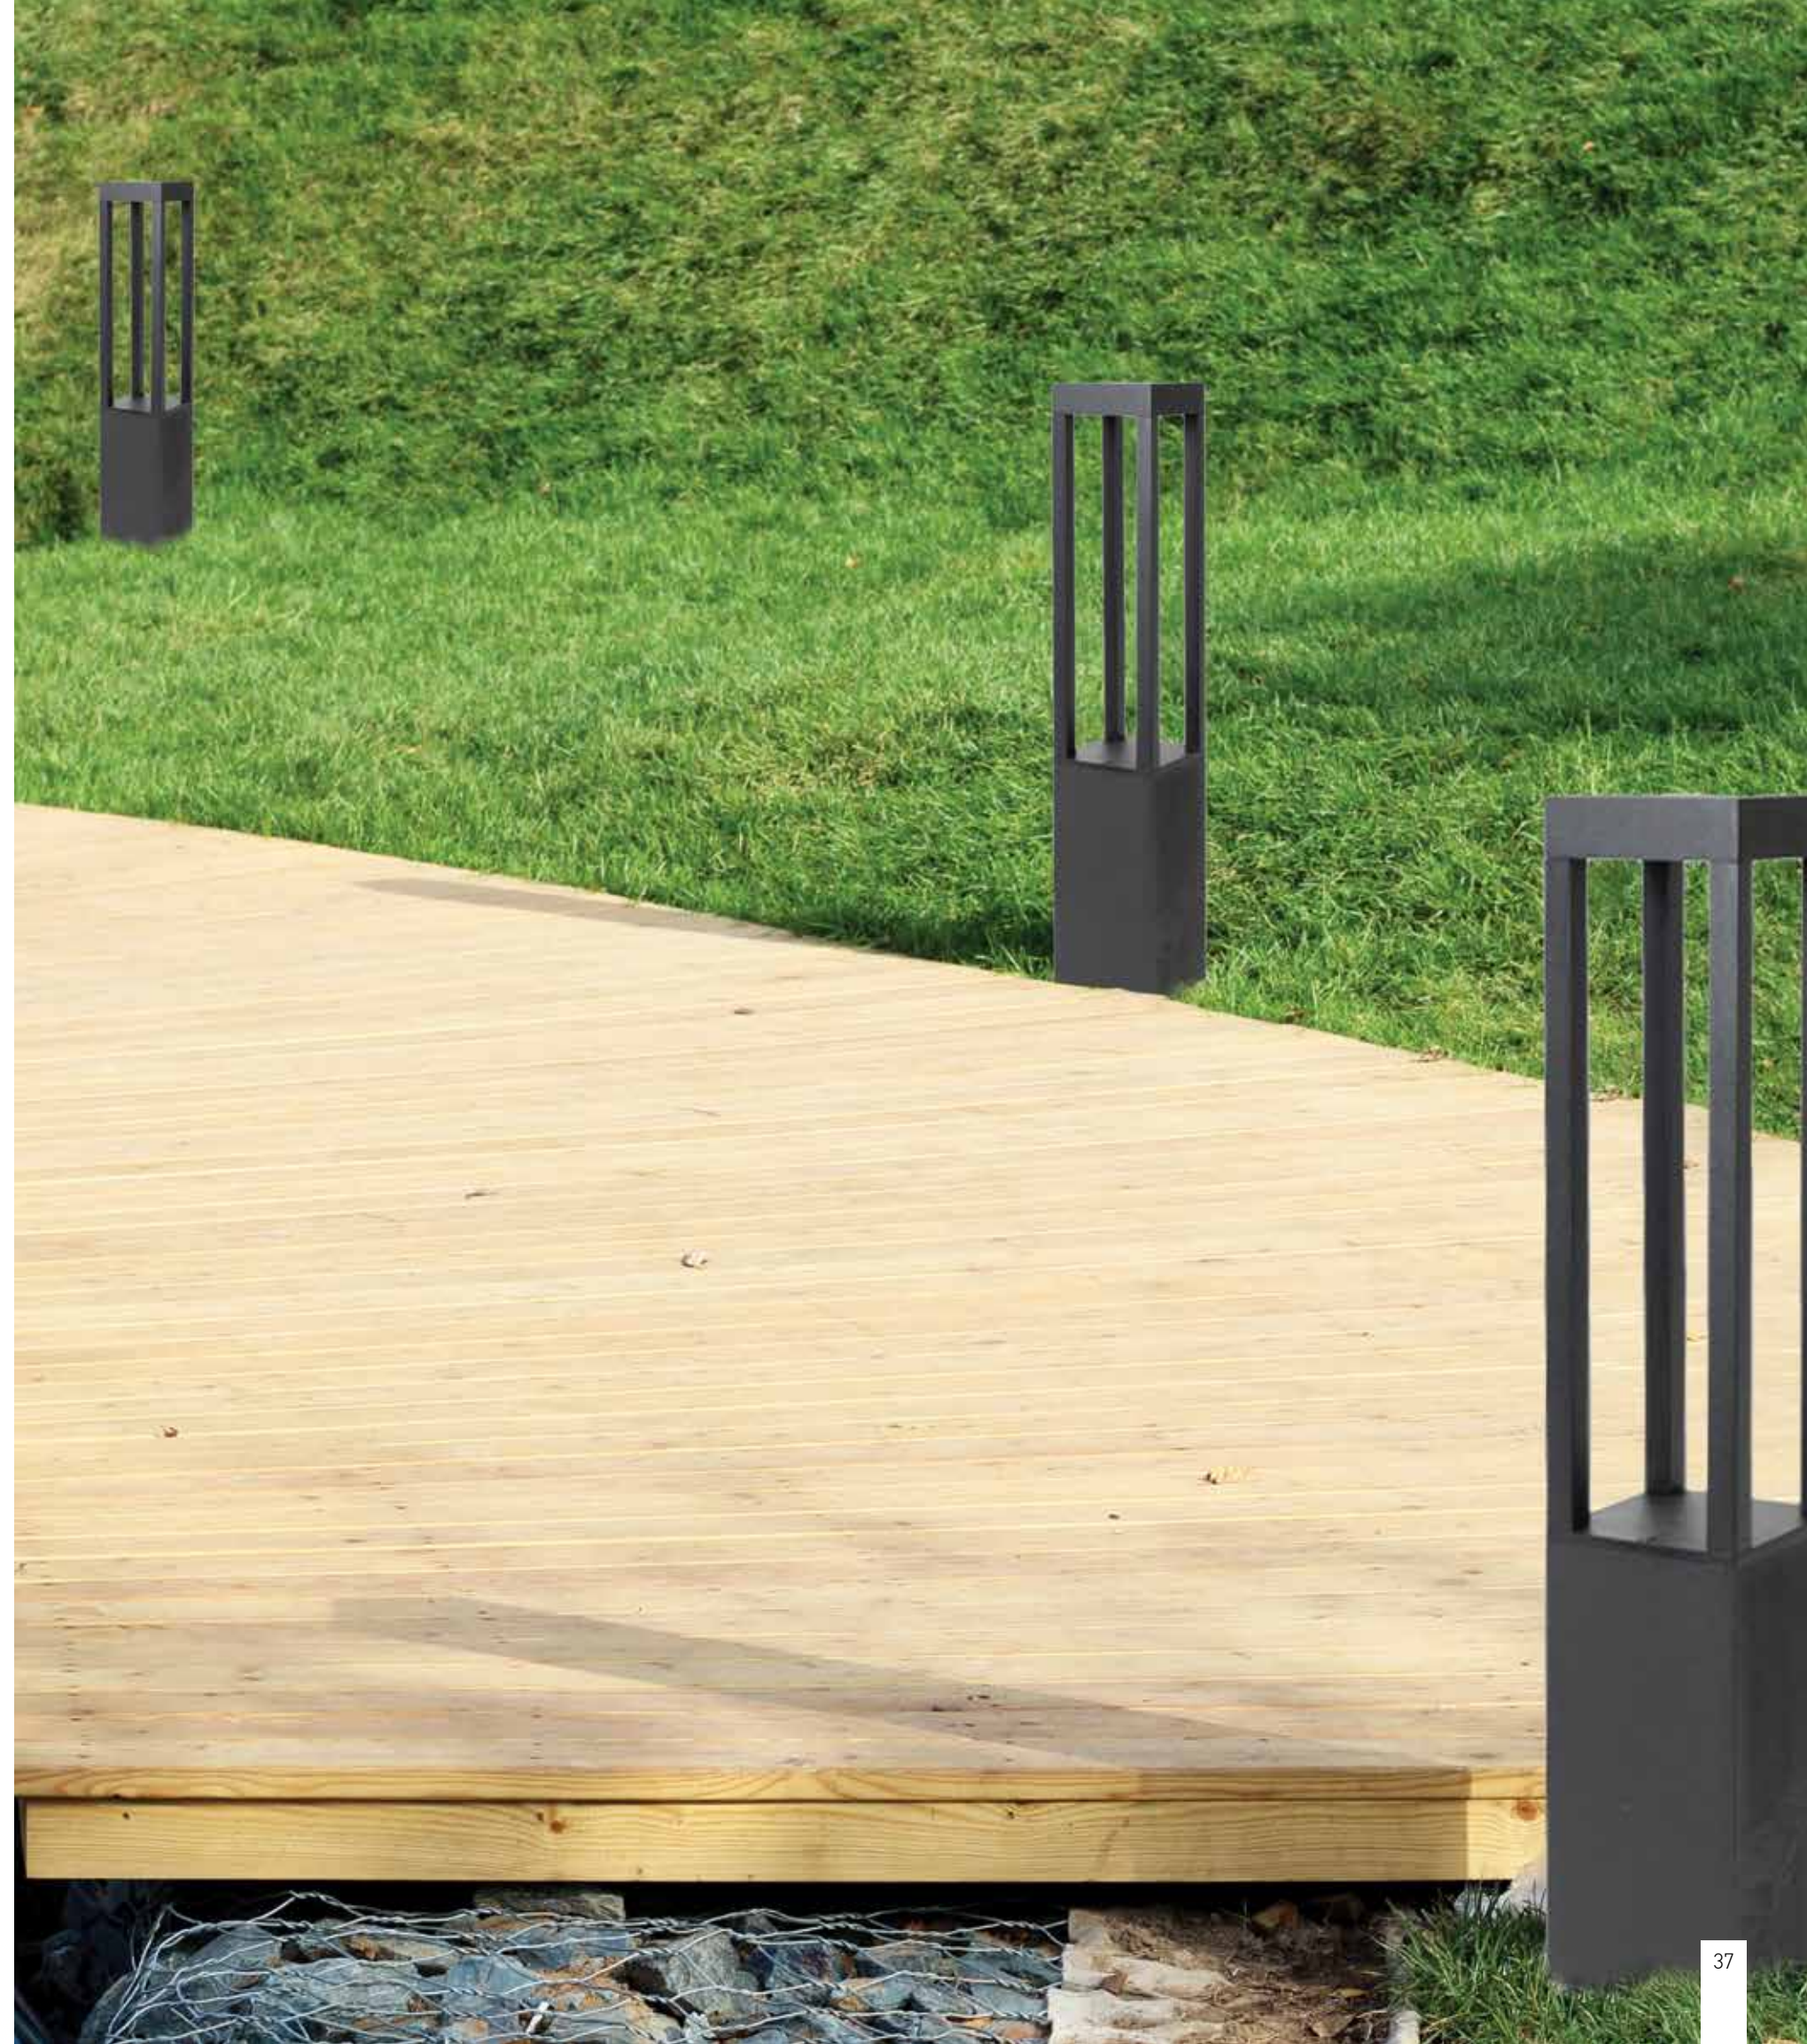

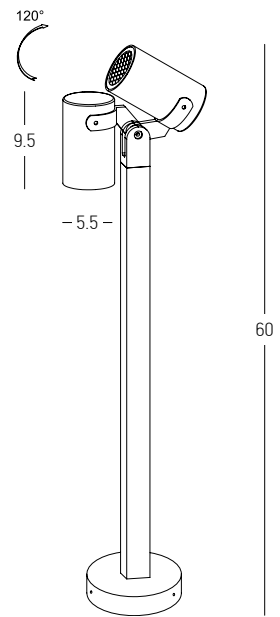


Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 11.5cm W: 5.5cm H: 60cm
 Base Ø: 11.5cm H: 3cm
 Spot Dimensions Ø: 5.5cm L: 9.5cm
 Material Aluminium - Tempered Glass
 Special Feature Movable Spot
 Honeycomb Included
 Color Graphite / **Code E325**






Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 920Lm
 Cri 80
 IP 54
 Dimensions Ø: 15cm L: 5.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E237**

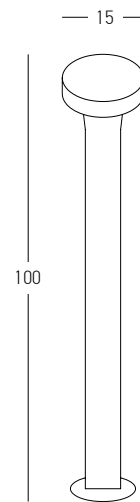


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 792Lm
 Cri 80
 IP 65
 Dimensions Ø: 15cm H: 100cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E249**




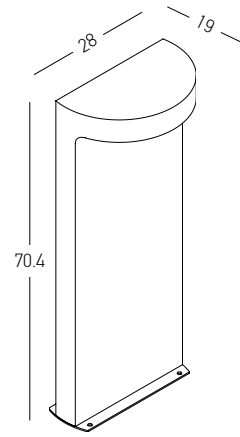


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 80
 IP 65
 Dimensions L: 19cm W: 28cm H: 70.4cm
 Material Concrete
 Color Natural Concrete / **Code E383**

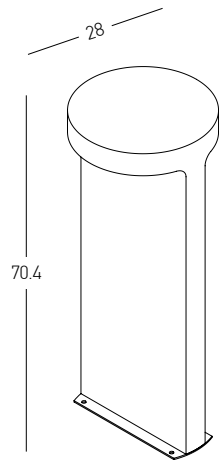


Power 2x 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 780Lm
 Cri 80
 IP 65
 Dimensions Ø: 28cm H: 70.4cm
 Material Concrete
 Color Natural Concrete / **Code E384**

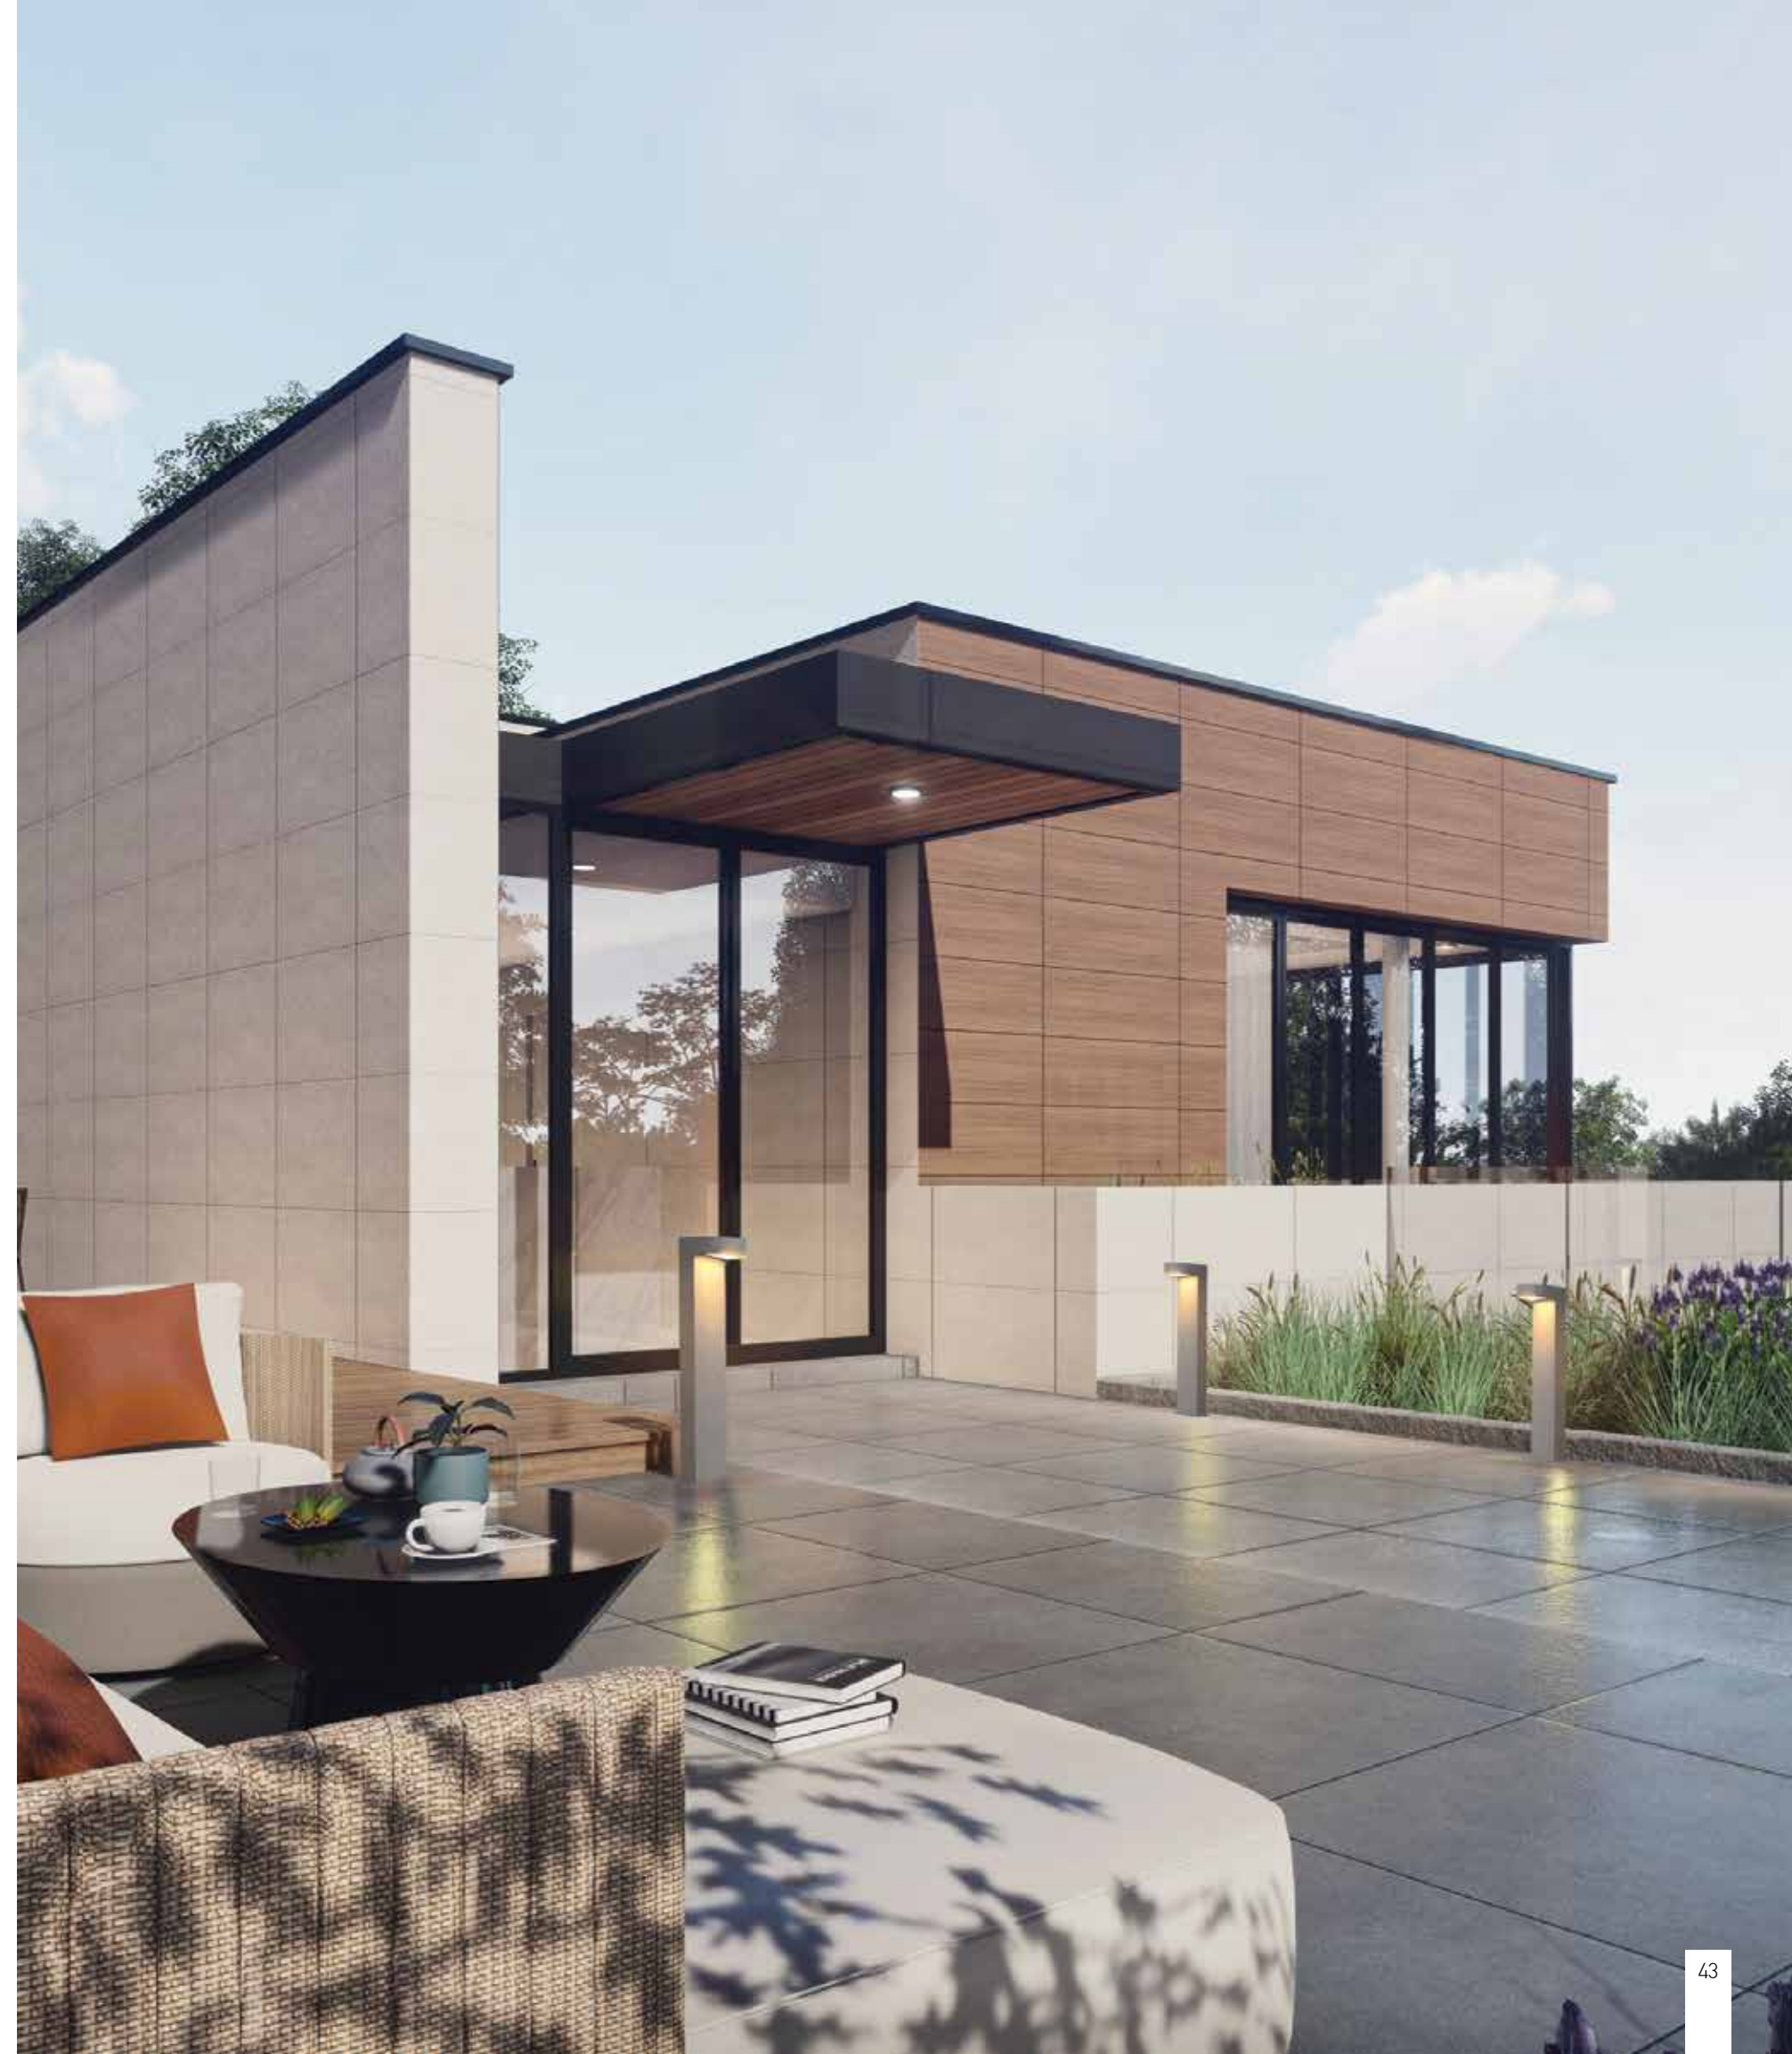


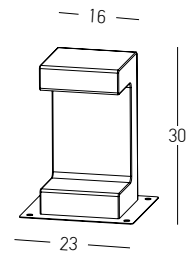


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 90
 IP 54
 Dimensions L: 15cm W: 16cm H: 30cm
 Base L: 21cm W: 23cm
 Material Concrete
 Color Natural Concrete / **Code E191**

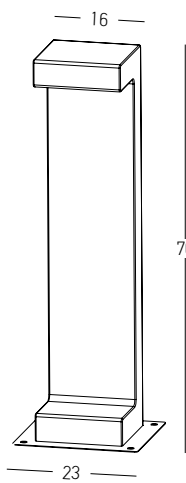


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 90
 IP 54
 Dimensions L: 15cm W: 16cm H: 70cm
 Base L: 21cm W: 23cm
 Material Concrete
 Color Natural Concrete / **Code E192**

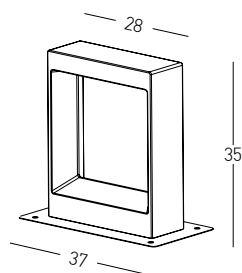


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 90
 IP 54
 Dimensions L: 10cm W: 28cm H: 35cm
 Base L: 19cm W: 37cm
 Material Concrete
 Color Natural Concrete / **Code E190**






Power 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 340Lm
 Cri 80
 IP 65
 Dimensions L: 9.7cm W: 9.1cm H: 10.5cm
 Beam Angle 36°
 Dimmable Triac
 Material Concrete - Aluminium
 Color Natural Concrete / **Code E253**

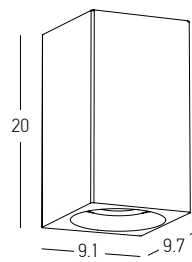


Power 2x 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 600Lm
 Cri 80
 IP 65
 Dimensions L: 9.7cm W: 9.1cm H: 20cm
 Beam Angle 36°
 Dimmable Triac
 Material Concrete - Aluminium
 Color Natural Concrete / **Code E254**




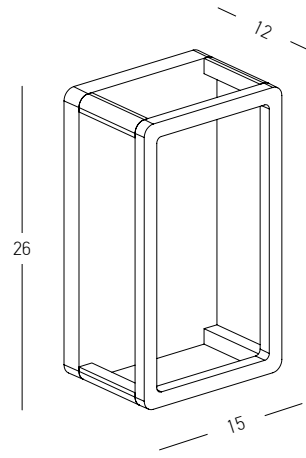


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 481Lm
 Cri 80
 IP 65
 Dimensions L: 12cm W: 15cm H: 26cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E336**

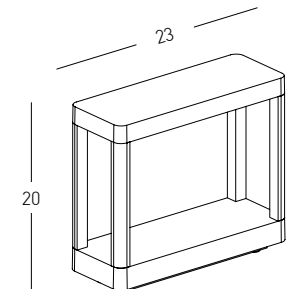


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 587Lm
 Cri 80
 IP 65
 Dimensions L: 8.5cm W: 23cm H: 20cm
 Material Aluminium - Clear Glass
 Color Graphite / **Code E334**

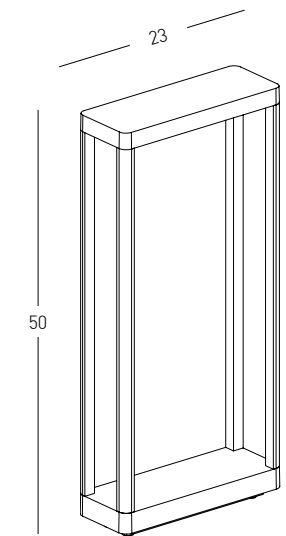

Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 587Lm
 Cri 80
 IP 65
 Dimensions L: 8.5cm W: 23cm H: 50cm
 Material Aluminium - Clear Glass
 Color Graphite / **Code E335**

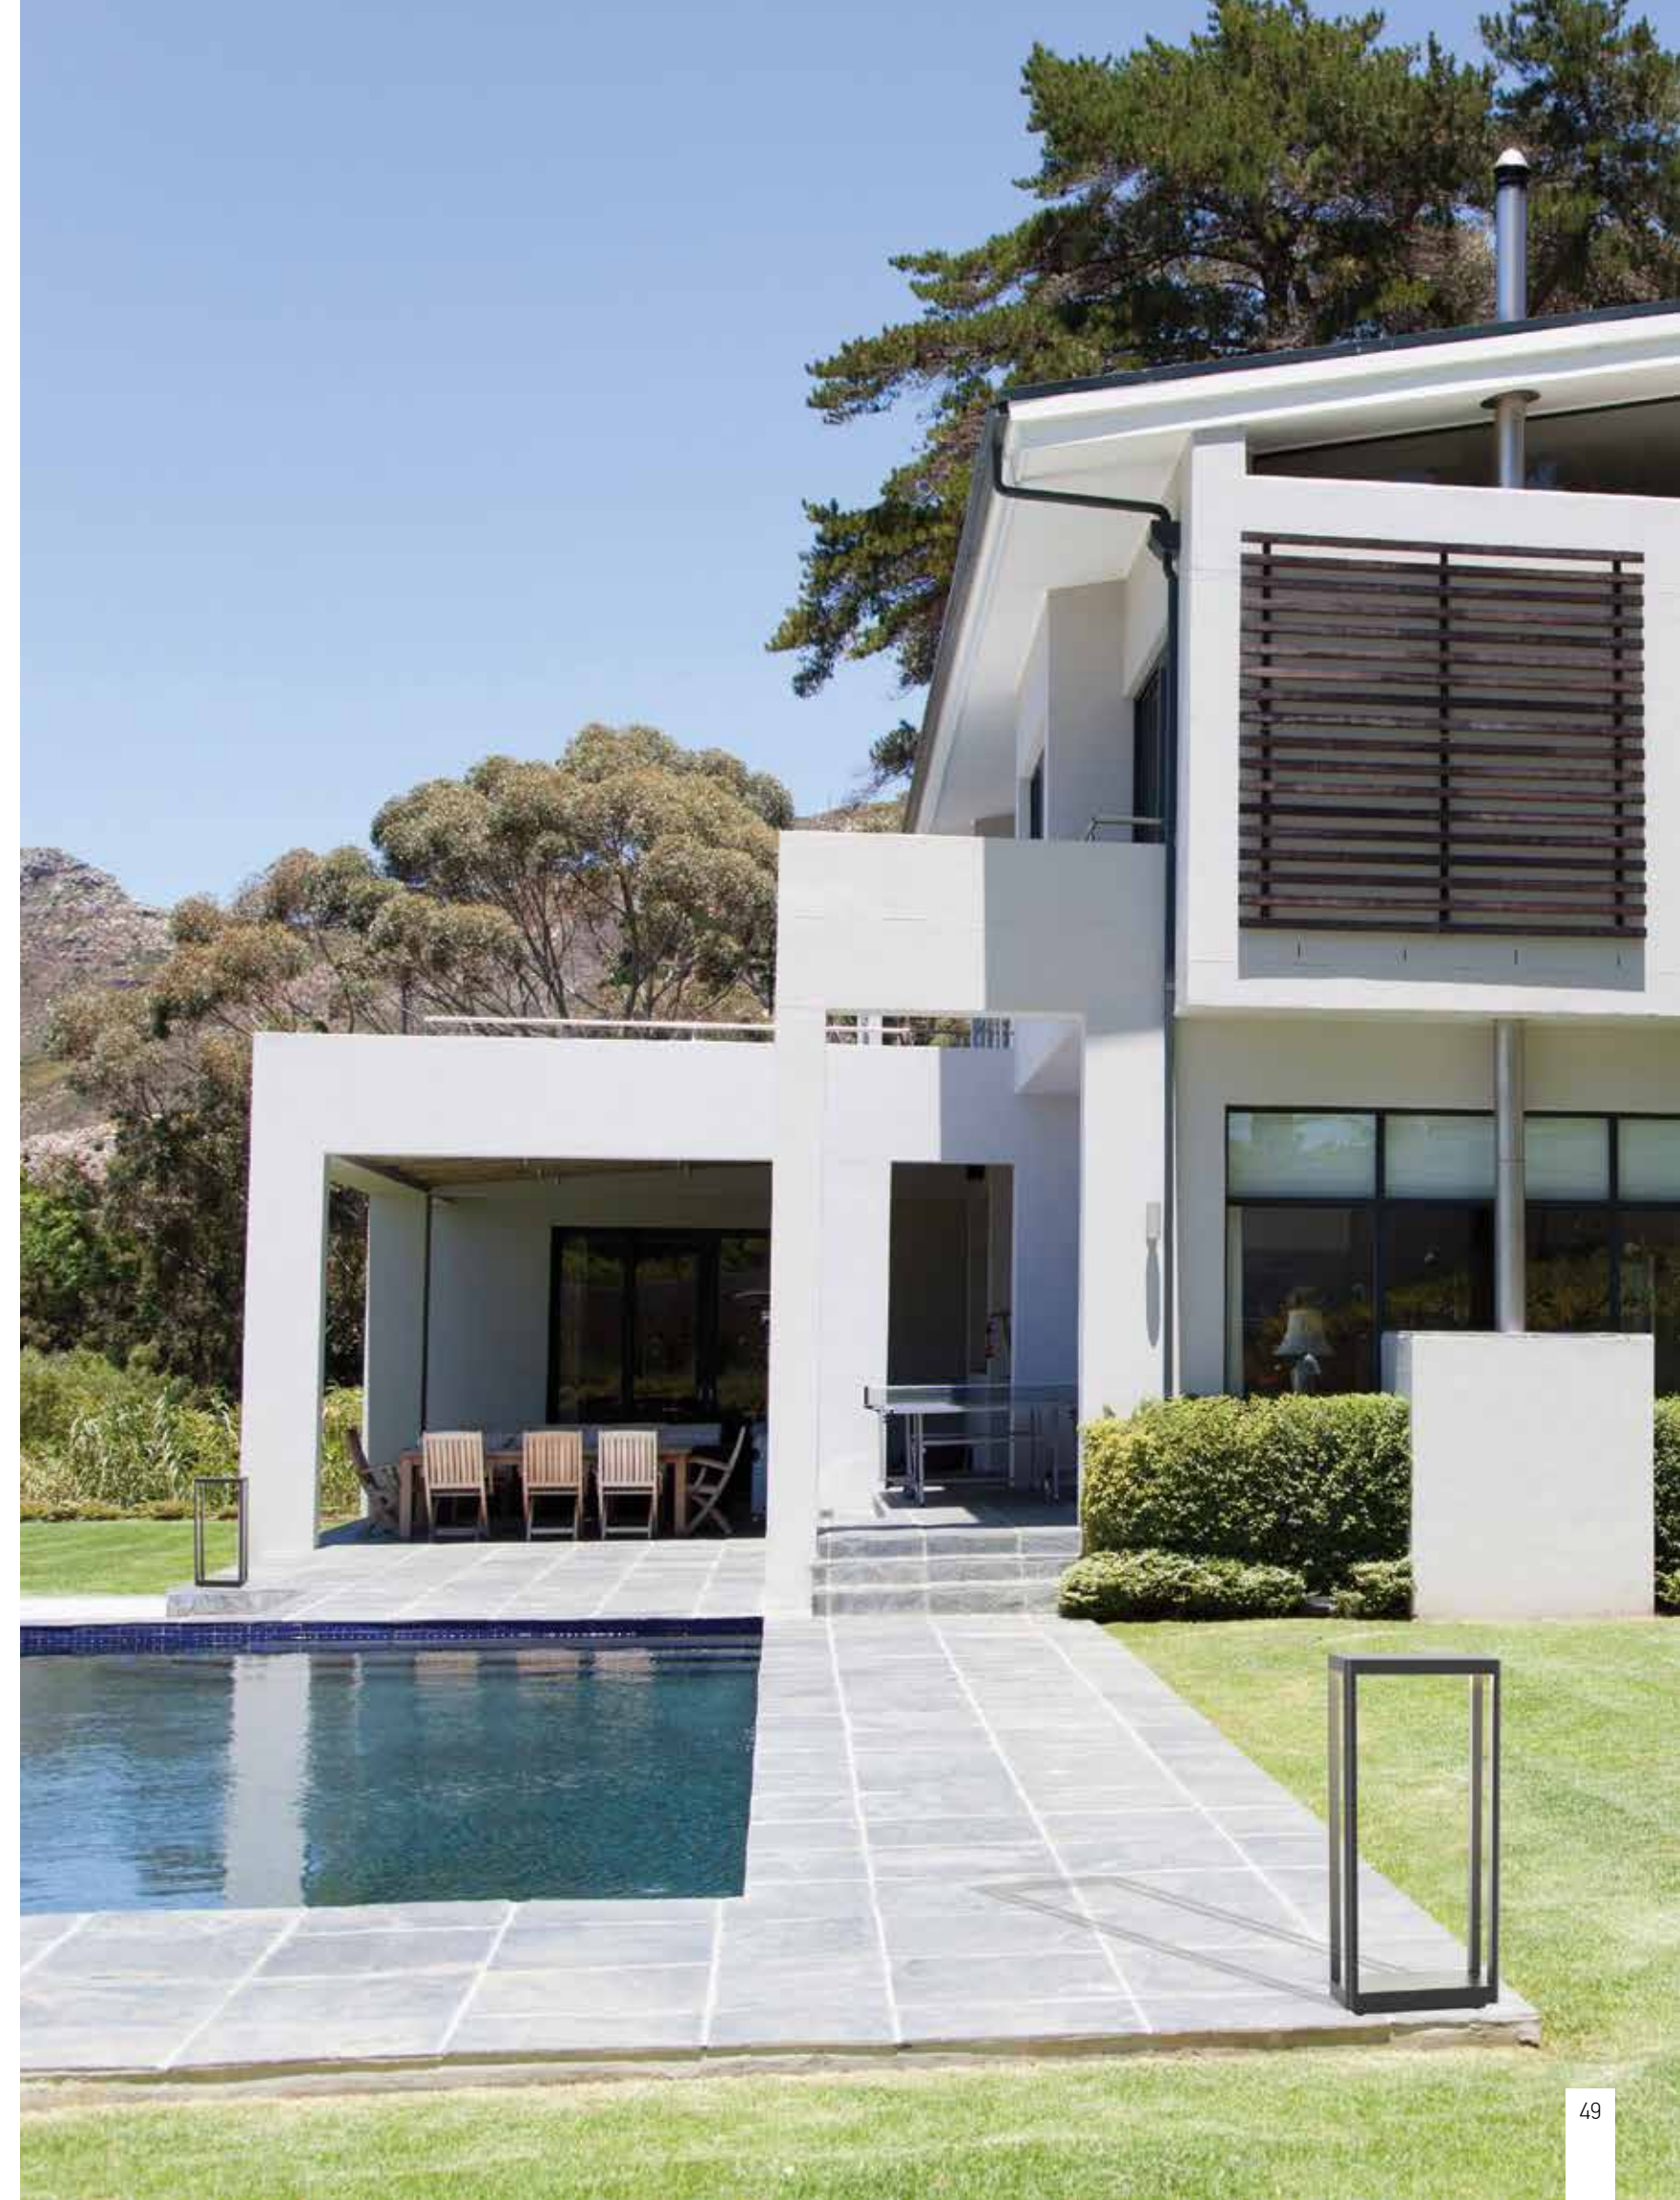




23

18


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 704Lm
 Cri 80
 IP 54
 Dimensions L: 18cm W: 18cm H: 23cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E203**

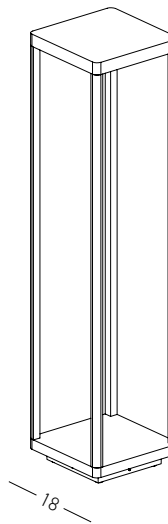


80


18


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 704Lm
 Cri 80
 IP 54
 Dimensions L: 18cm W: 18cm H: 80cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E204**

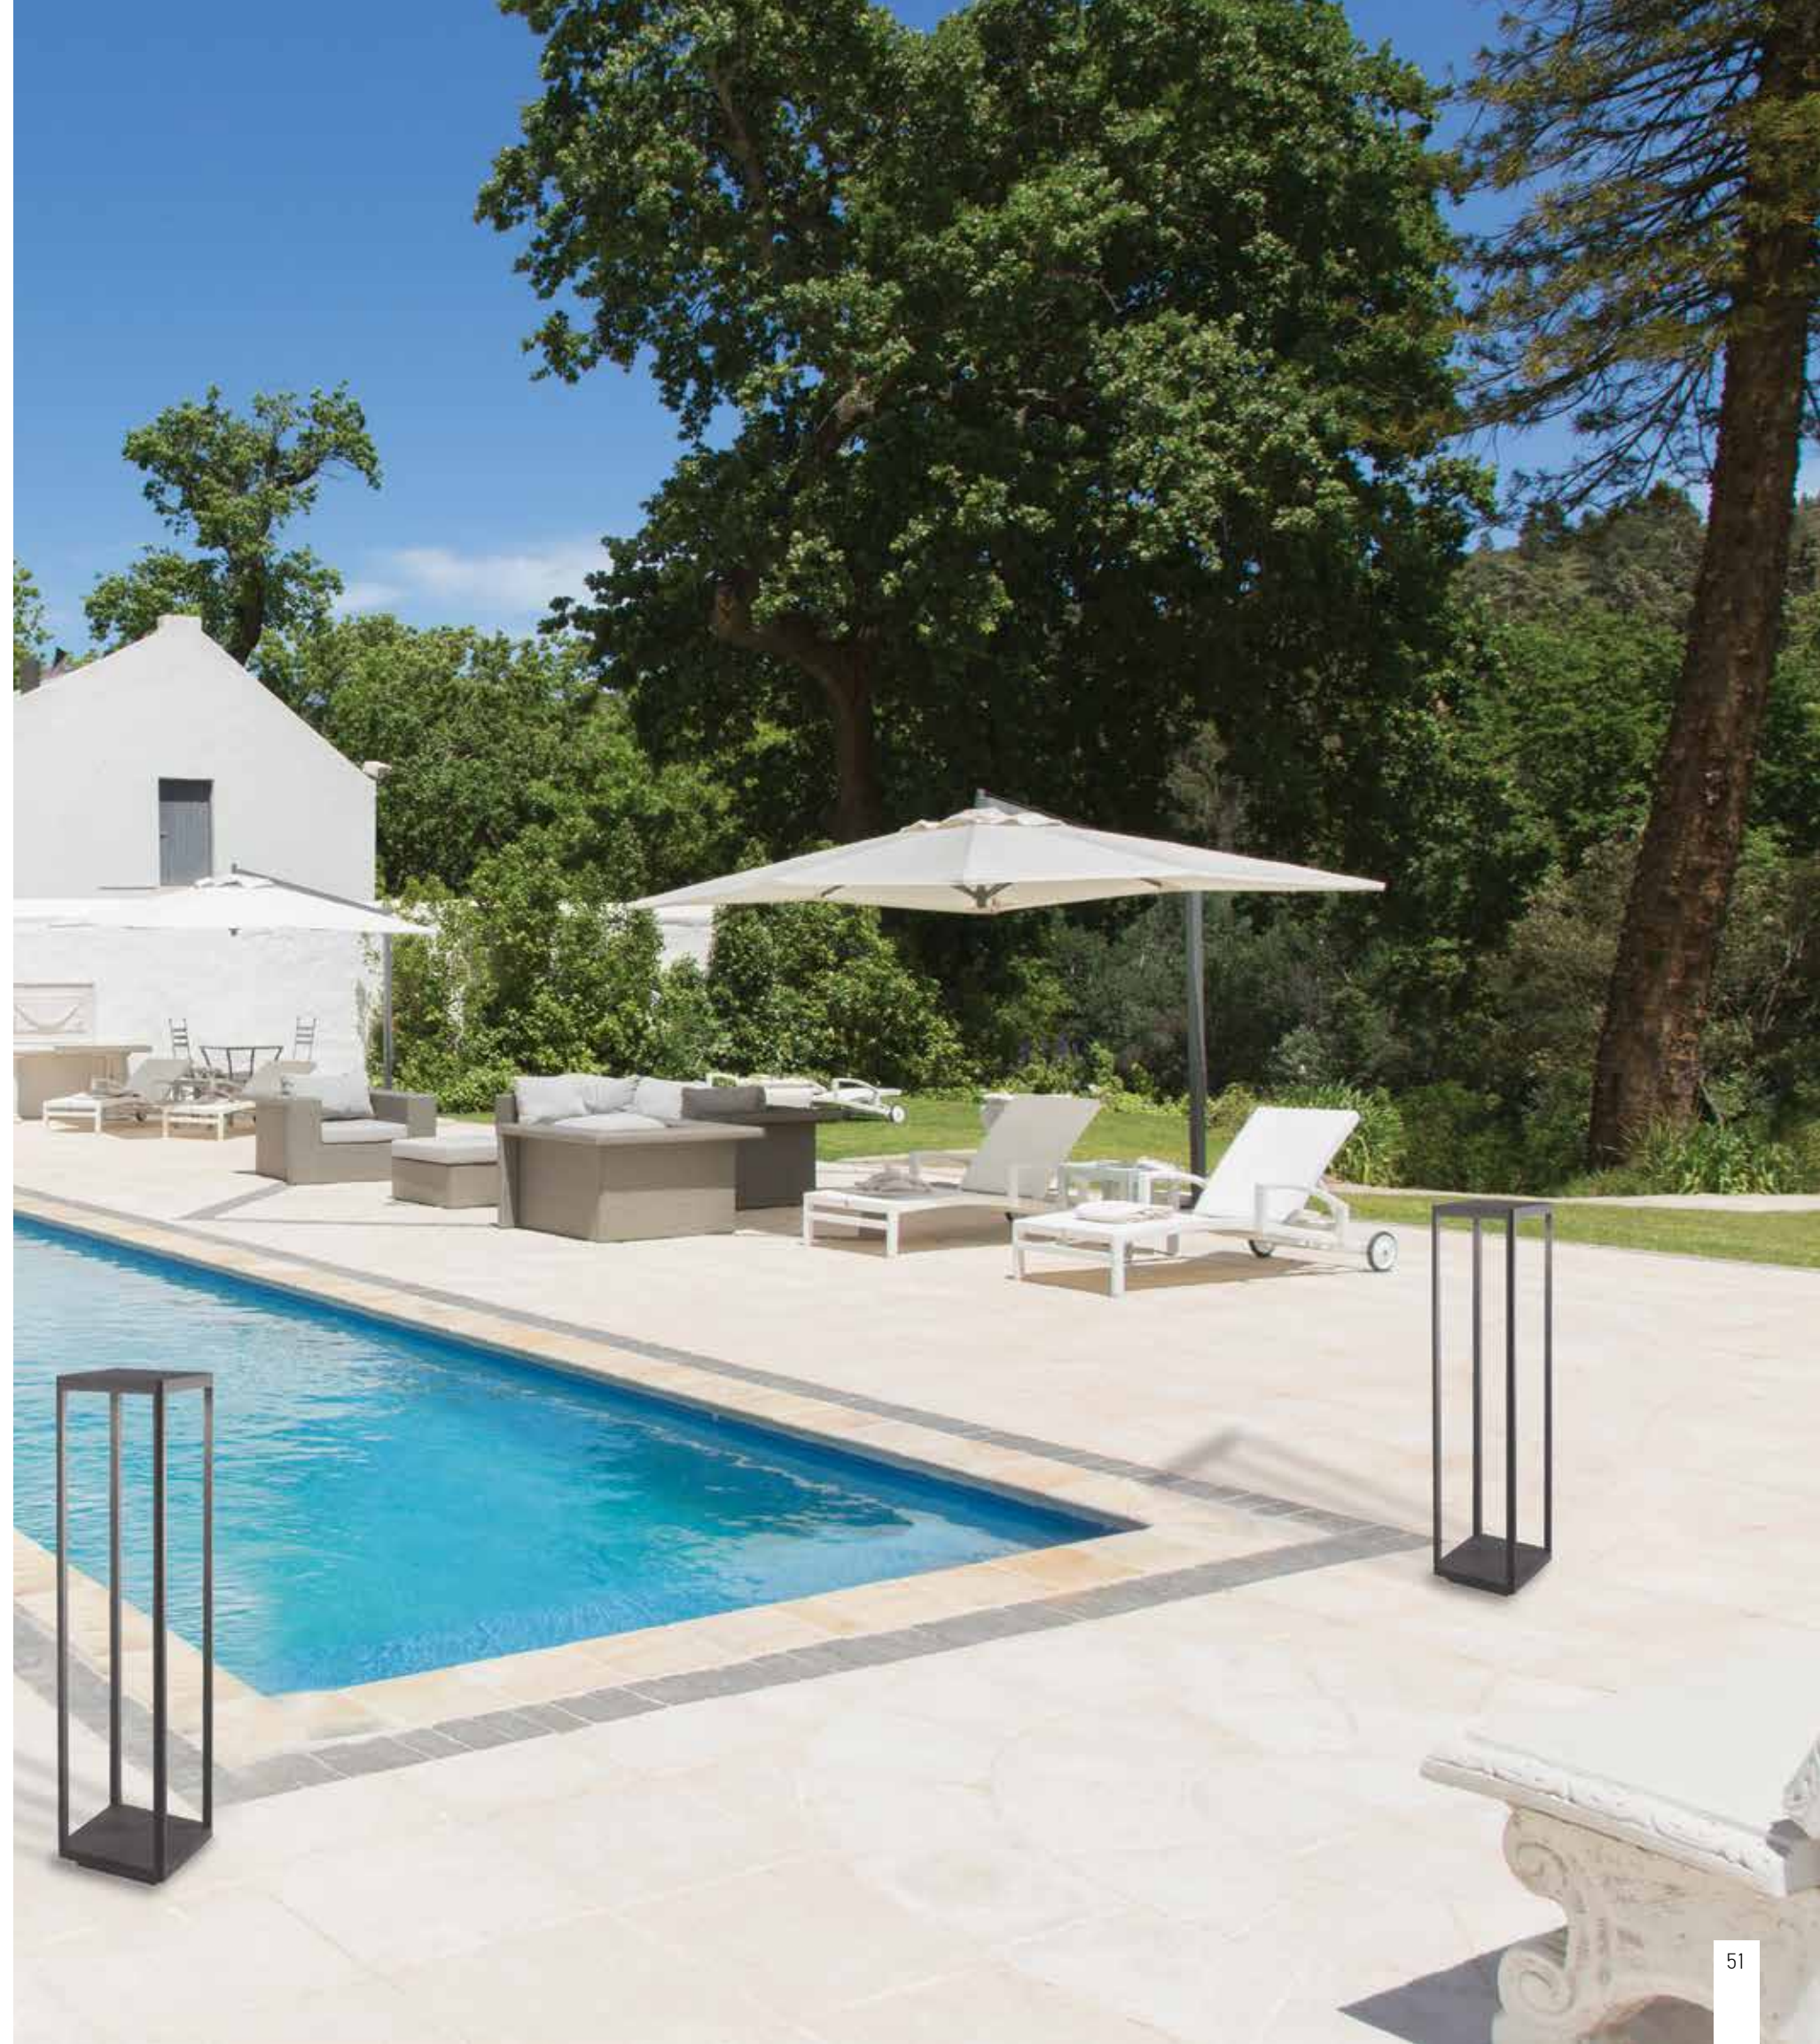

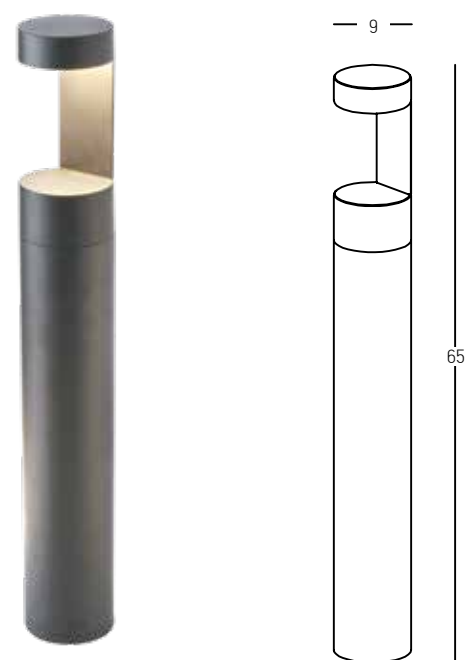


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1180Lm
Cri	90
IP	54
Dimensions	Ø: 9cm H: 65cm
Beam Angle	120°
Material	Aluminium - Tempered Glass
Color	Graphite / Code E298

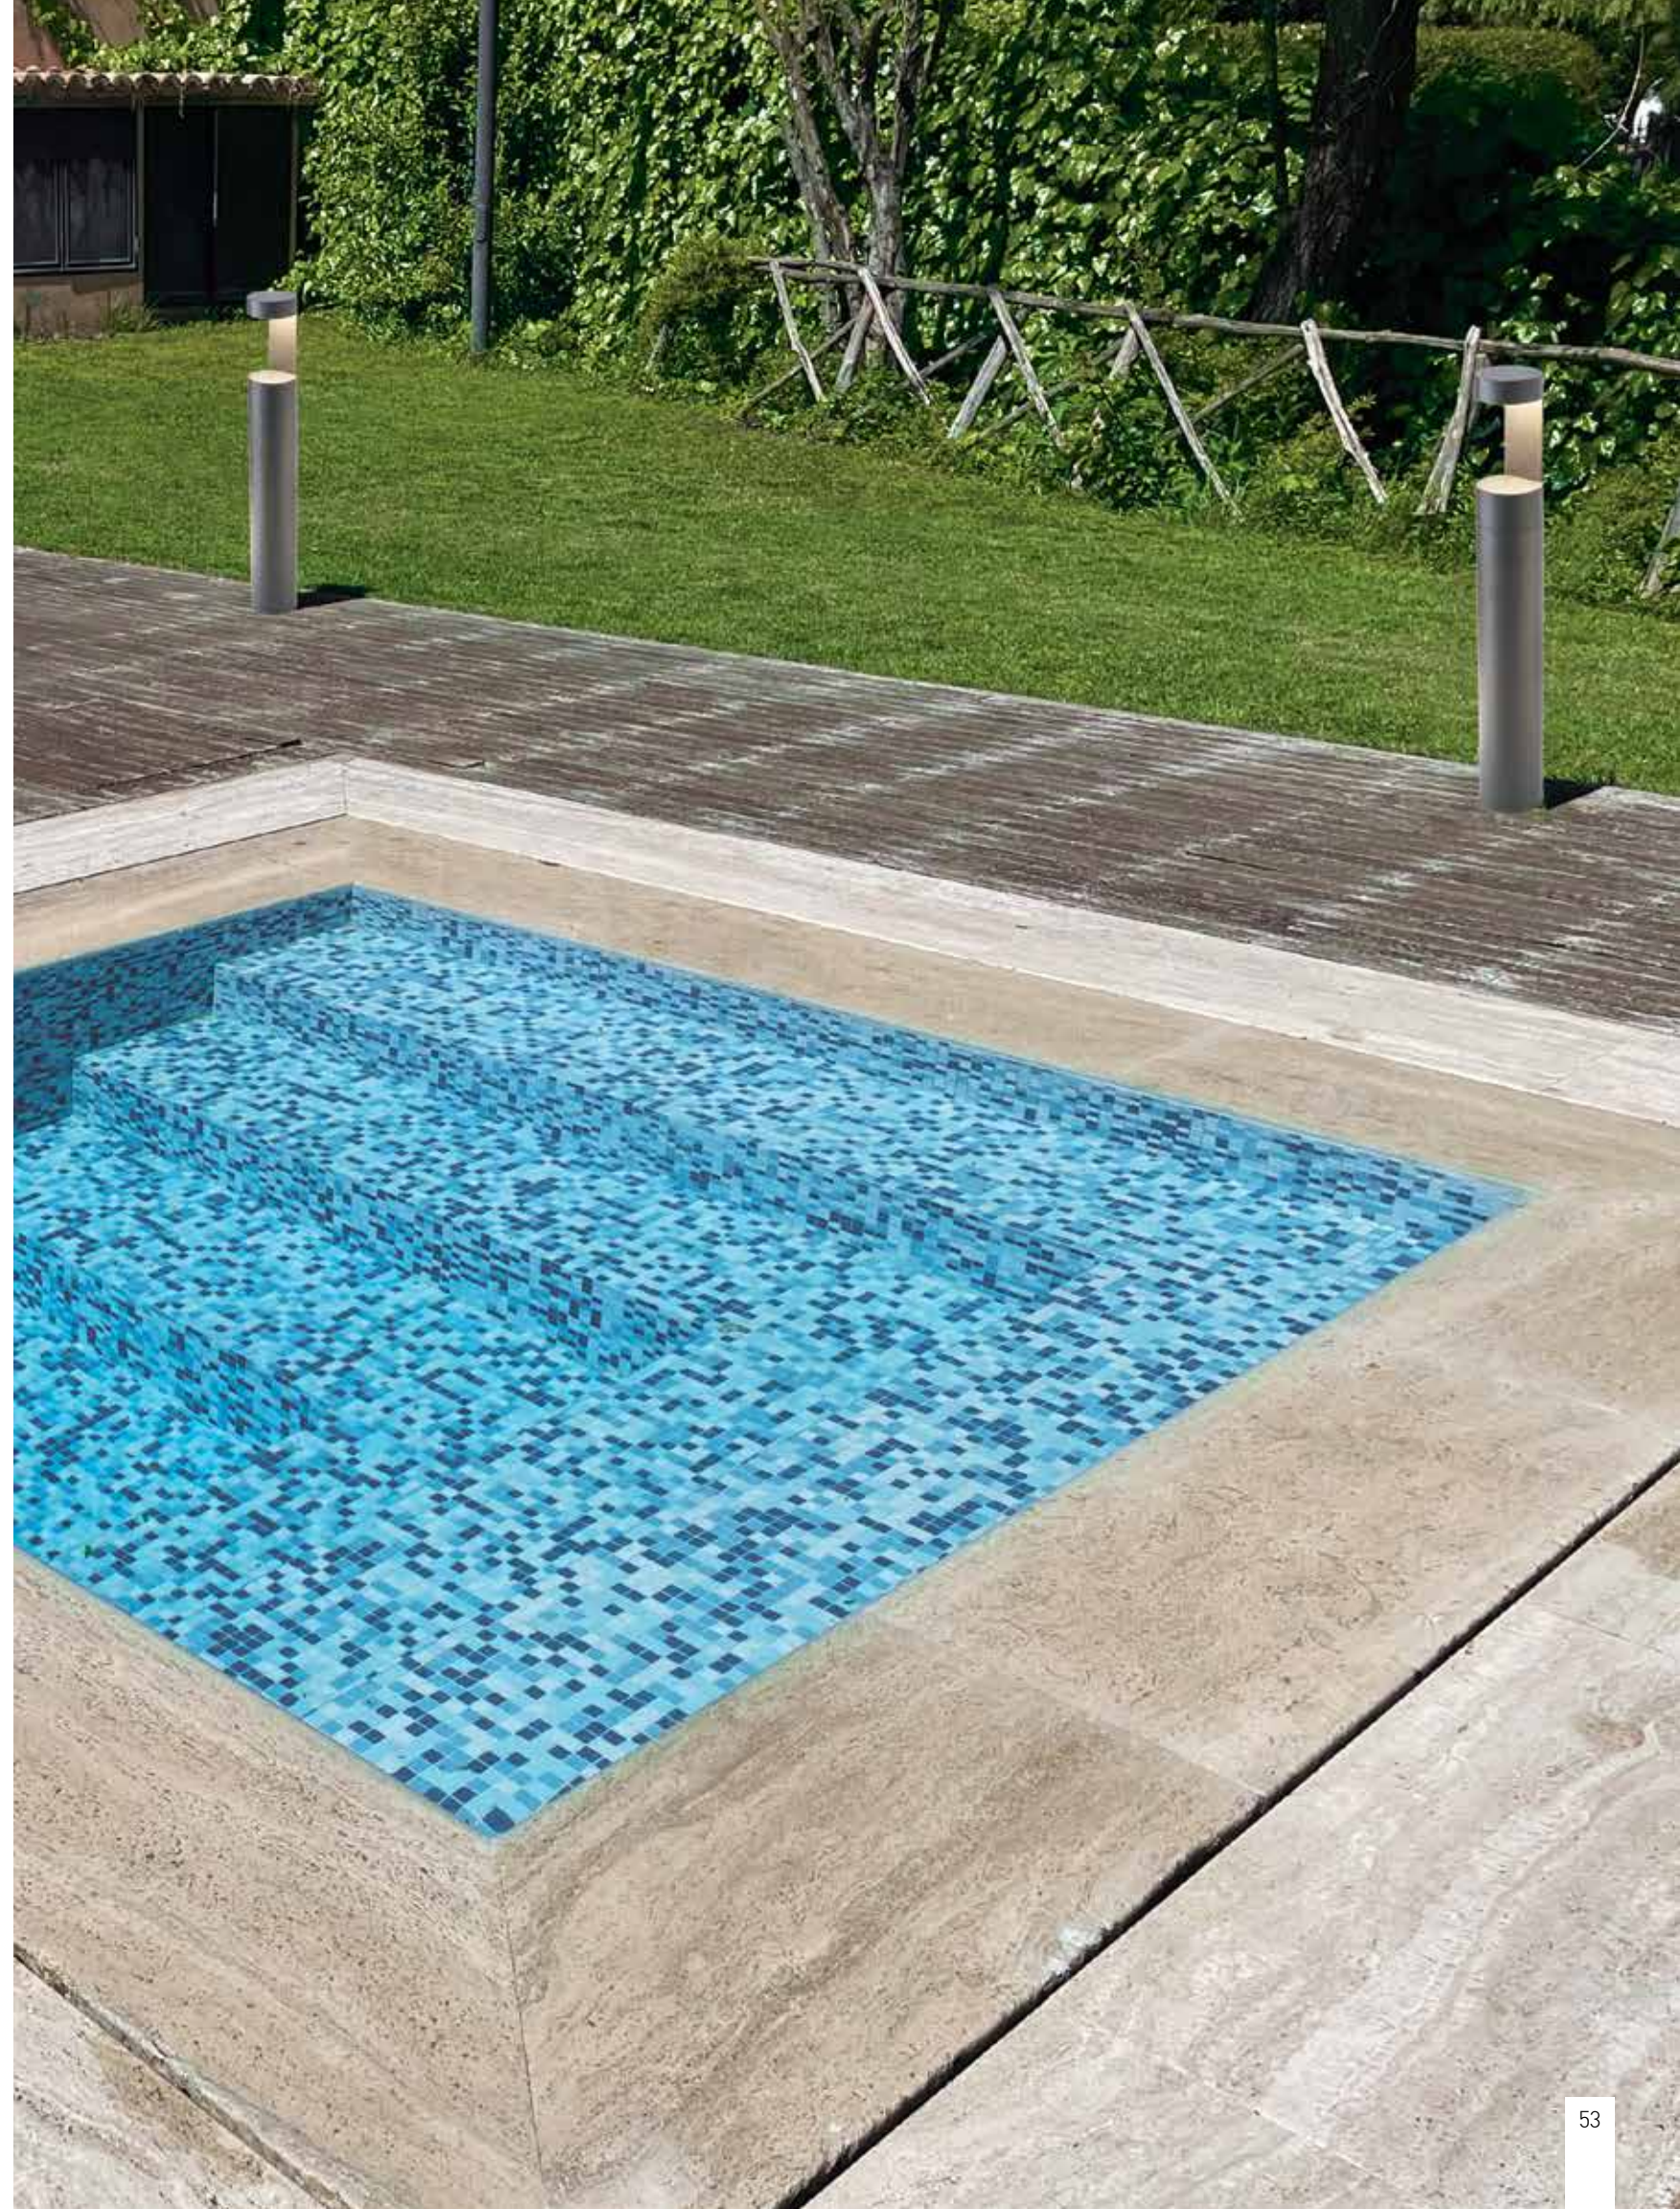

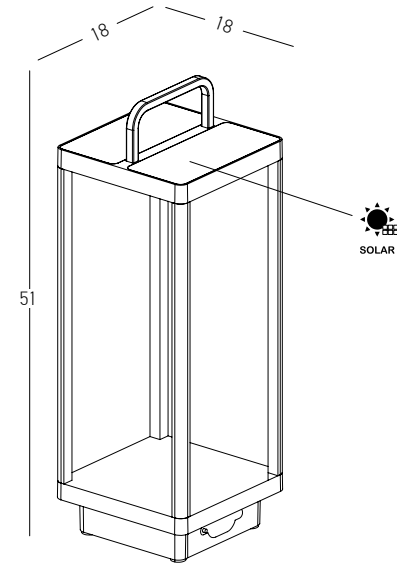


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 390Lm
 Cri 80
 IP 54
 Dimensions L: 18cm W: 18cm H: 51
 Switch 1 Switch On/Off
 Material Aluminium - Tempered Glass
 Special Feature Solar Panel
 Portable Lamp
 USB Cable Included
 Color Graphite / **Code E302**



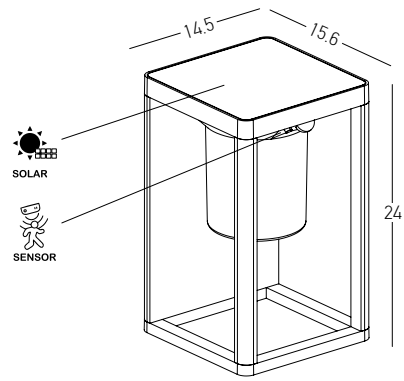


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 210Lm
 Cri 80
 IP 65
 Dimensions L: 15.6cm W: 14.5cm H: 24cm
 Material Aluminium - PC Diffuser
 Special Feature Solar Panel
 3 Different Ways of Lighting
 Sense Distance 3 - 5m
 Color Graphite / **Code E295**







Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 867Lm
 Cri 80
 IP 54
 Dimensions Ø: 11cm H: 25cm
 Material Aluminium
 Color Graphite / **Code E133**

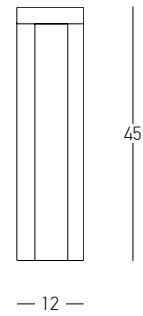


Power 3x 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1117Lm
 Cri 80
 IP 54
 Dimensions Ø: 12cm H: 45cm
 Material Aluminium
 Color Graphite / **Code E132**

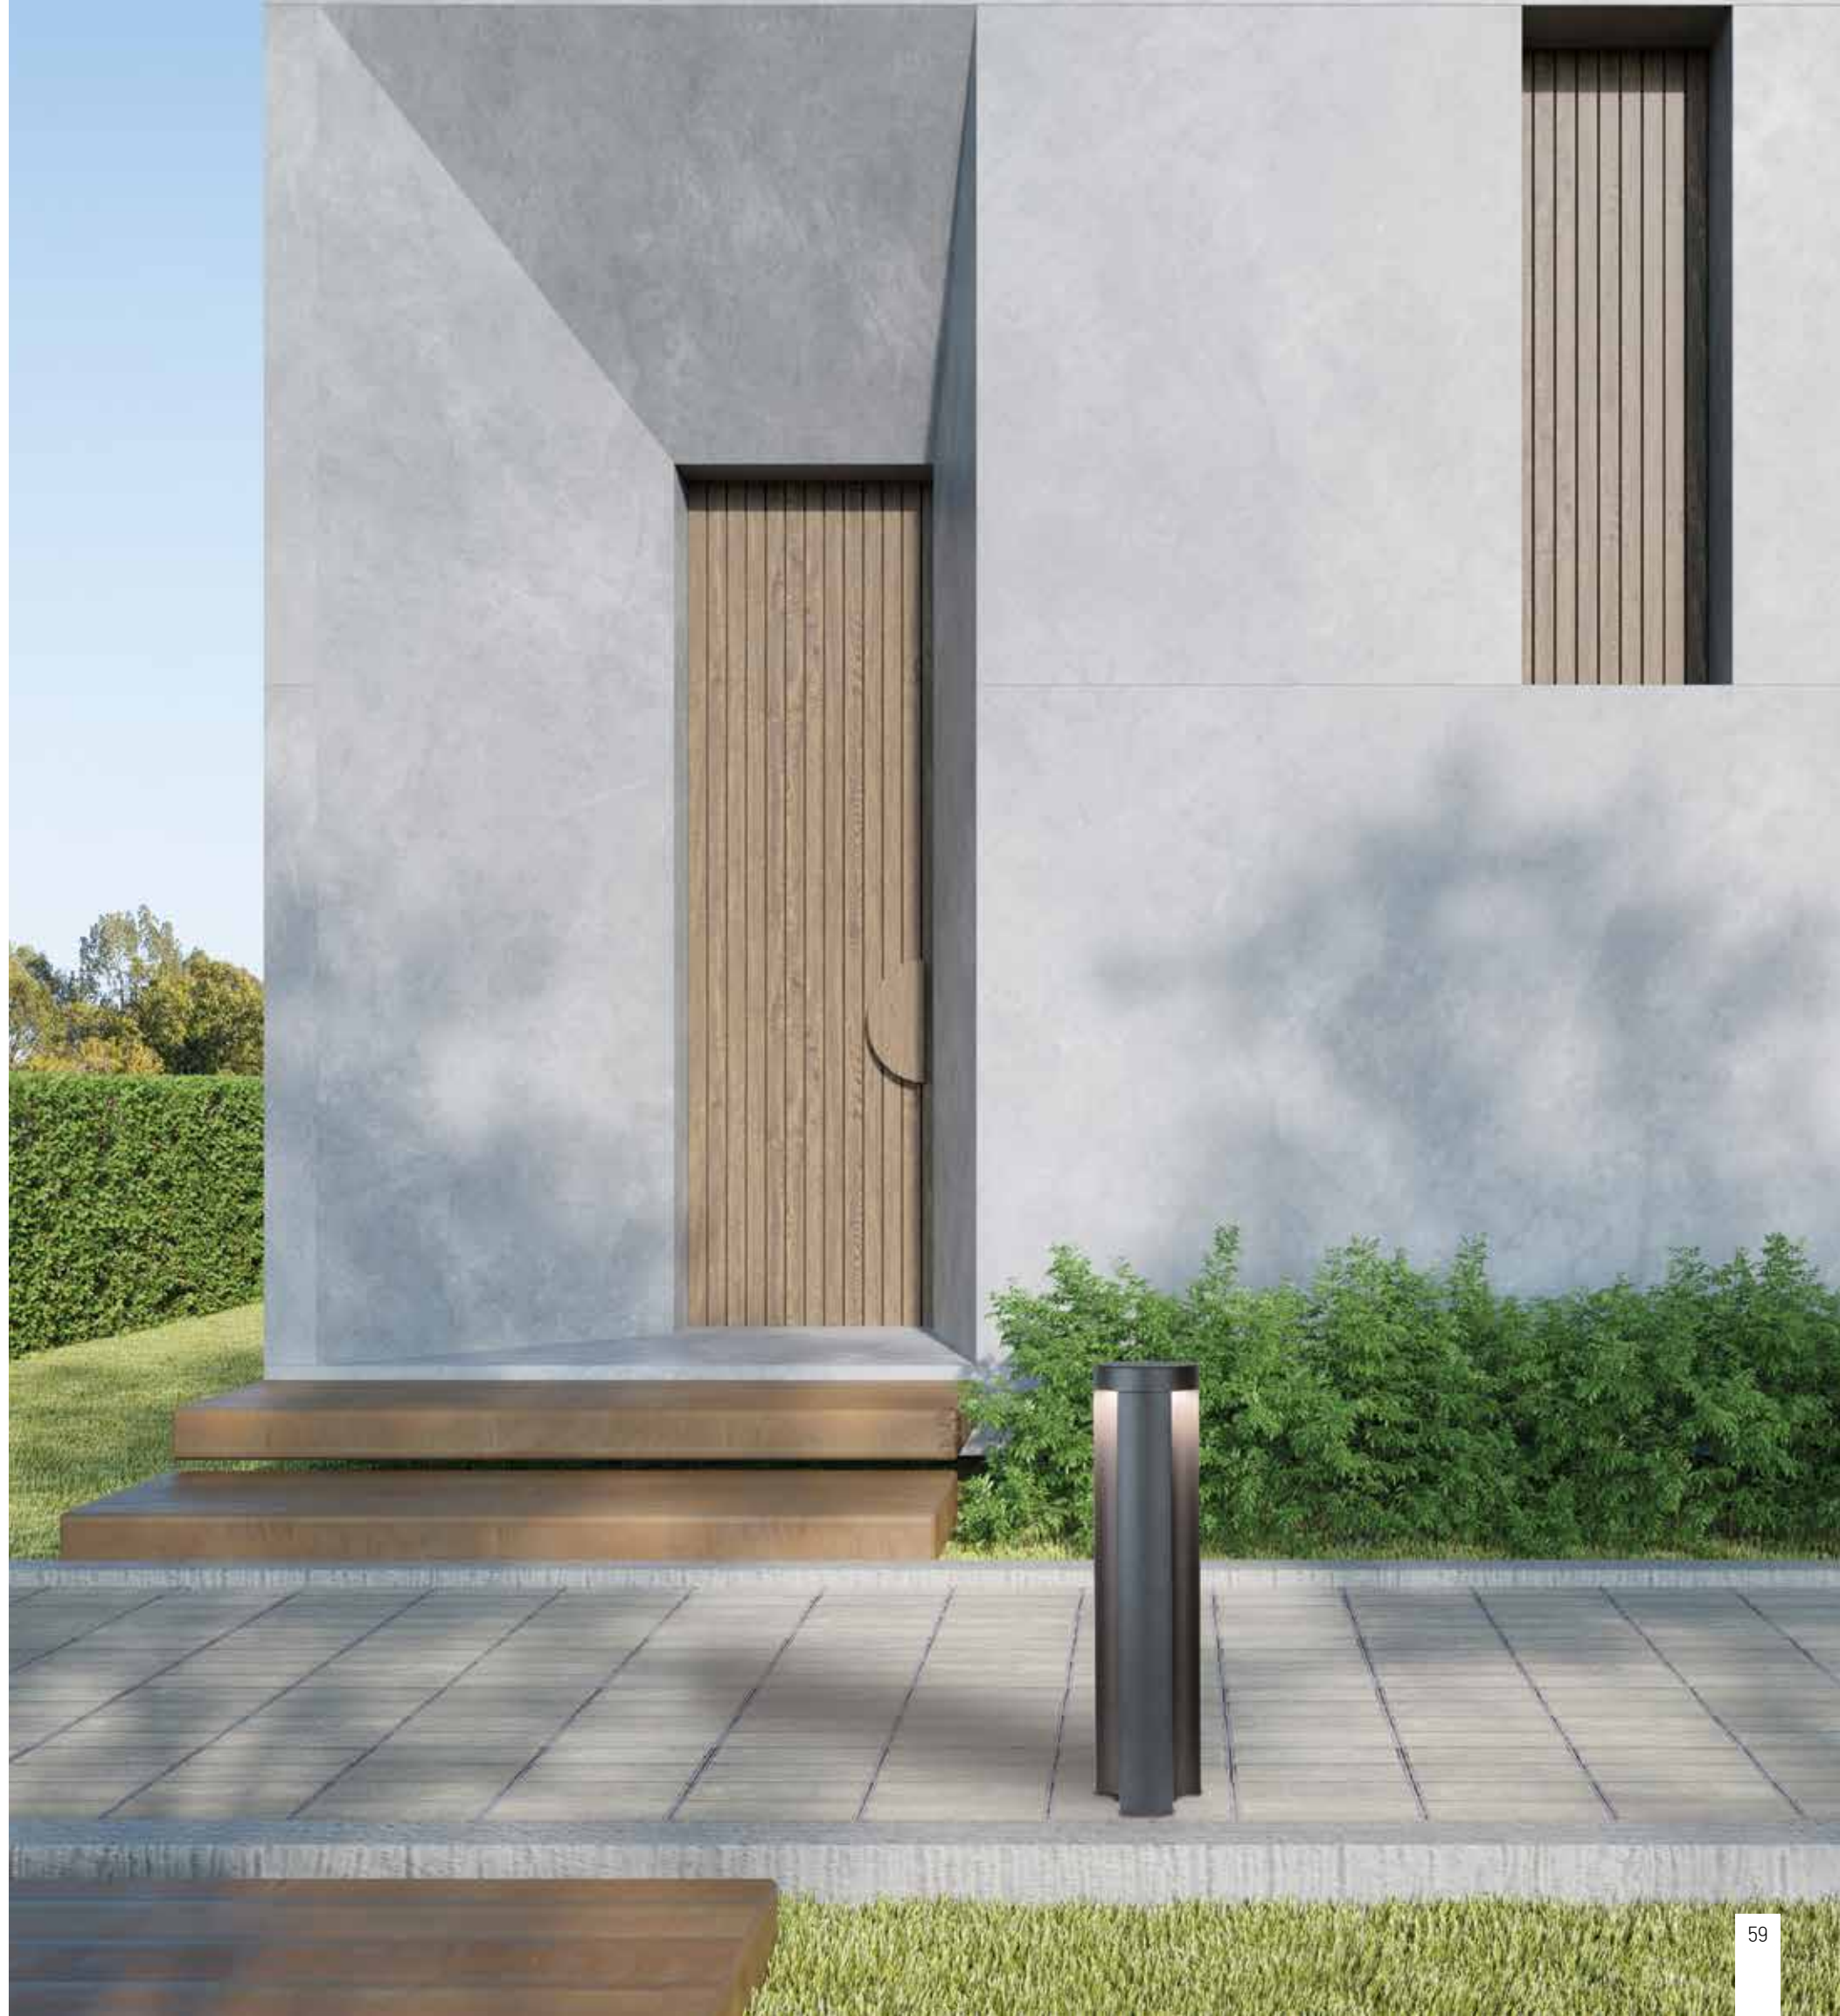

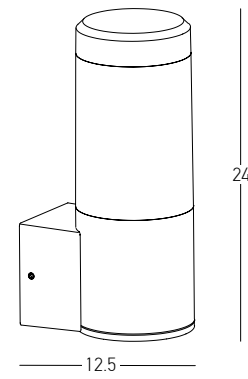


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 990Lm
 Cri 80
 IP 54
 Dimensions L: 12.5cm W: 9cm H: 24cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E276**

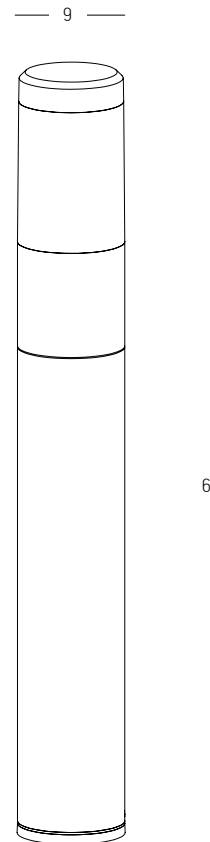


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 993Lm
 Cri 80
 IP 54
 Dimensions Ø: 9cm H: 65cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E277**



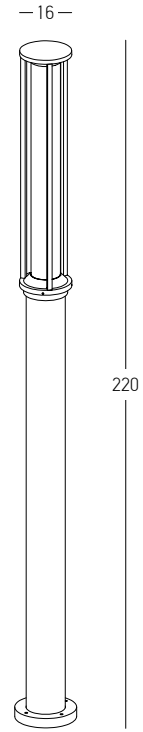


Power 17W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1488Lm
Cri 80
IP 65
Dimensions Ø: 16cm H: 220cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E348**



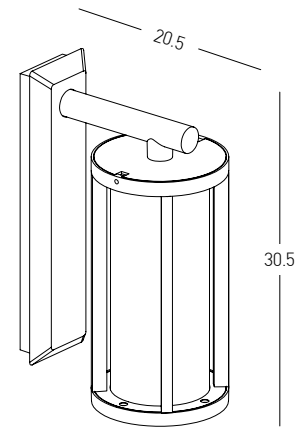


Bulb 1x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 20.5cm W: 12.5cm H: 30.5cm
 Base L: 3cm W: 7.5cm H: 28.5cm
 Shade Dimensions Ø: 12.5cm H: 24cm
 Material Aluminium - Clear Diffuser
 Color Sandy Black / Code E338


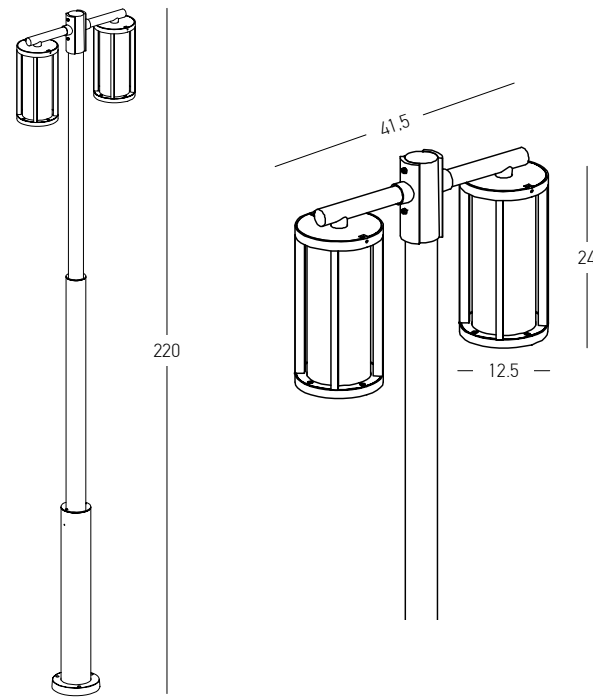


Bulb 2x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 12.5cm W: 41.5cm H: 220cm
 Base Ø: 14.5cm H: 3cm
 Shade Dimensions Ø: 12.5cm H: 24cm
 Material Aluminium - Clear Diffuser
 Color Sandy Black / Code E339



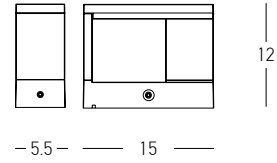


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 700Lm
 Cri 80
 IP 54
 Dimensions L: 12cm W: 15cm H: 5.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E207**

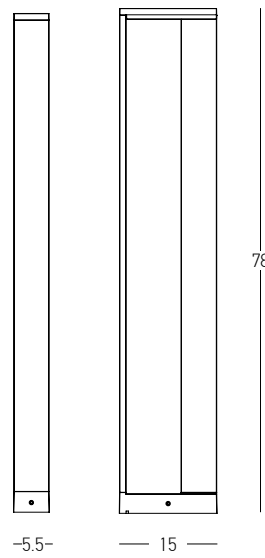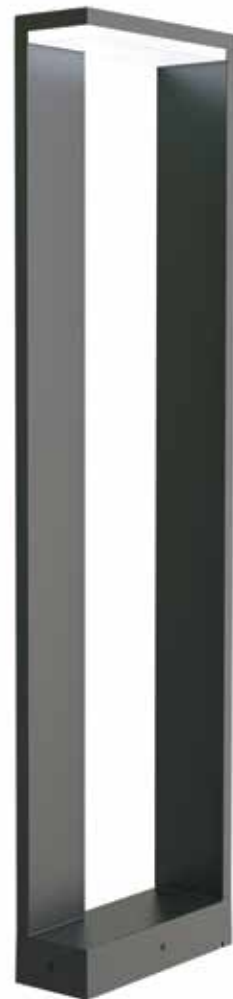


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 653Lm
 Cri 80
 IP 54
 Dimensions L: 15cm W: 5.5cm H: 78cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E208**






Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 785Lm
 Cri 80
 IP 54
 Dimensions L: 19.5cm W: 6cm H: 20.7cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E205**

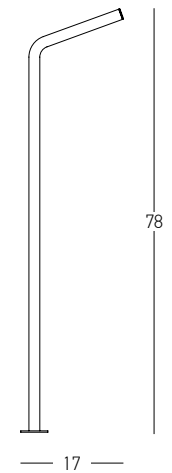


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 785Lm
 Cri 80
 IP 54
 Dimensions L: 17cm W: 6cm H: 78cm
 Base W: 10cm L: 10cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E206**




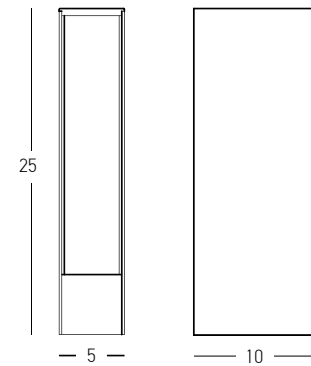


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions L: 5cm W: 10cm H: 25
 Material Aluminium - PC Diffuser
 Color Rusty Brown / **Code E256**

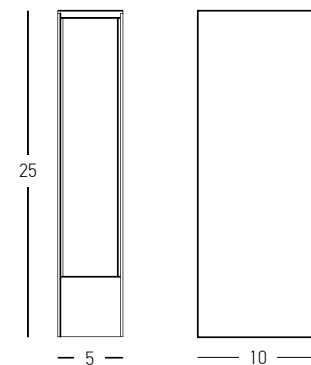


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 720Lm
 Cri 80
 IP 65
 Dimensions L: 5cm W: 10cm H: 25
 Material Aluminium - PC Diffuser
 Special Feature Double Side Lighting
 Color Graphite / **Code E257**

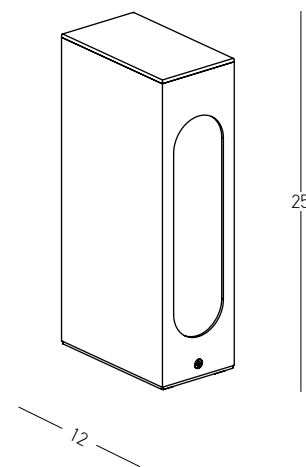


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 54
 Dimensions L: 12cm W: 7cm H: 25cm
 Material Aluminium
 Color Graphite / **Code E211**

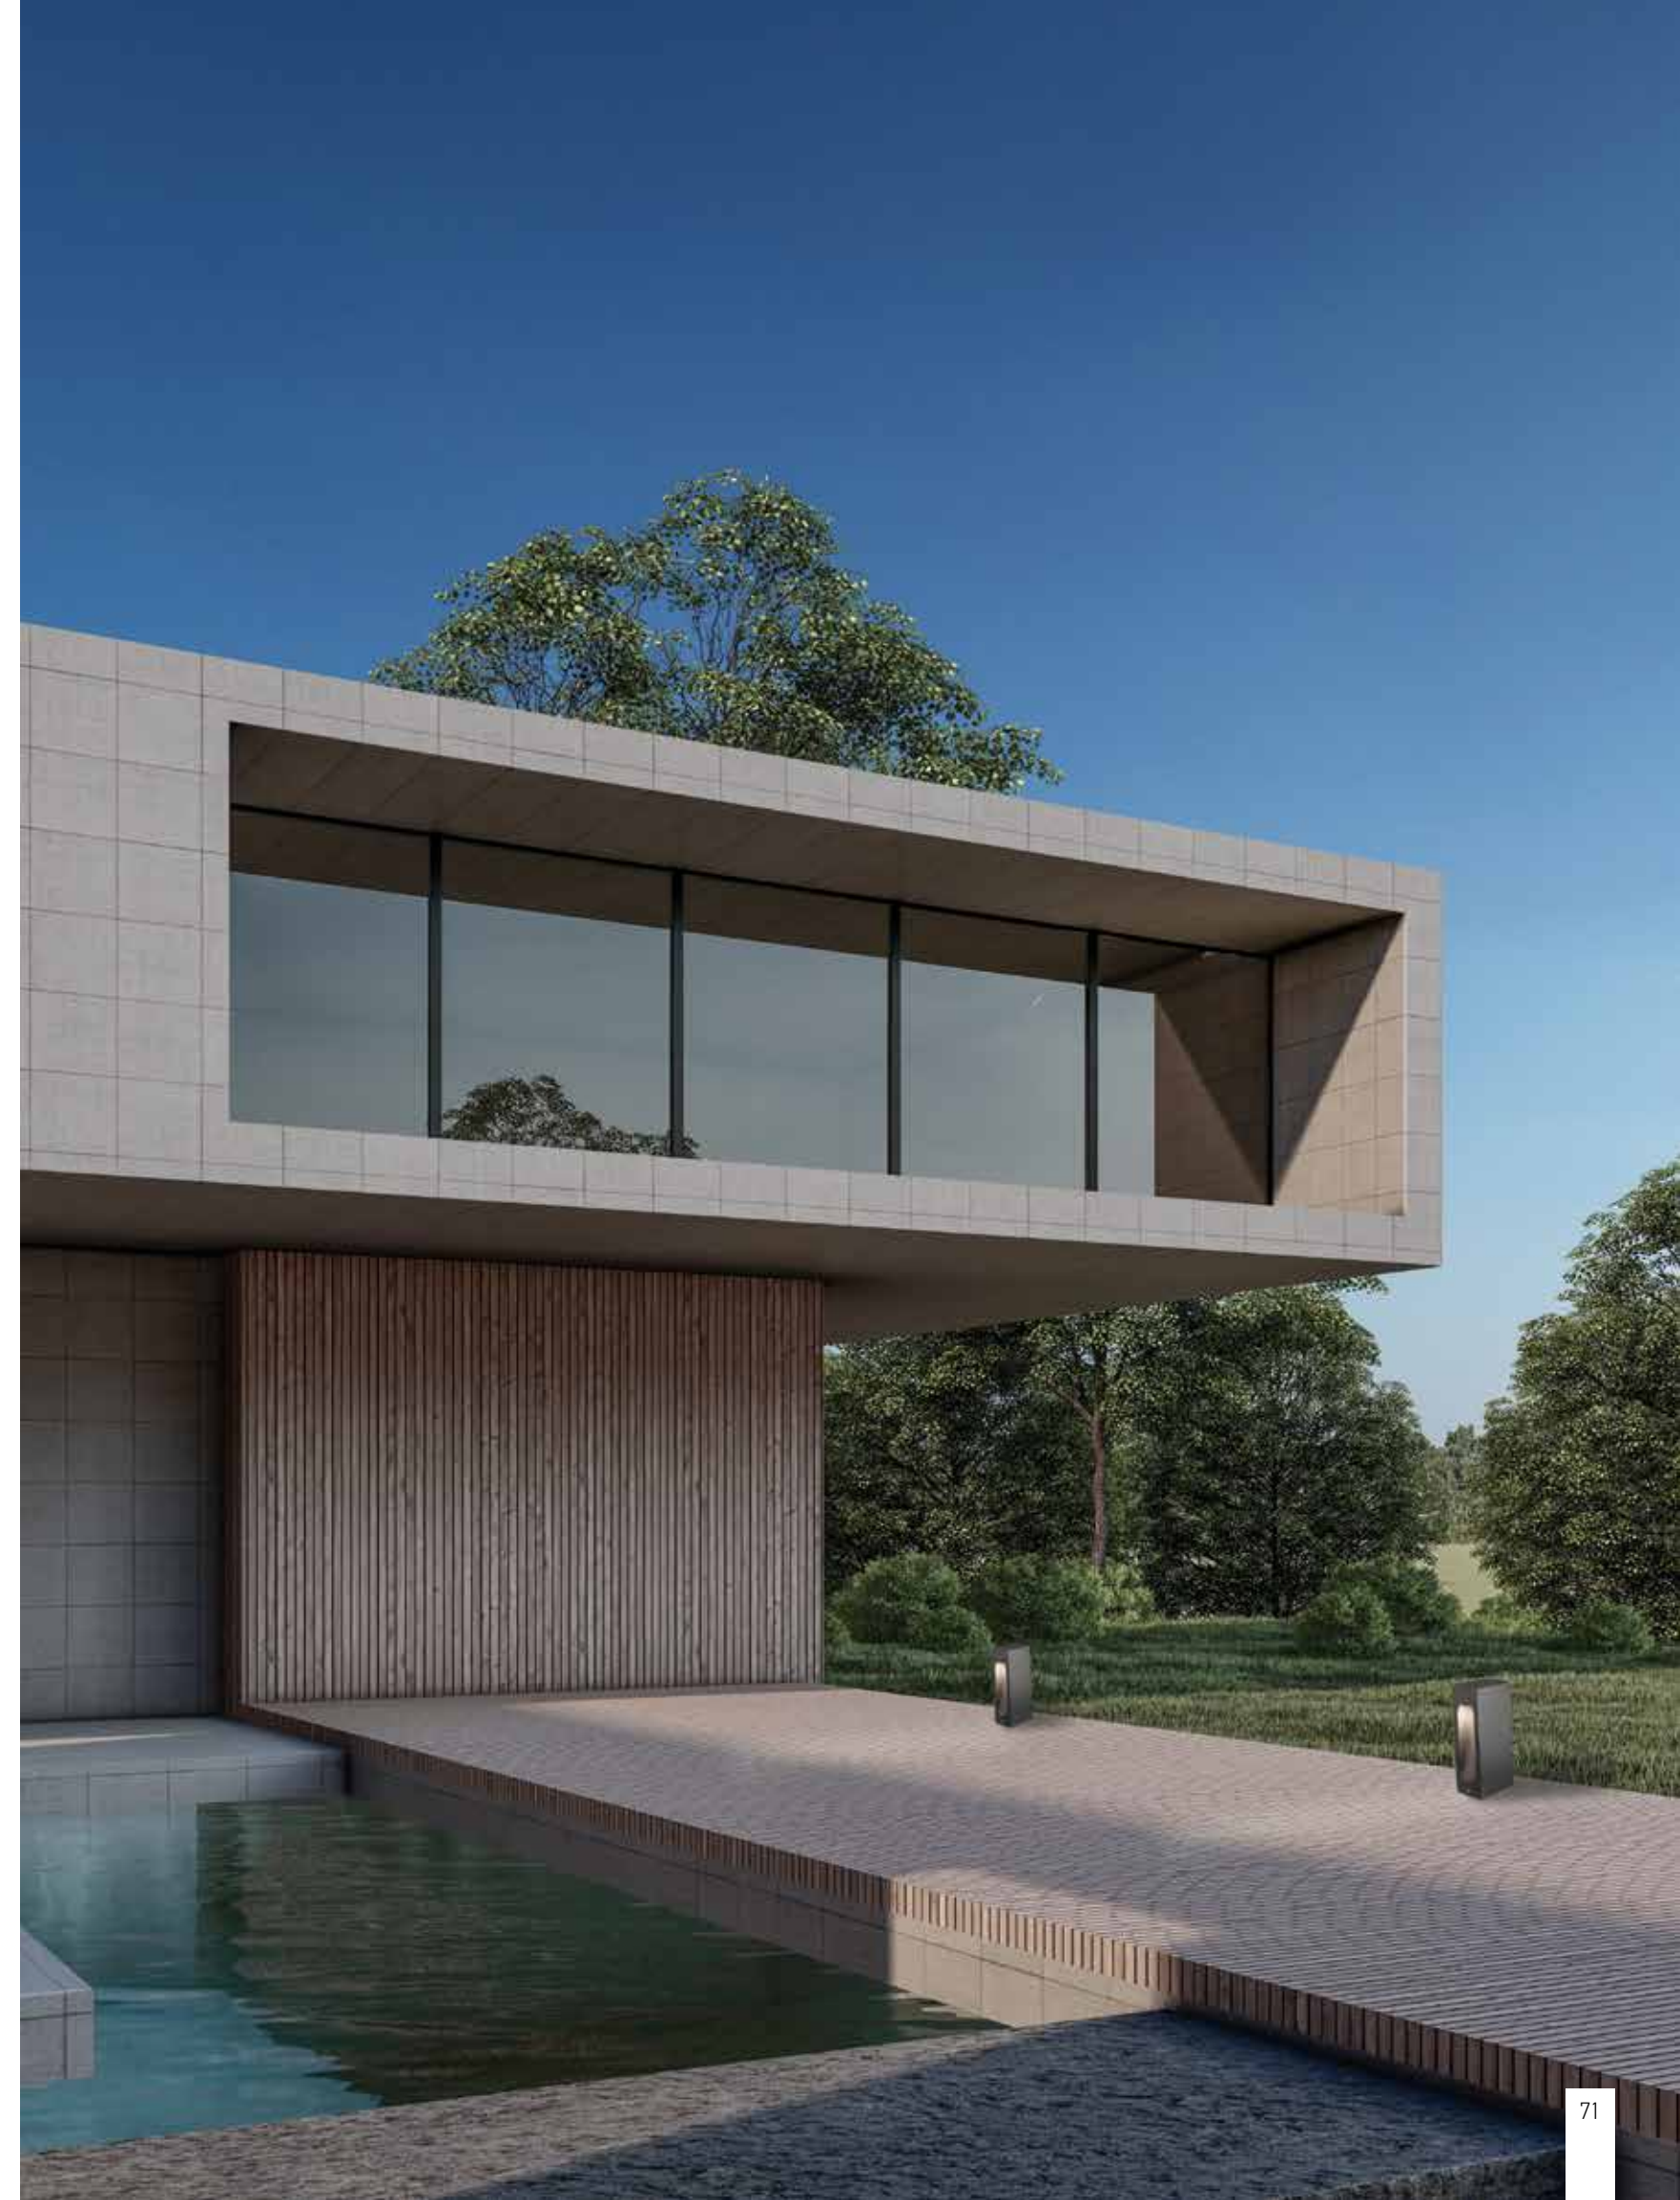

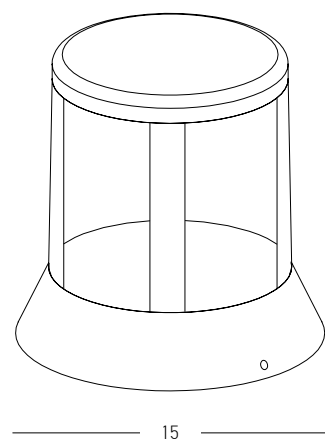

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 557Lm
Cri 80
IP 65
Dimensions Ø: 15cm H: 15cm
Material Aluminium - Clear Diffuser
Color Graphite / **Code E337**




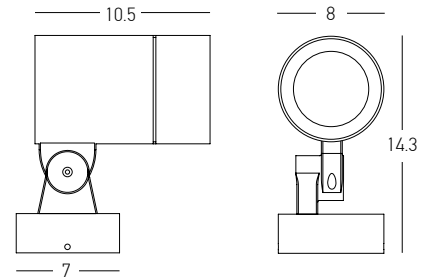

Bulb 1x GU10
 Power 11W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 8cm L: 14.3cm
 Base Ø: 7cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E236**




Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1243Lm
 Cri 80
 IP 65
 Dimensions Ø: 8cm L: 16.2cm
 Base Ø: 7cm
 Optic 32°
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E235**

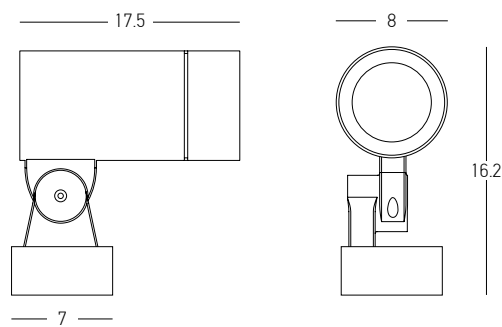

Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1243Lm
 Cri 80
 IP 65
 Dimensions Ø: 8cm L: 16.2cm
 Base Ø: 7cm
 Optic 12°
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E235-12D**



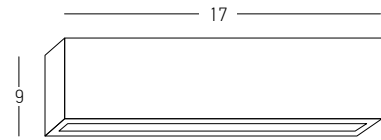

Power 4x 2.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 720Lm
 Cri 80
 IP 54
 Dimensions L: 17cm W: 5.5cm H: 9cm
 Optic 38°
 Material Aluminium - Tempered Glass
 Color Dark Grey / **Code E250**



Power 4x 2.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 720Lm
 Cri 80
 IP 54
 Dimensions L: 17cm W: 5.5cm H: 9cm
 Optic 12°
 Material Aluminium - Tempered Glass
 Color Dark Grey / **Code E250-12D**




Wall / Ground Base
 Material Aluminium
 Color Dark Grey / **Code E251**





WALL | p.078-129




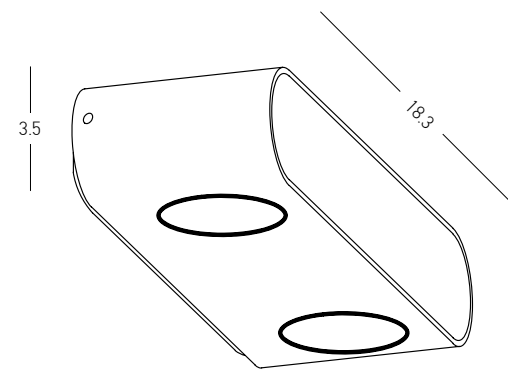

Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 775Lm
 Cri 90
 IP 54
 Dimensions L: 6.5cm W: 18.3cm H: 3.5cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E315**

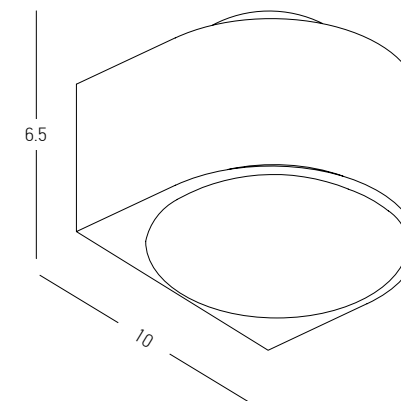


Power 2x 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 929Lm
 Cri 90
 IP 54
 Dimensions L: 11cm W: 10cm H: 6.5cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E317**

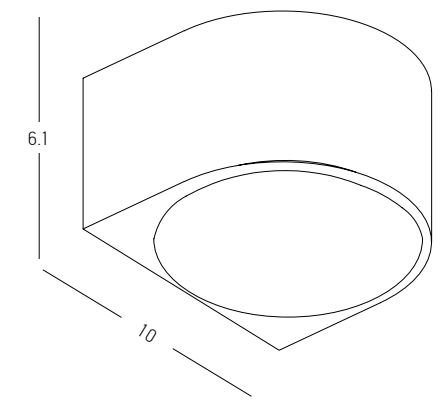



Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 544Lm
 Cri 90
 IP 54
 Dimensions L: 11cm W: 10cm H: 6.1cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E316**



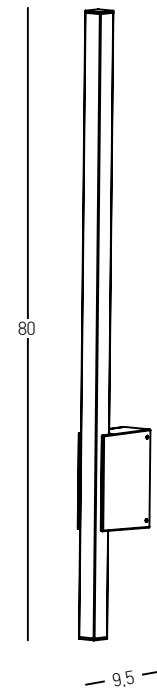


Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1187Lm
Cri 80
IP 65
Dimensions L: 9.5cm W: 4.5cm H: 80cm
Base L: 9cm W: 4.5cm H: 12.5cm
Material Aluminium - PC Diffuser
Color Graphite / Code E287

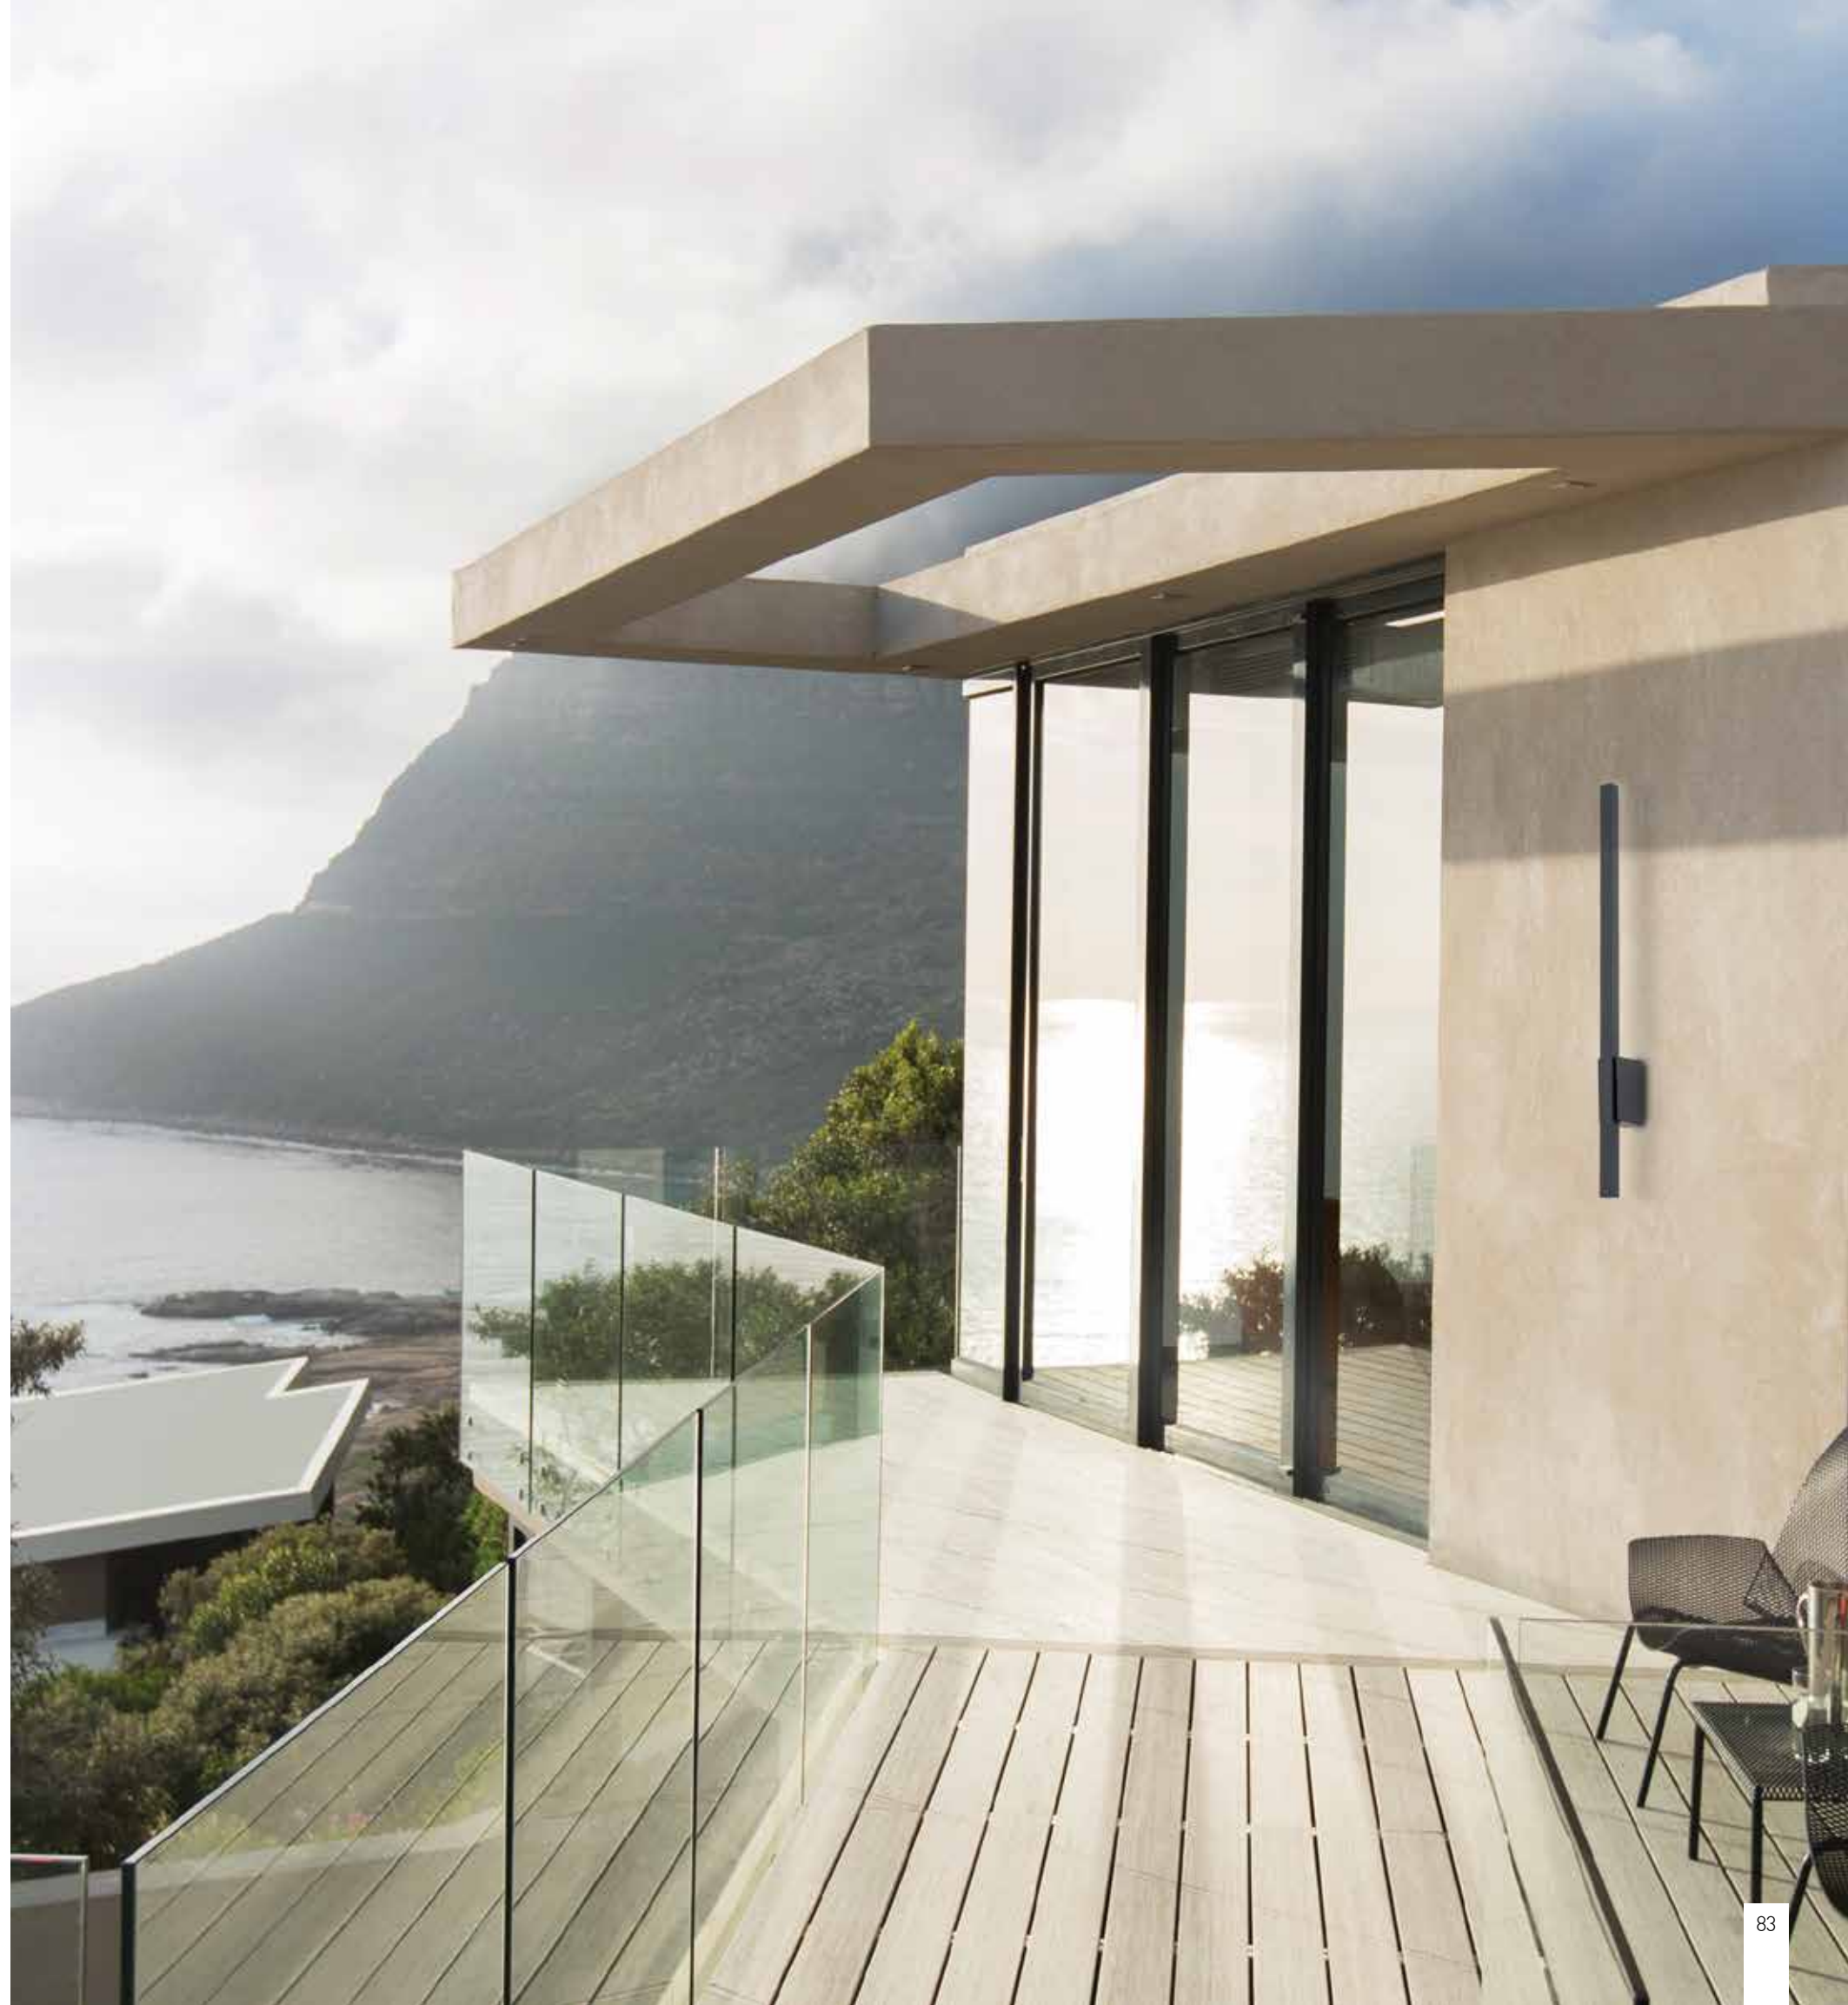

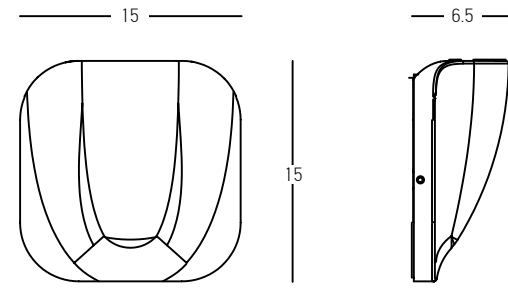


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 572Lm
 Cri 80
 IP 54
 Dimensions L: 6.5cm W: 15cm H: 15cm
 Beam Angle 45°
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E273**

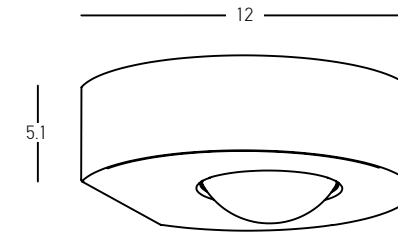


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 752Lm
 Cri 80
 IP 54
 Dimensions L: 12cm W: 13cm H: 5.1cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E278**




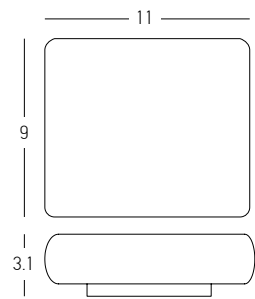


Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions L: 3.1cm W: 11cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E238**

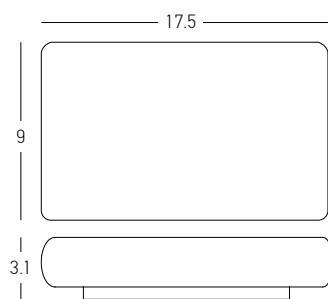


Power 2x 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 960Lm
 Cri 80
 IP 65
 Dimensions L: 3.1cm W: 17.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E239**

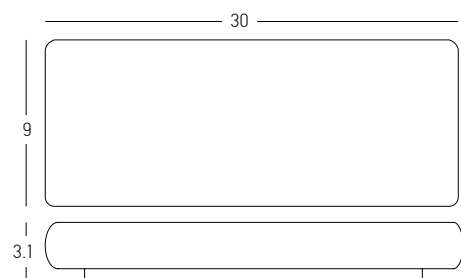


Power 2x 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1600Lm
 Cri 80
 IP 65
 Dimensions L: 3.1cm W: 30cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E240**

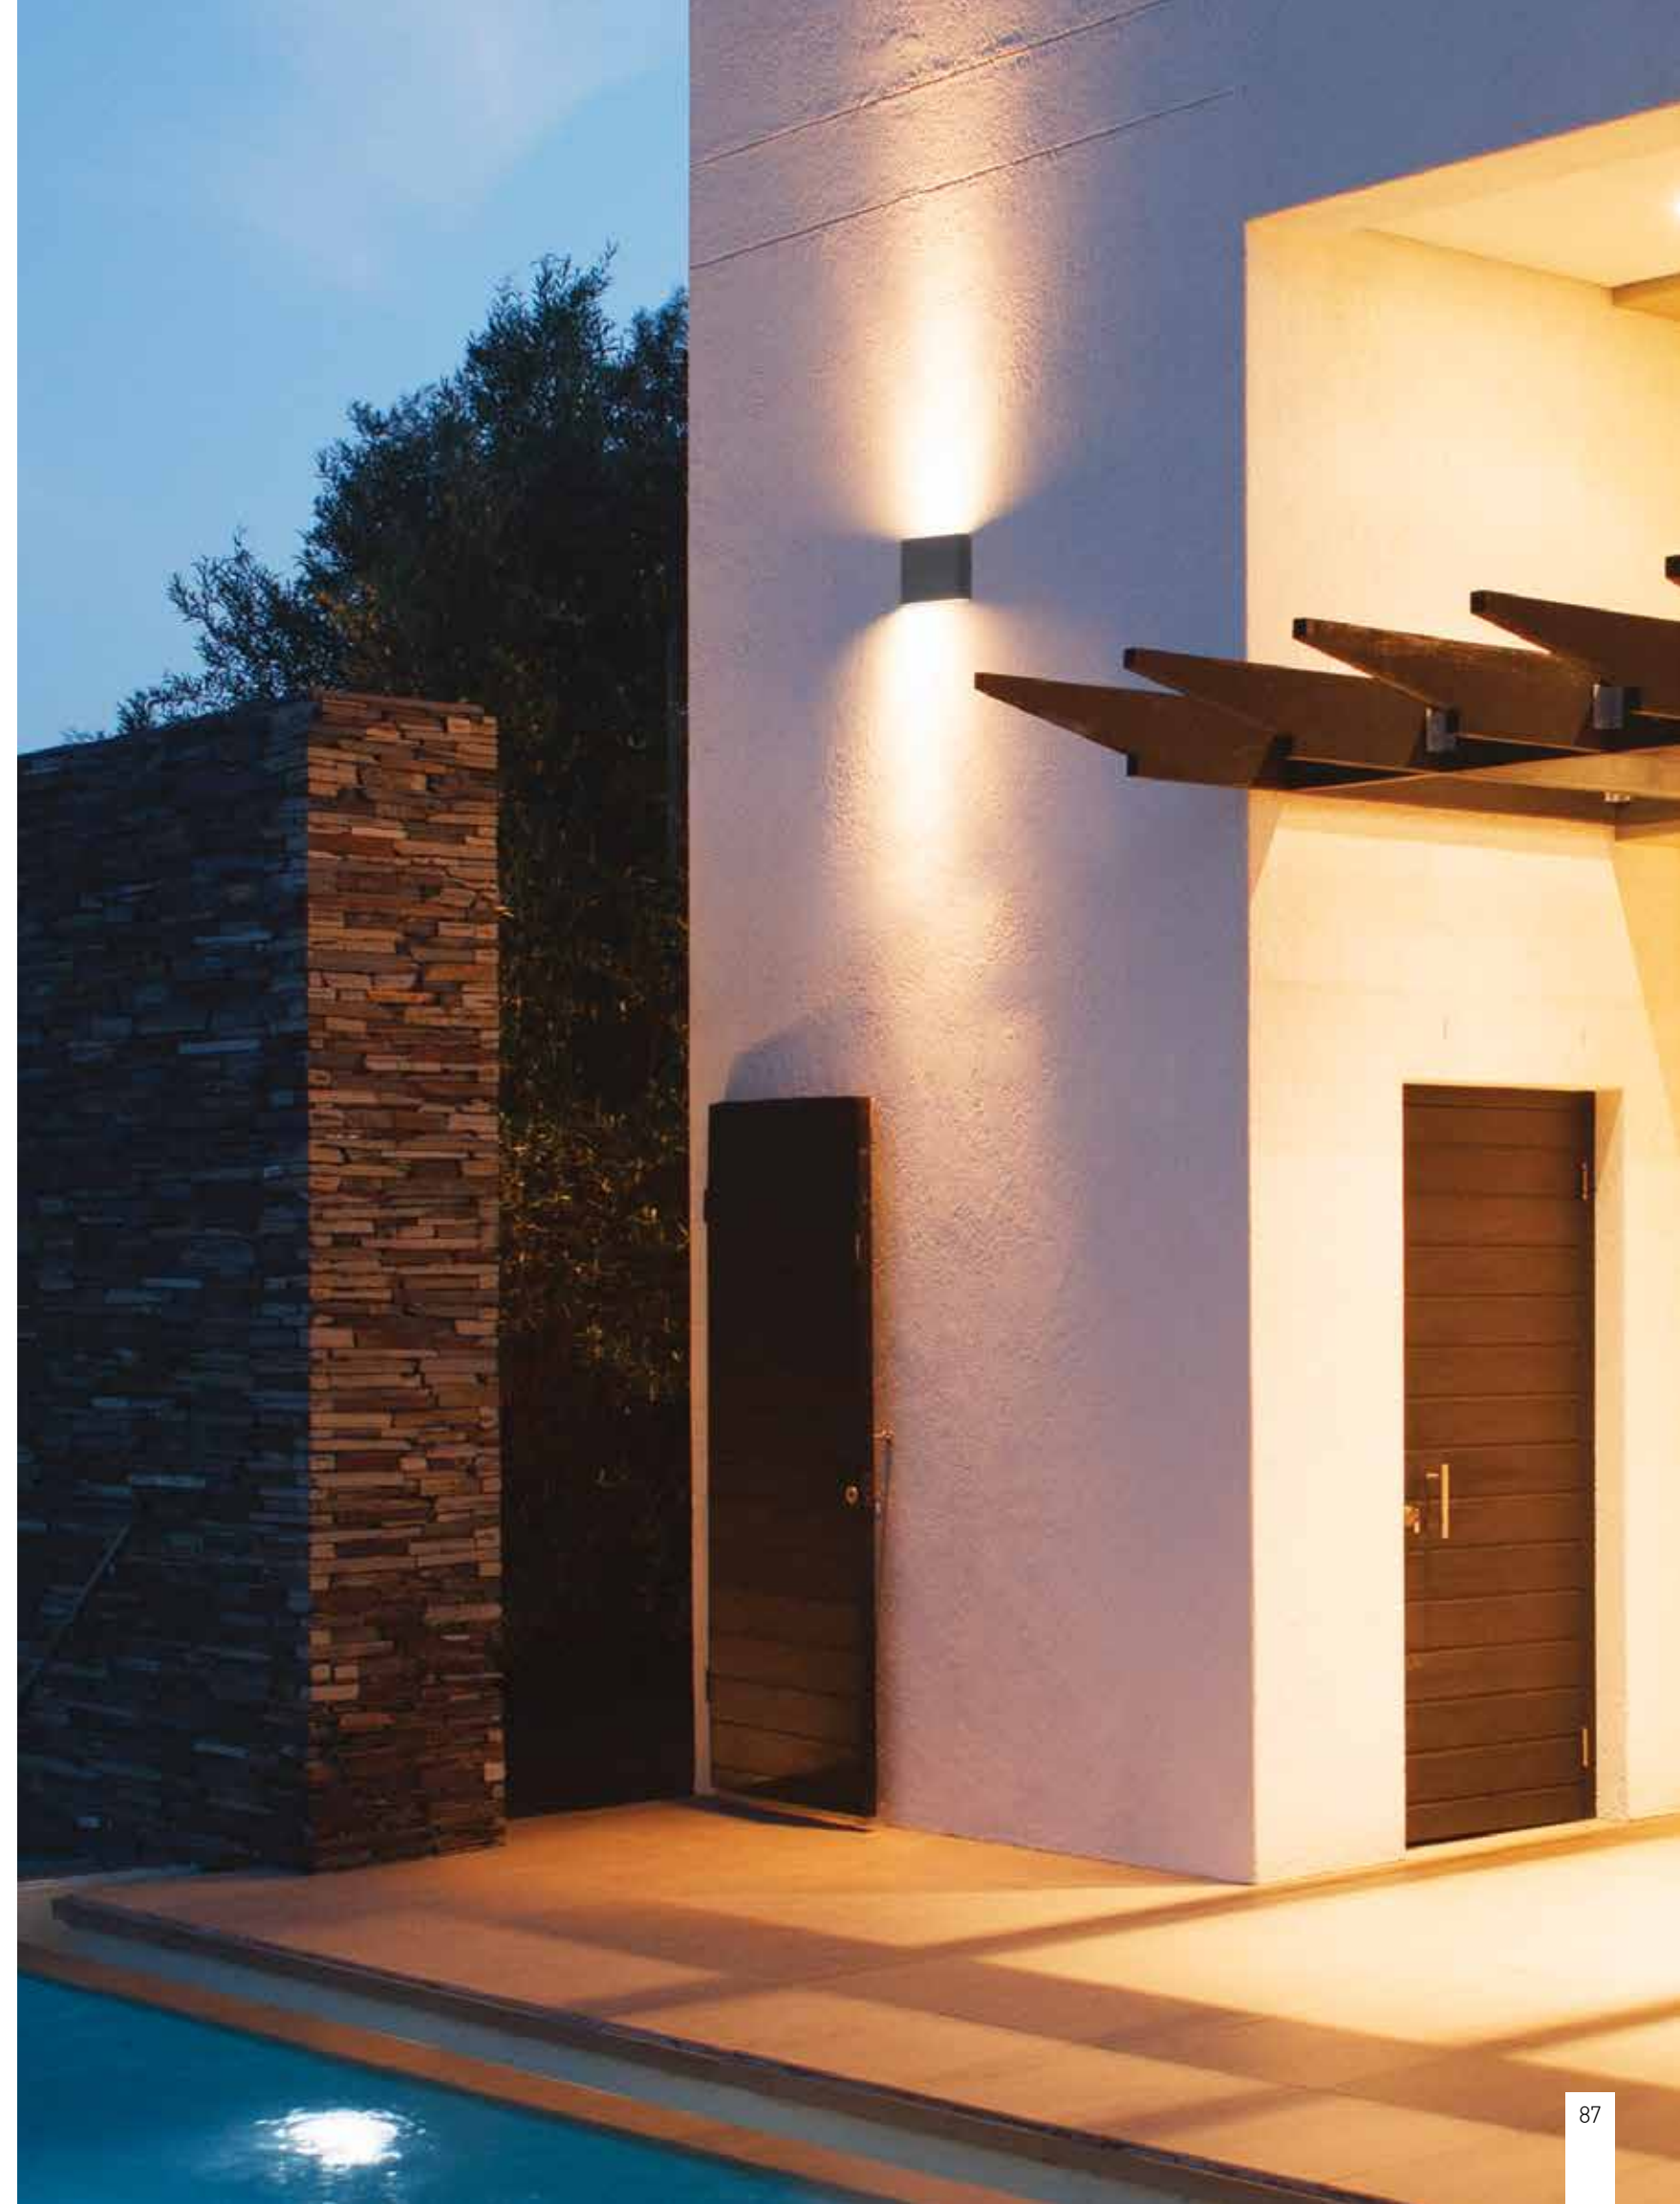

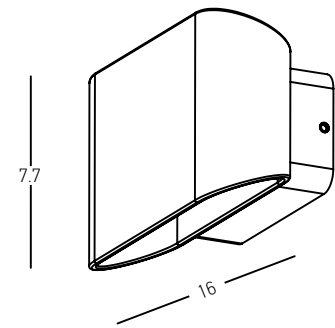


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 900Lm
 Cri 80
 IP 54
 Dimensions L: 10cm W: 16cm H: 7.7cm
 Material Aluminium - PC Diffuser
 Special Feature Up - Down Lighting
 Color Graphite / **Code E274**



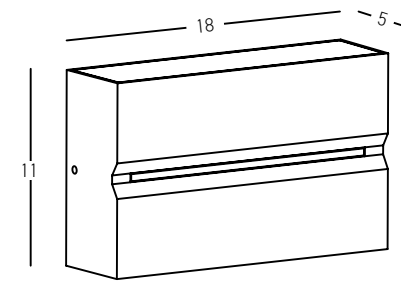


Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 796Lm
 Cri 80
 IP 54
 Dimensions L: 5cm W: 18cm H: 11cm
 Beam Angle 30°
 Material Aluminium - Tempered Glass - PC Diffuser
 Special Feature Up - Down Lighting
 12x SMD LED
 Color Graphite / **Code E272**



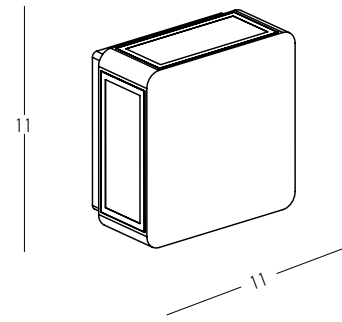


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 336Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 11cm H: 11cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E197**

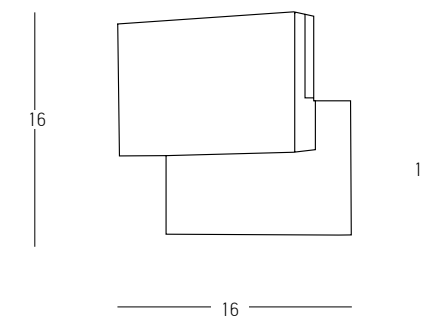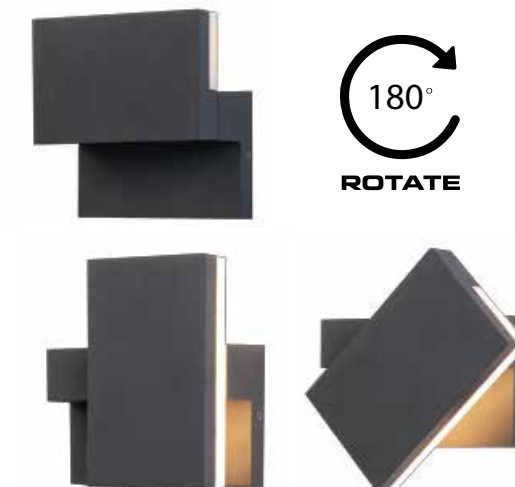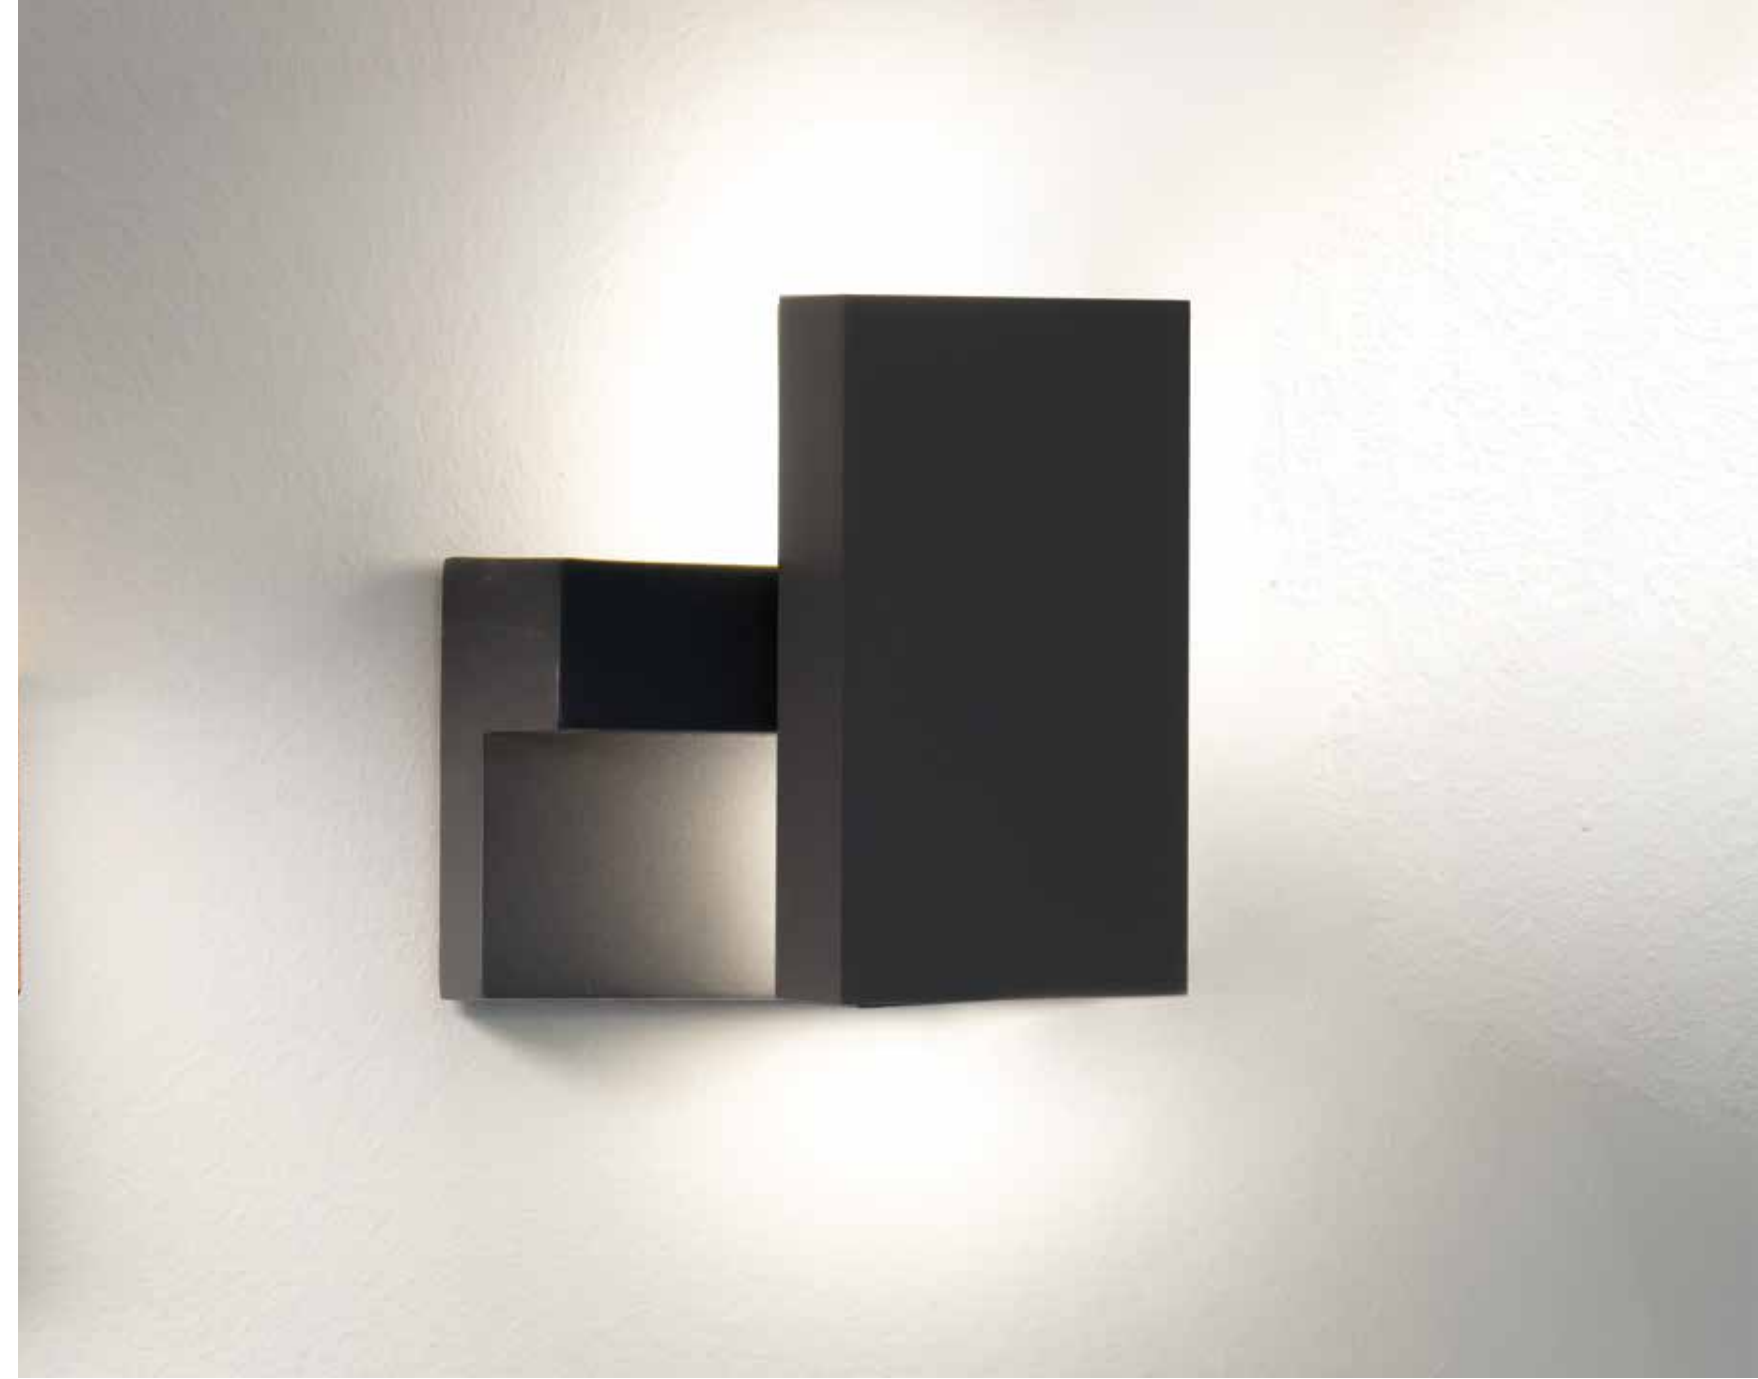


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 810Lm
 Cri 80
 IP 65
 Dimensions L: 7.8cm W: 16cm H: 10-16cm
 Material Aluminium - PC Diffuser
 Special Feature Movable
 Color Graphite / **Code E199**




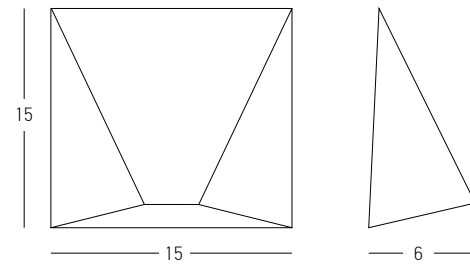


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 54
 Dimensions L: 6cm W: 15cm H: 15cm
 Material Aluminium - Glass
 Color Graphite / **Code E243**

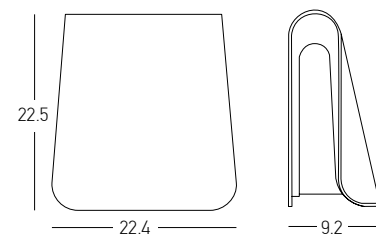


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 54
 Dimensions L: 9.2cm W: 22.4cm H: 22.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E245**

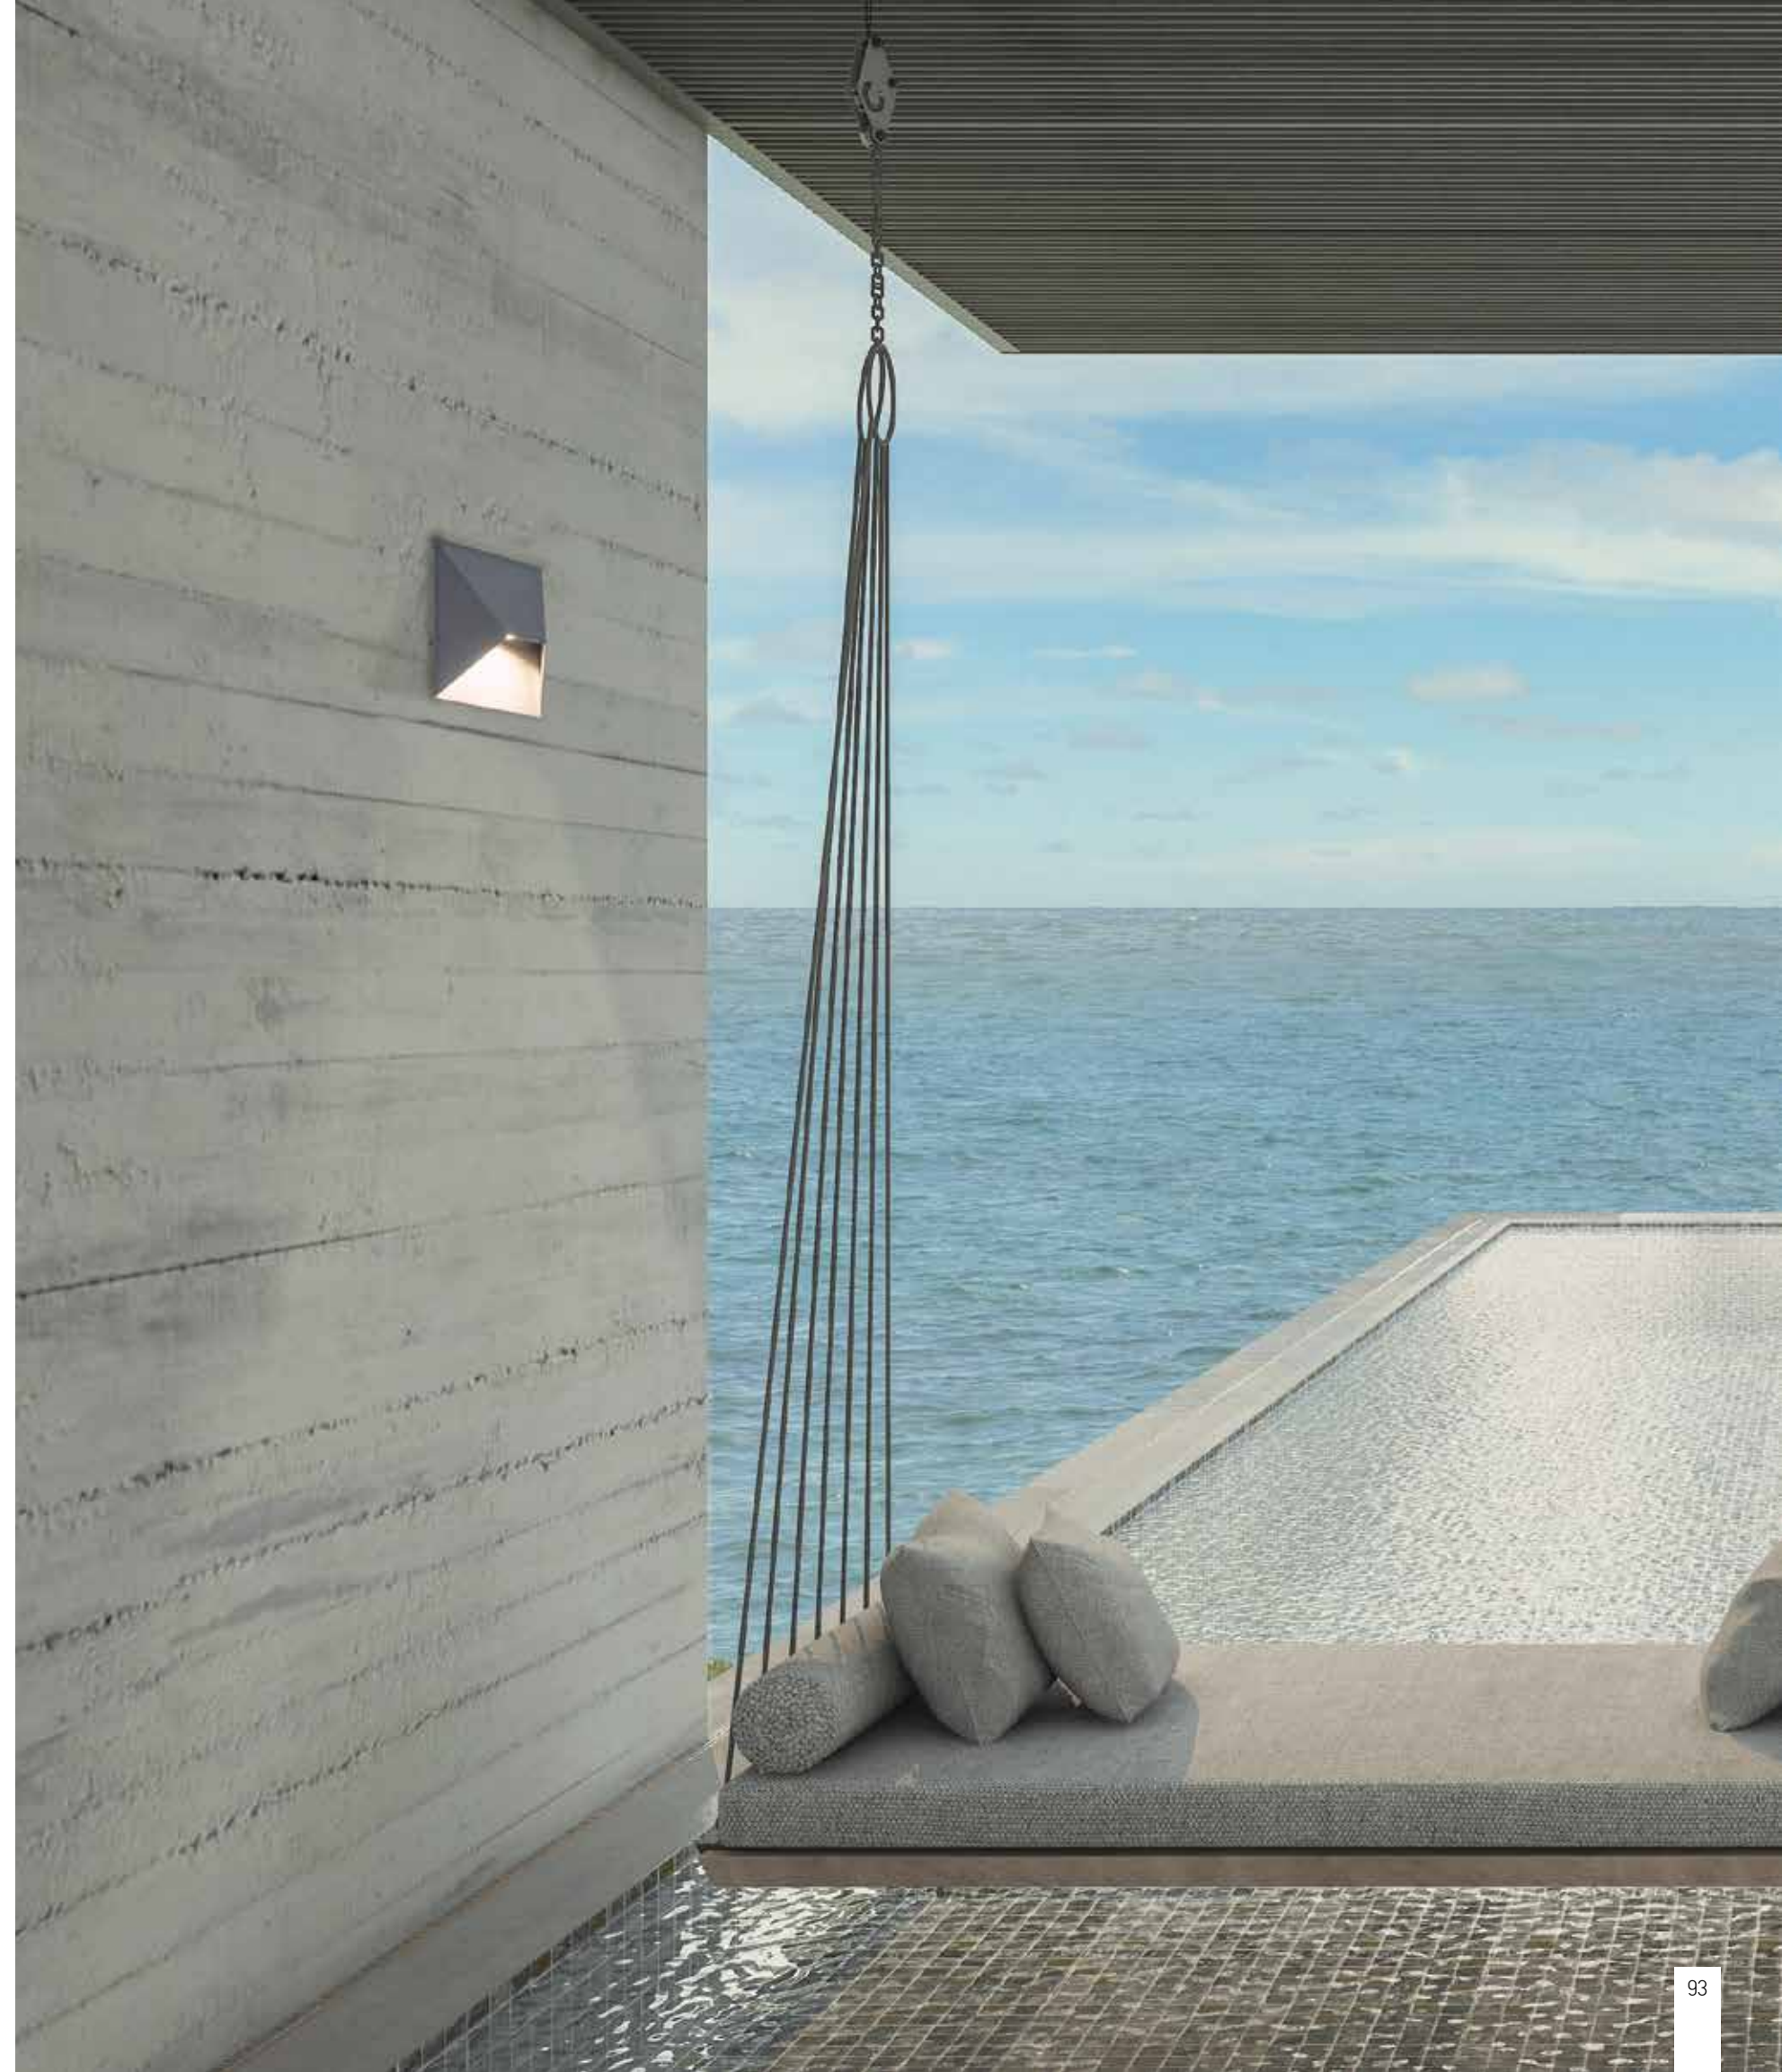

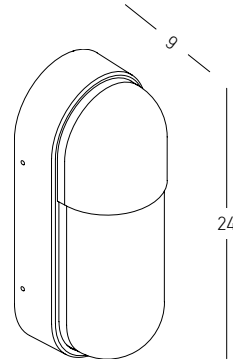


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 498Lm
 Cri 80
 IP 54
 Dimensions L: 9cm W: 9.5cm H: 24cm
 Material Aluminium - PC Diffuser
 Color Black / **Code E318**





Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 540Lm
 Cri 80
 IP 54
 Dimensions L: 11cm W: 13cm H: 14.8cm
 Material Aluminium - PC Diffuser
 Special Feature Up - Down Lighting
 Color Graphite / **Code E114**



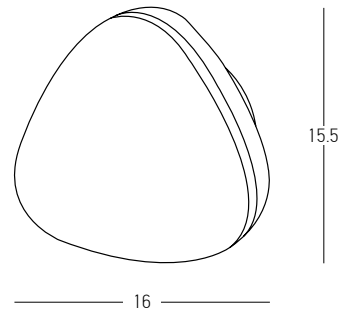


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 810Lm
Cri 80
IP 65
Dimensions L: 7.2cm W: 16cm H: 15.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E195**




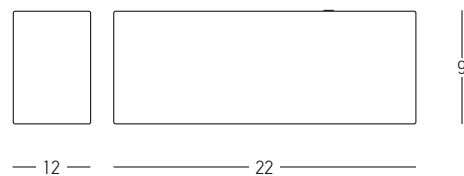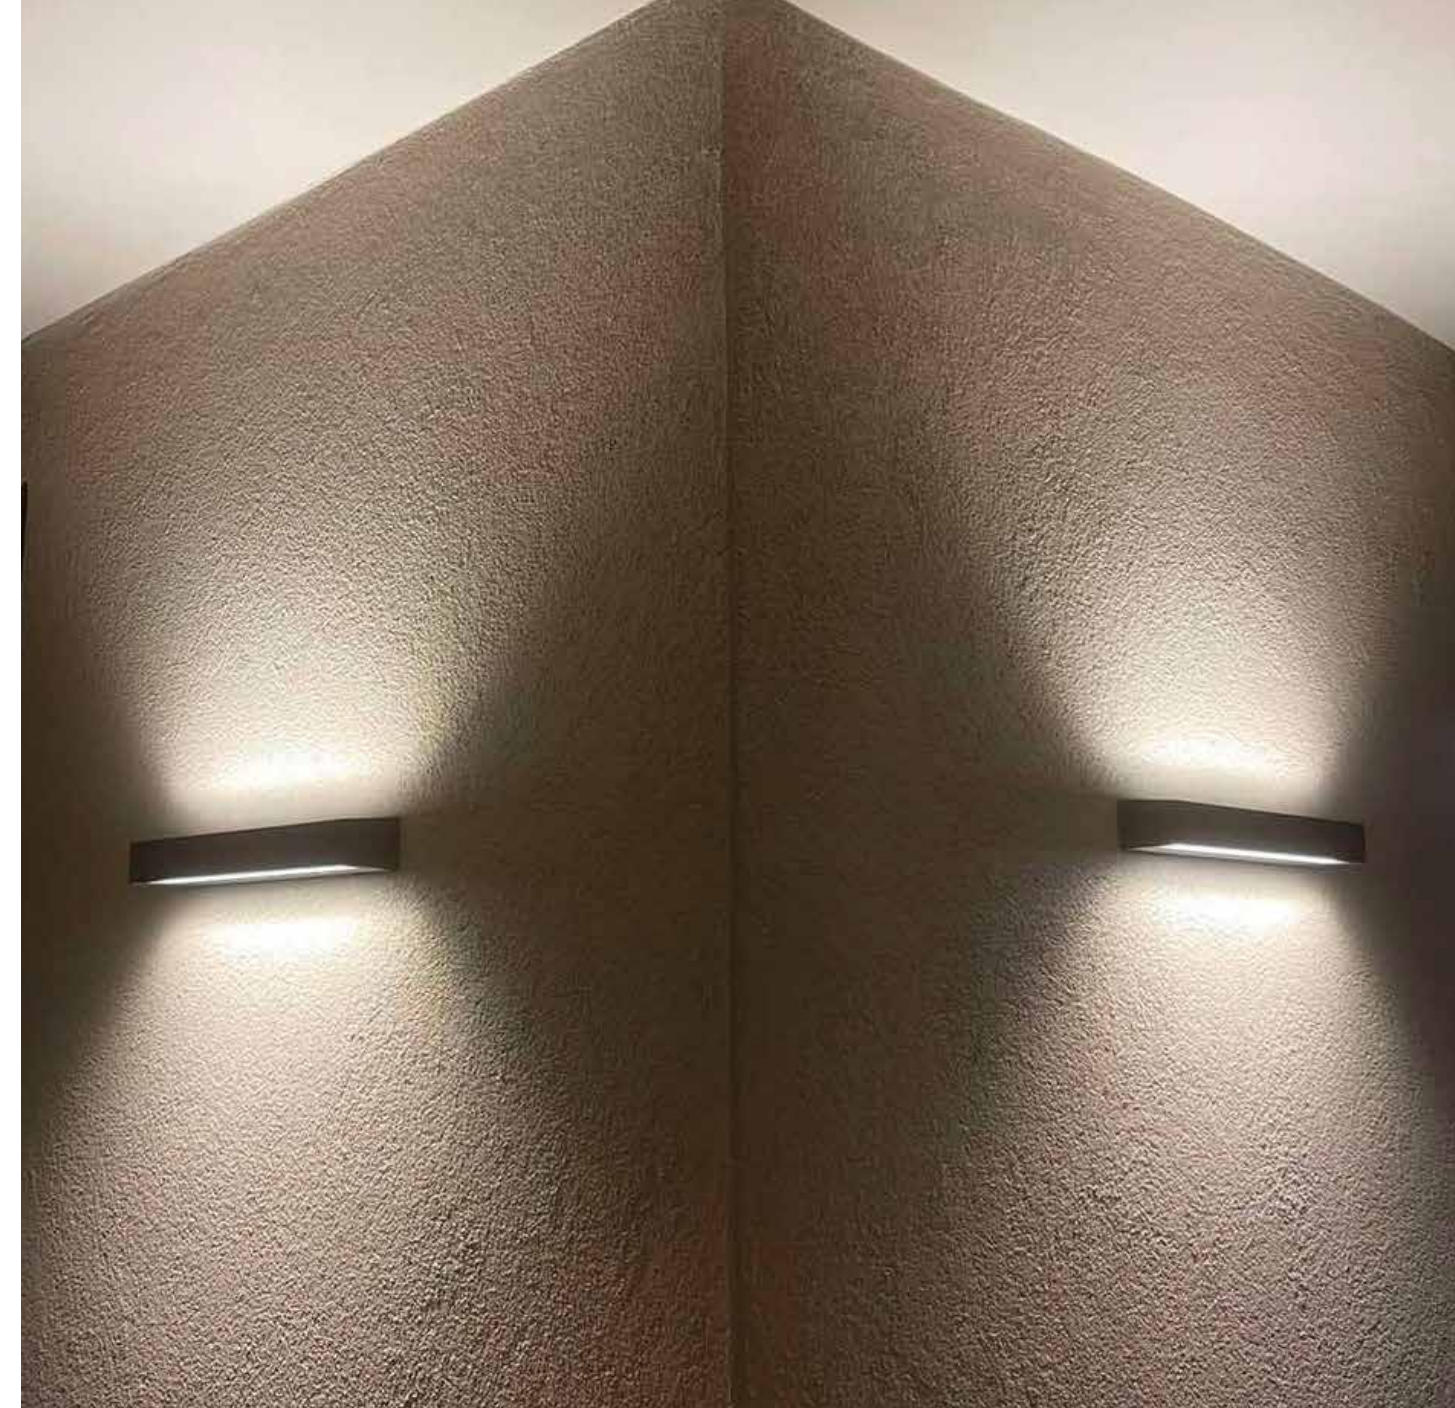

Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 44
 Dimensions L: 12cm W: 22cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E146**

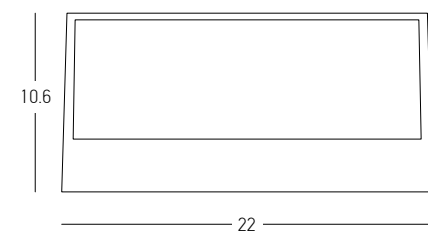



Power 2x 13.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1359Lm
 Cri 80
 IP 65
 Dimensions L: 10.6cm W: 22cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Dark Grey / **Code E261**
 Color Dark Brown / **Code E262**

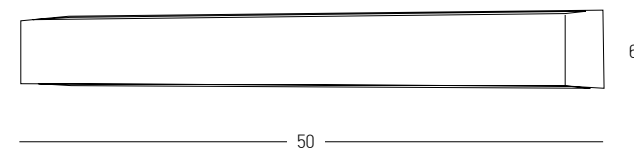


Power 30W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 2263Lm
 Cri 80
 IP 65
 Dimensions L: 7.5cm W: 50cm H: 6.5cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E227**



OUTDOOR LIGHTING | WALL



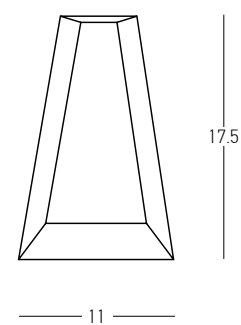
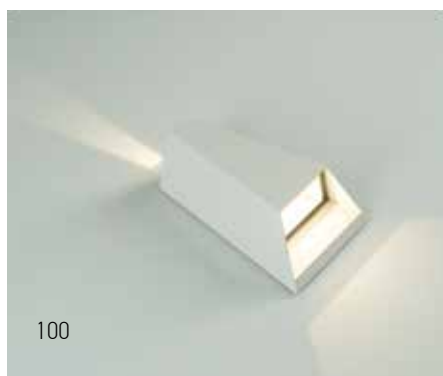



Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 54
 Dimensions L: 6.5cm W: 11cm H: 17.5cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E135**
 Color Sandy White / **Code E156**




Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 54
 Dimensions L: 8.2cm W: 8cm H: 8cm
 Material Aluminium - Tempered Glass
 Special Feature Movable
 Up - Down Lighting

Color Graphite / **Code E109**
 Color Sandy White / **Code E159**

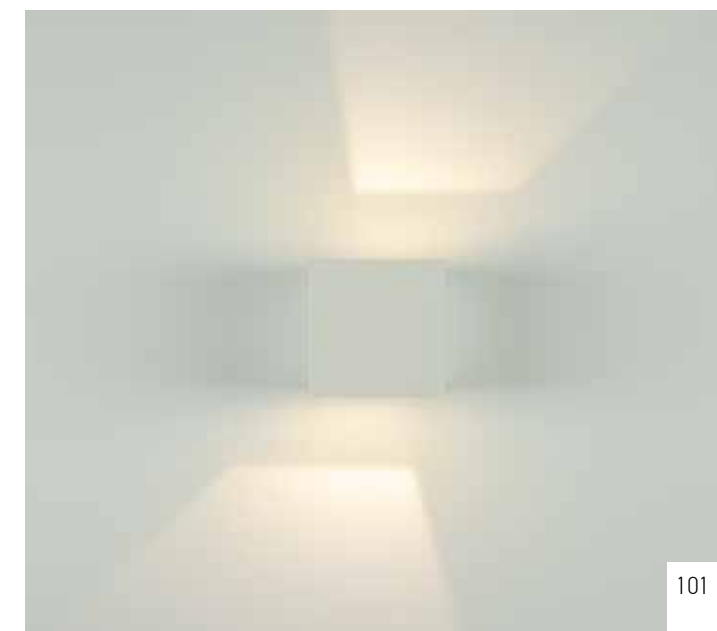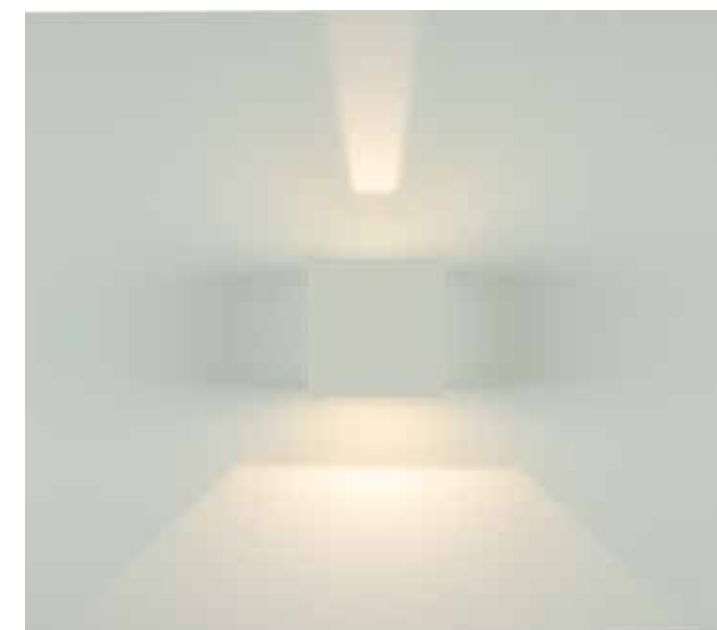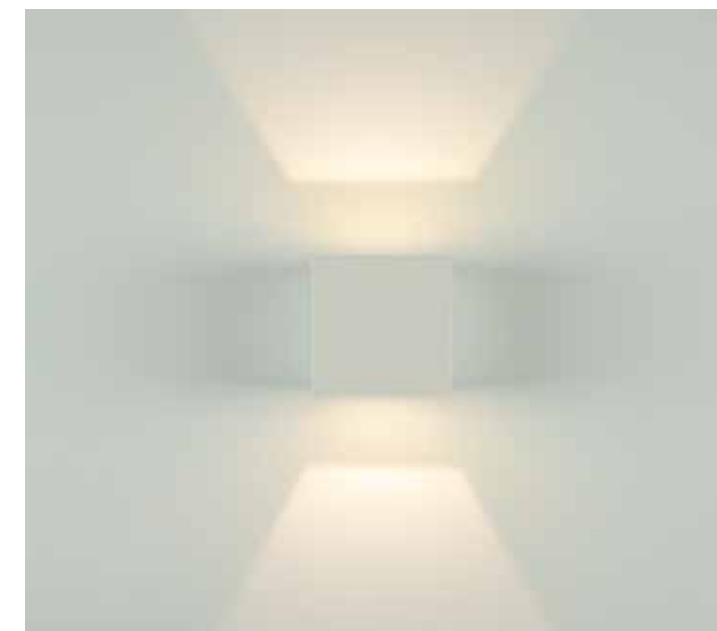


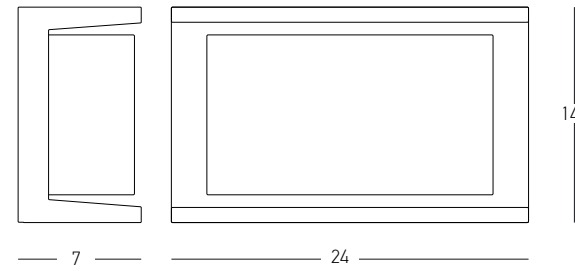


Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 7cm W: 24cm H: 14cm
 Material Alumunium - PC Diffuser
 Color Graphite / **Code E149**

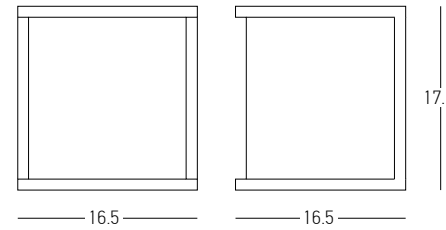


Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 16.5cm W: 16.5cm H: 17.1cm
 Material Alumunium - PC Diffuser
 Color Graphite / **Code E127**

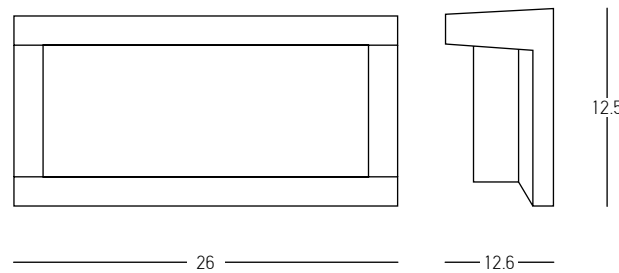


Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 12.6cm W: 26cm H: 12.5cm
 Material Alumunium - PC Diffuser
 Color Graphite / **Code E128**

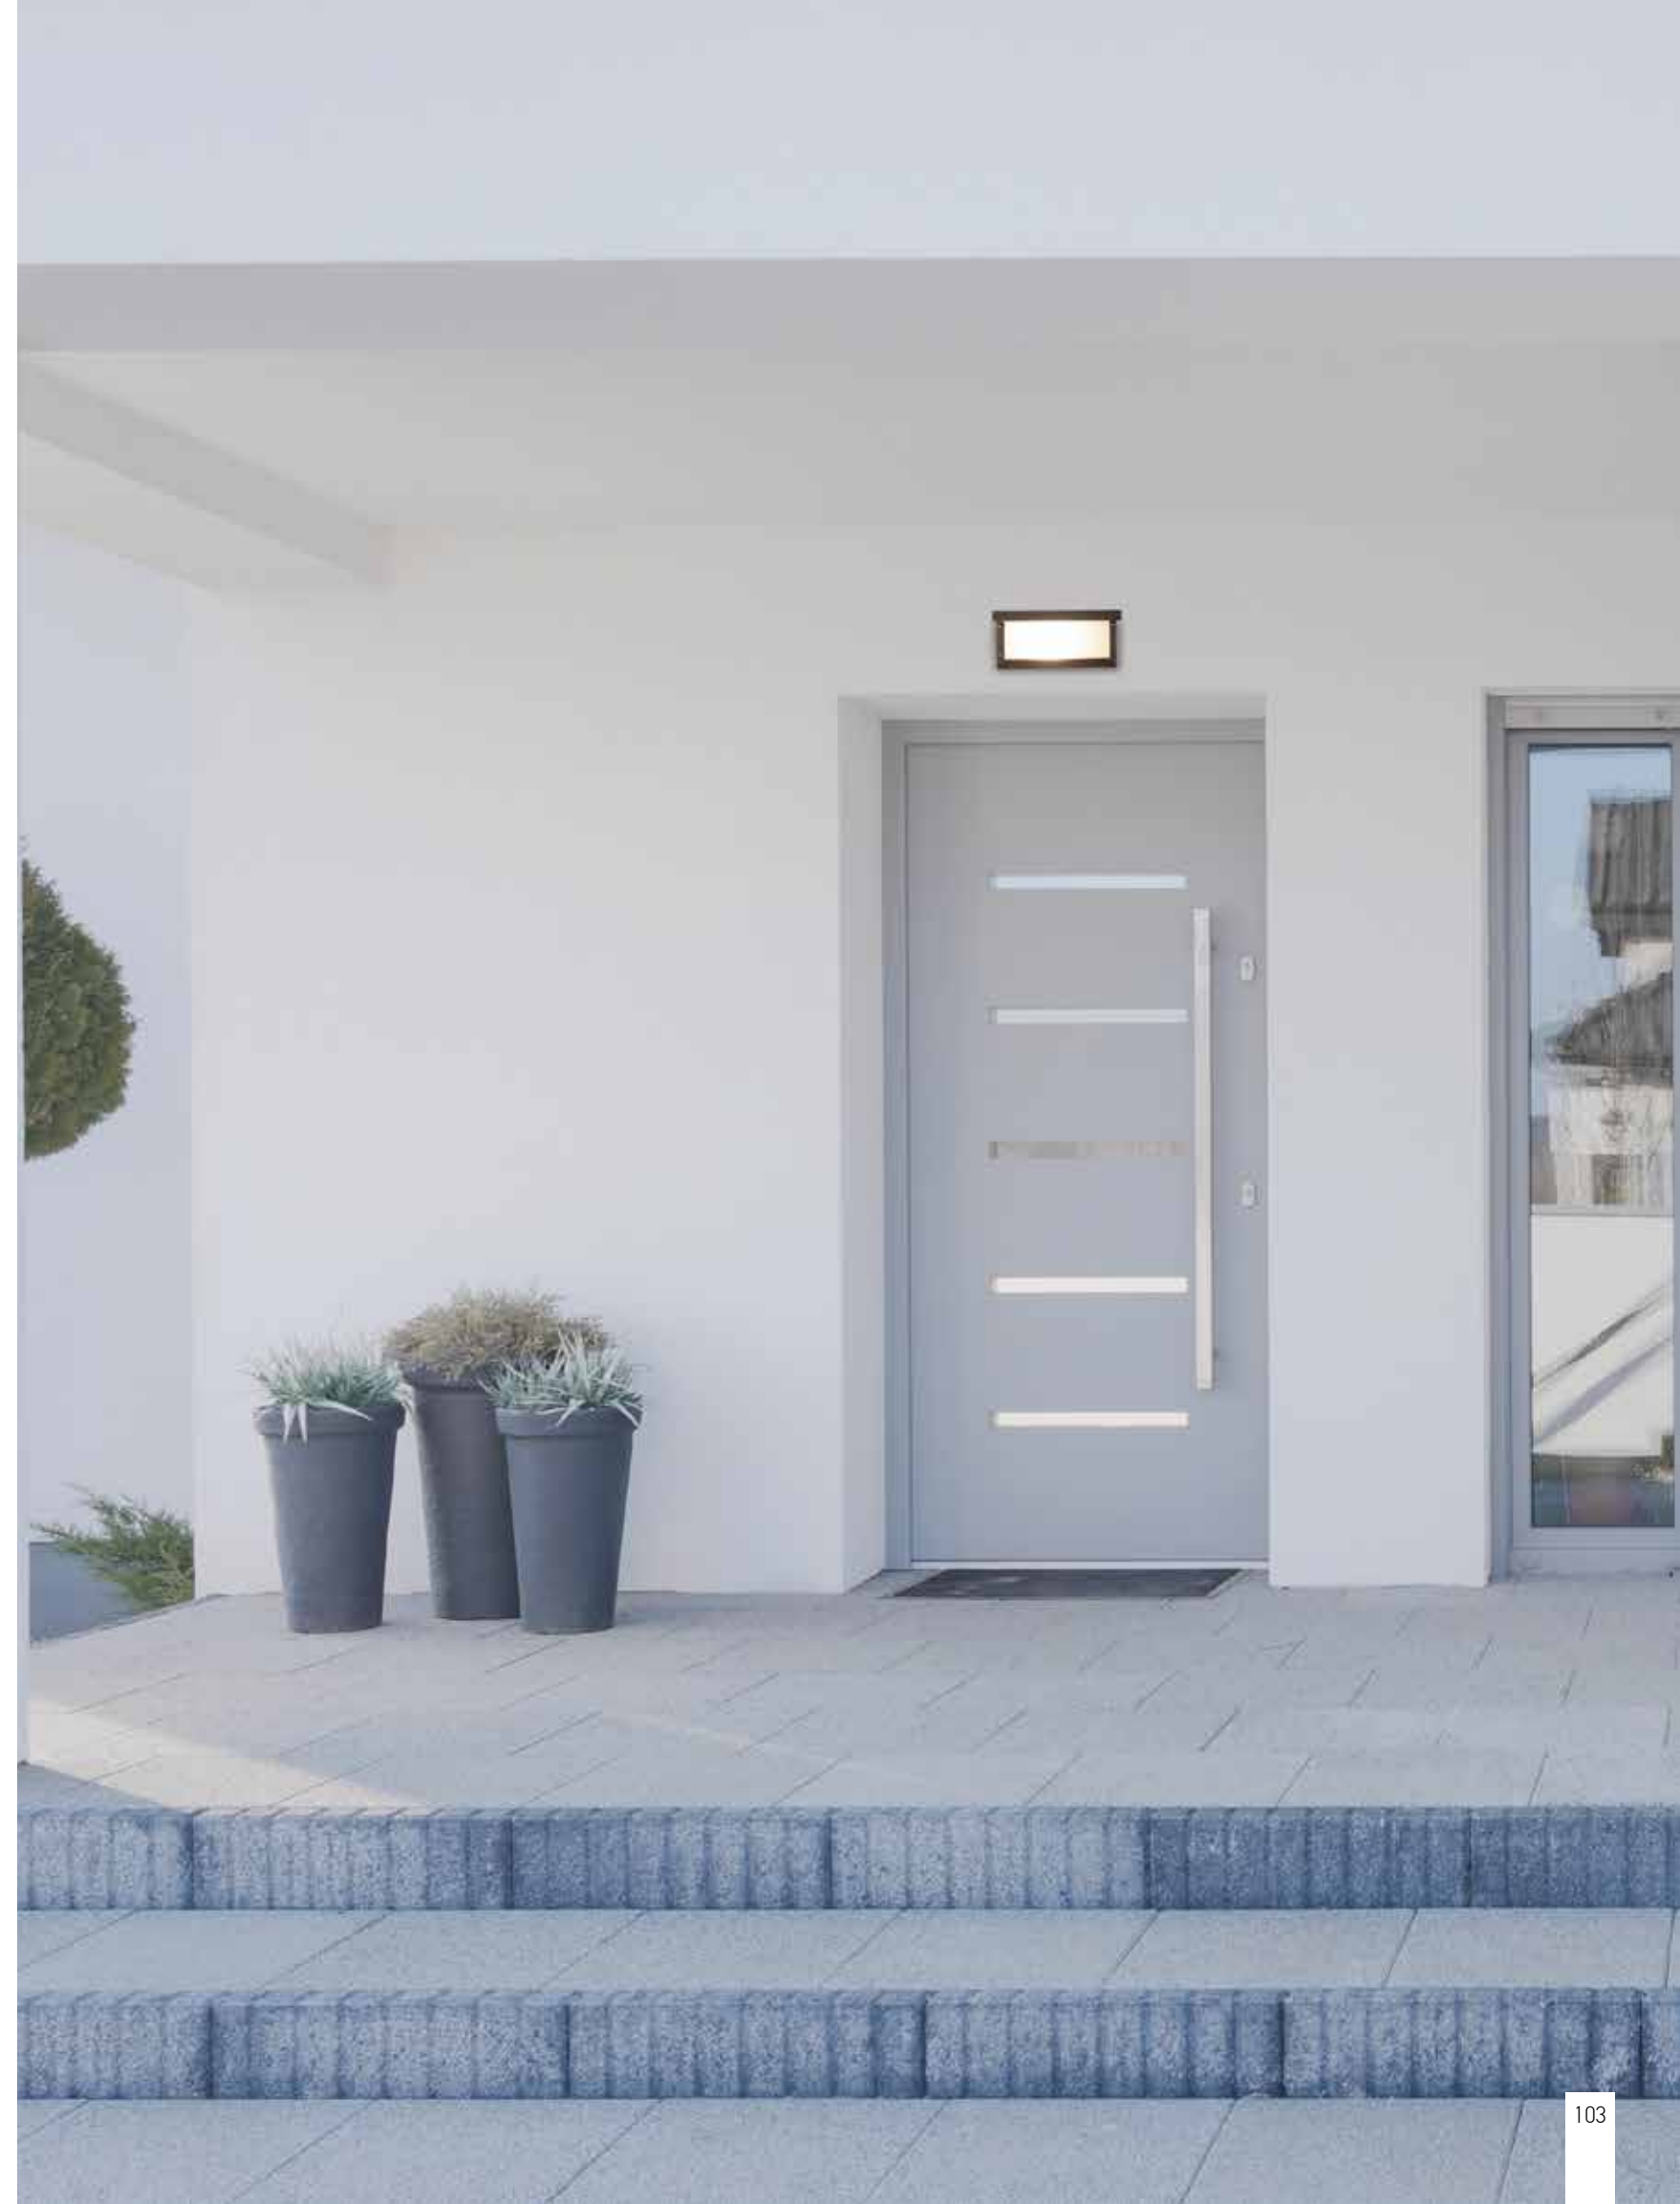


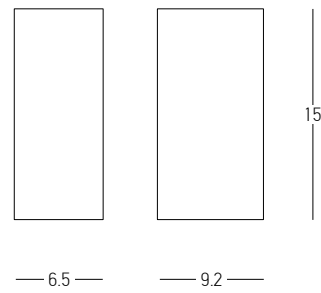


Bulb 2x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 15cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E124**

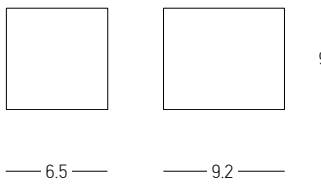

Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E123**

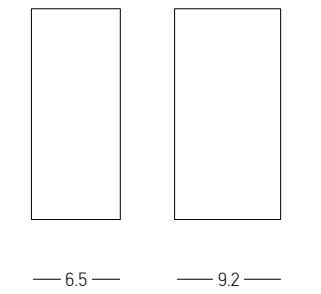


Bulb 2x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 15cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Graphite / **Code E122**

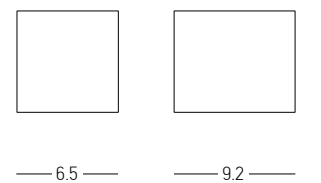


Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E121**




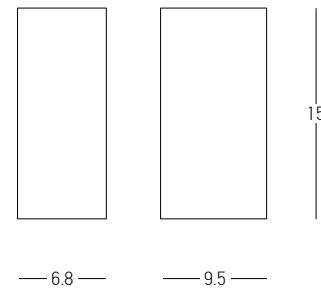


Bulb 2x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.5cm W: 6.8cm H: 15cm
 Material ABS - Acrylic
 Special Feature Up - Down Lighting
 Color Sandy Black / **Code E307**

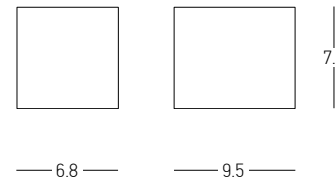


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.5cm W: 6.8cm H: 7.5cm
 Material ABS - Acrylic
 Color Sandy Black / **Code E306**

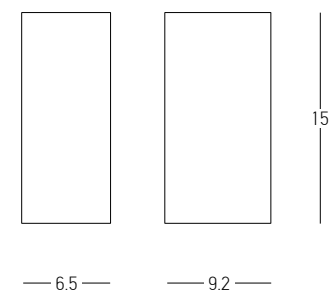


Bulb 2x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 15cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Sandy White / **Code E151**

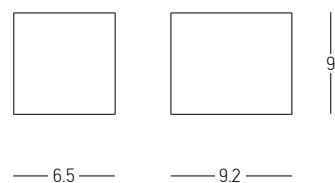


Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Color Sandy White / **Code E150**

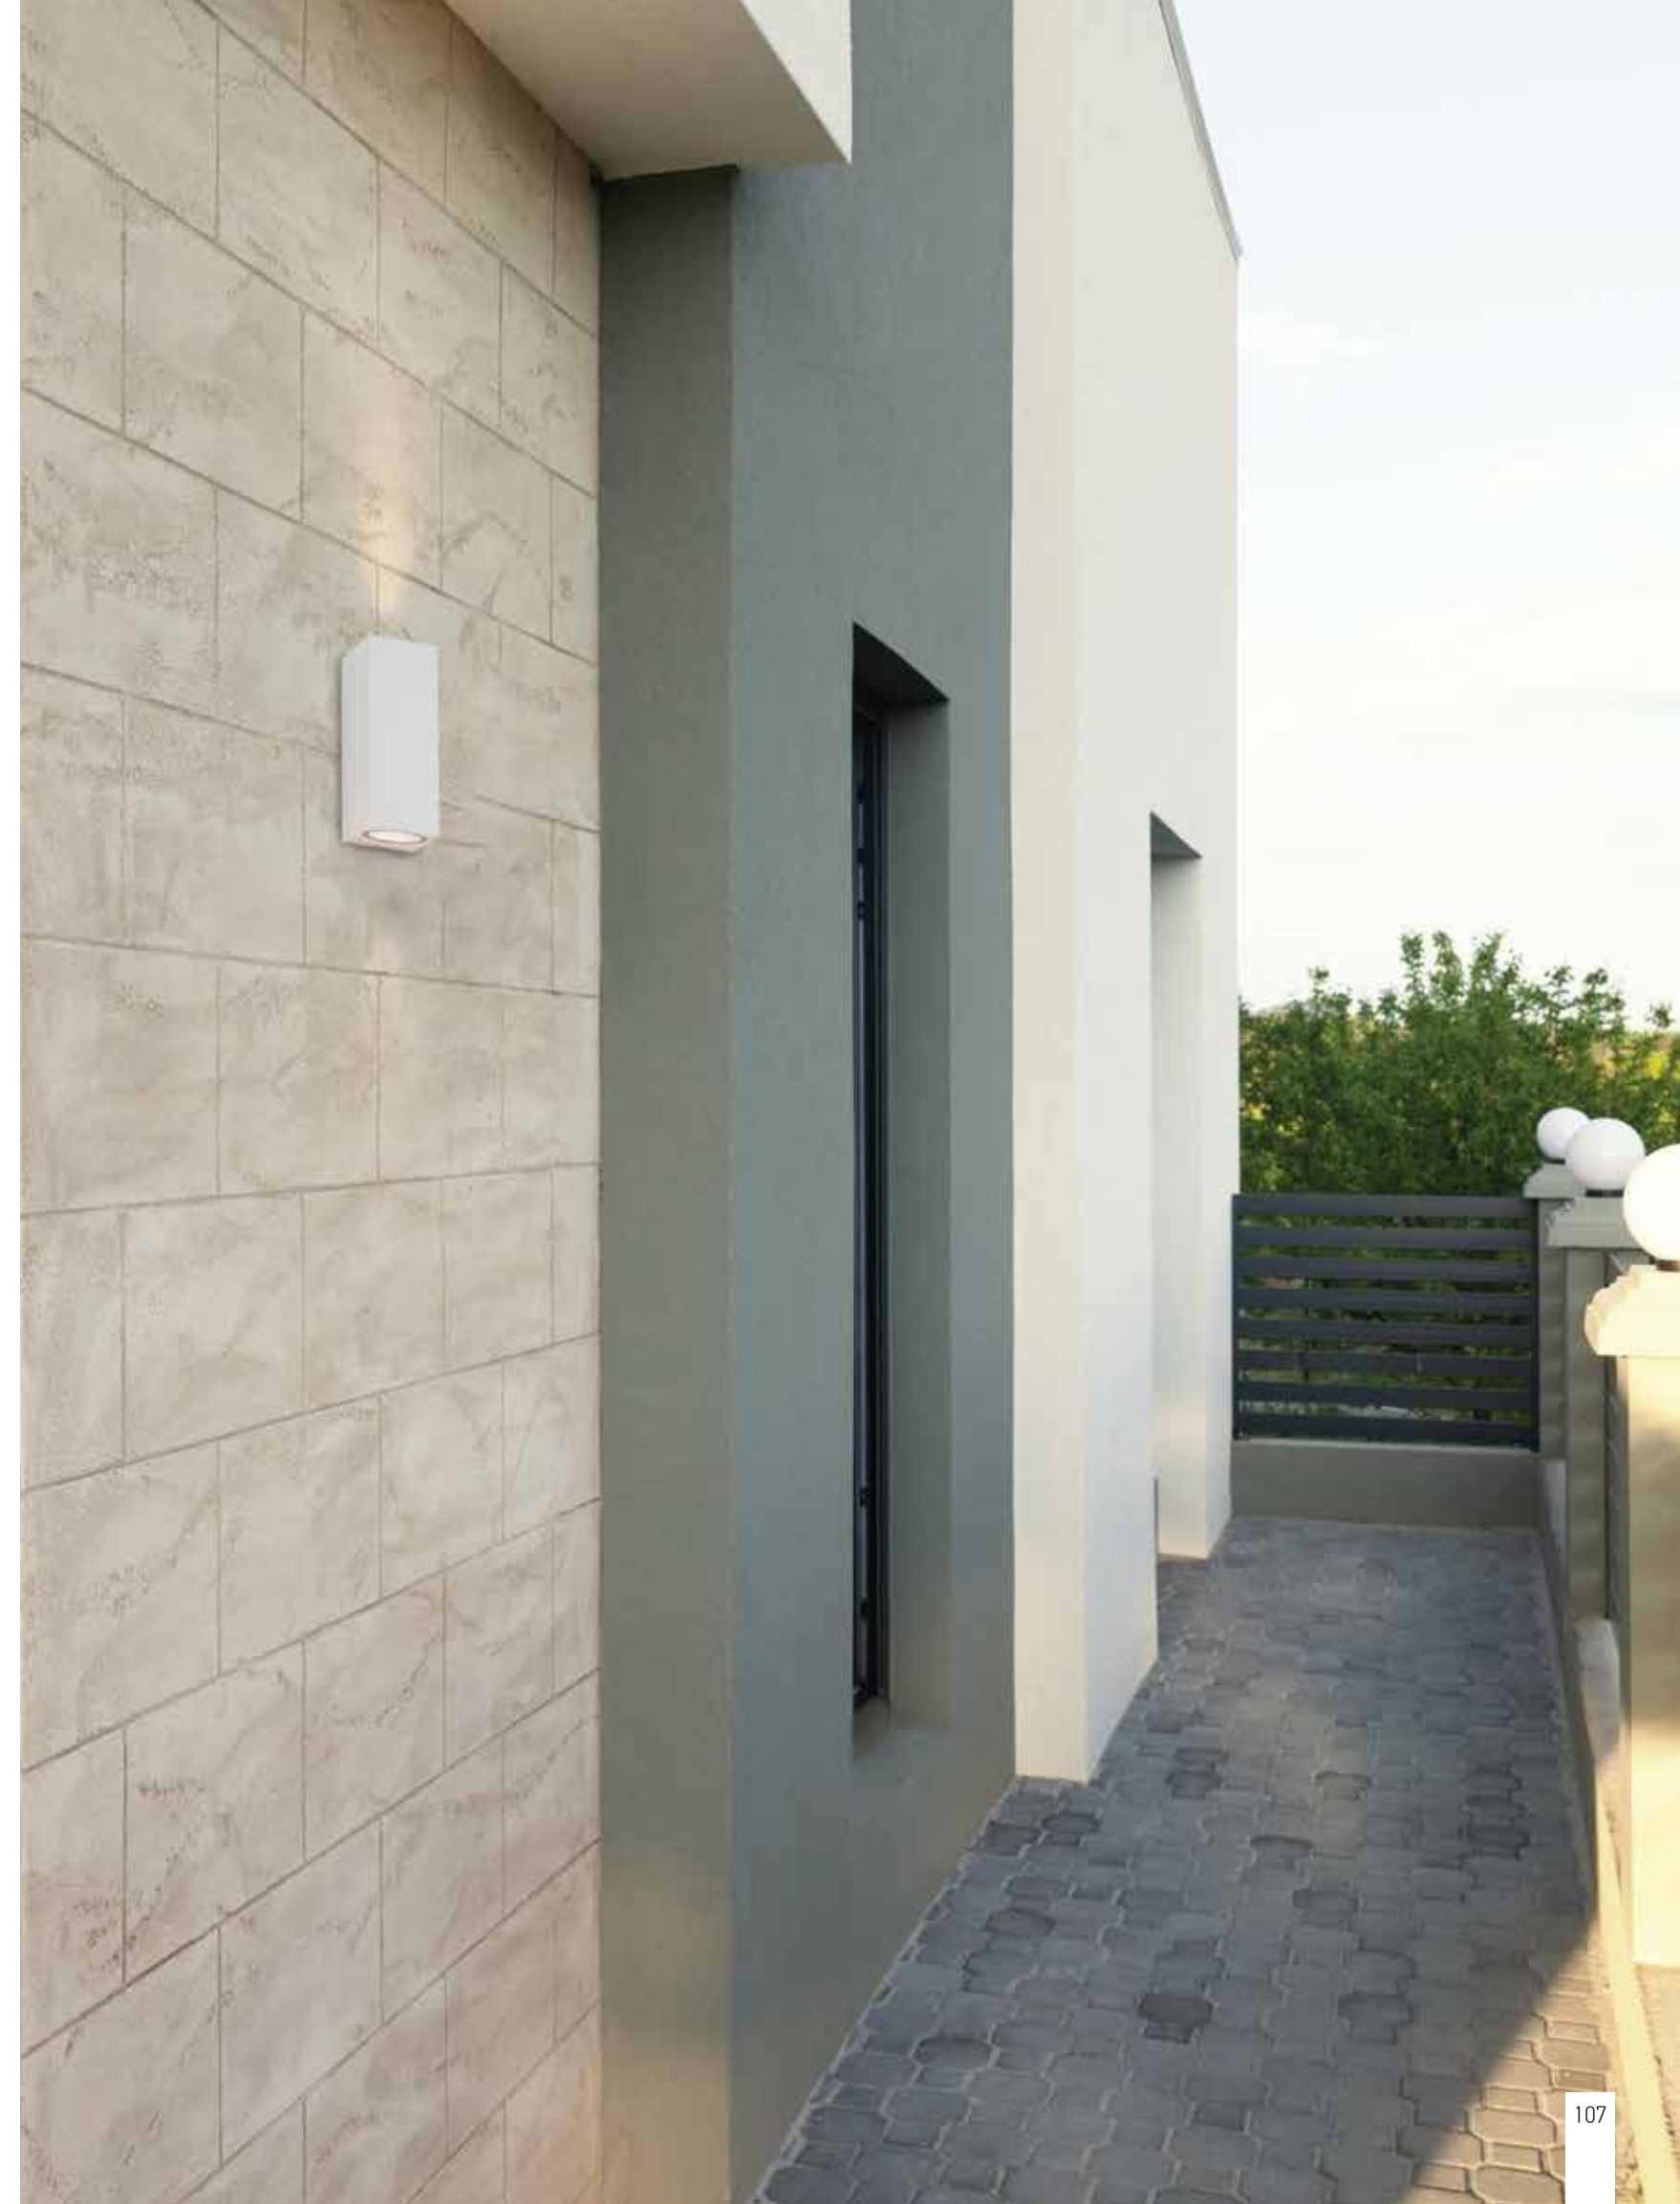

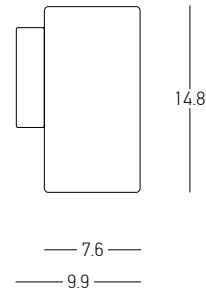


Bulb 1x GU10
 Power 9W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 7.6cm L: 9.9cm H: 14.8cm
 Material ABS - PC Diffuser
 Color White / **Code E185**

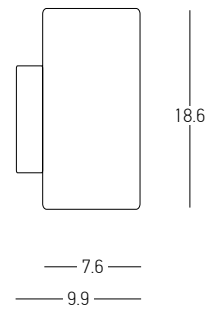


Bulb 2x GU10
 Power 9W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 7.6cm L: 9.9cm H: 18.6cm
 Material ABS - PC Diffuser
 Special Feature Up - Down Lighting
 Color White / **Code E186**



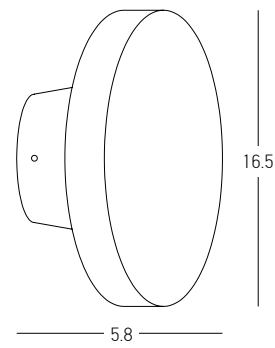


Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 720Lm
Cri 80
IP 65
Dimensions Ø: 16.5cm L: 5.8cm
Material ABS - PC Diffuser
Color Sandy Black / Code E305
Sandy White / Code E304






Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 653Lm
 Cri 80
 IP 54
 Dimensions L: 7.5cm W: 22cm H: 3.2cm
 Material Aluminium - Tempered Glass
 Color Sandy White / **Code E168**




Power 2x 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 320Lm
 Cri 80
 IP 65
 Dimensions L: 3cm W: 8.3cm H: 12.3cm
 Material ABS - PC Diffuser
 Special Feature Up - Down Lighting
 Color White / **Code E216**



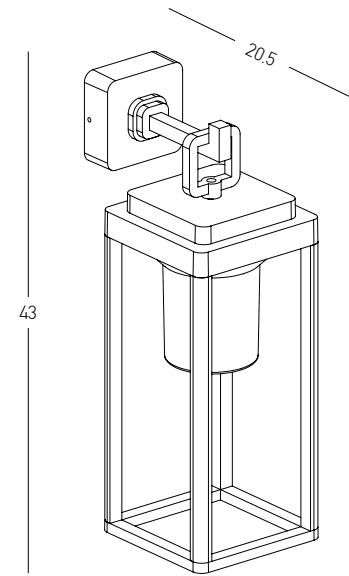


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 20.5cm W: 14.5cm H: 43cm
Base L: 3.3cm W: 9cm H: 9cm
Material Aluminium - Clear Diffuser
Color Dark Brown / **Code E343**



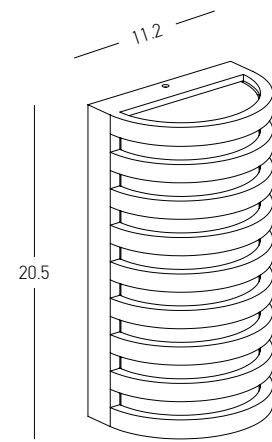


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 929Lm
 Cri 80
 IP 65
 Dimensions L: 8cm W: 11.2cm H: 20.5cm
 Material Aluminium - PC Diffuser
 Color Dark Brown / **Code E341**

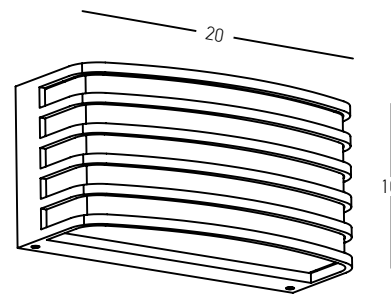


Bulb 1x E27
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9cm W: 20cm H: 10cm
 Material Aluminium - PC Diffuser
 Color Dark Brown / **Code E275**



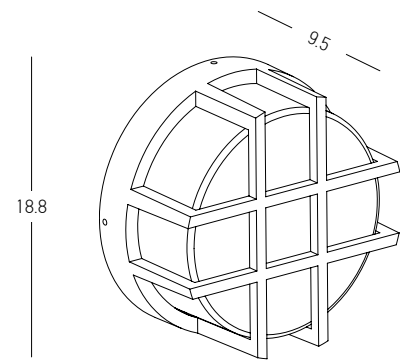


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 880Lm
Cri 80
IP 65
Dimensions Ø: 18.8cm L: 9.5cm
Material Aluminium - PC Diffuser
Color Dark Brown / Code E342



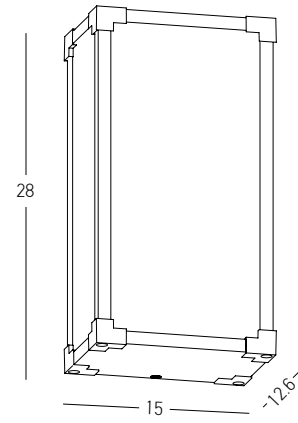


Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 816Lm
Cri 80
IP 65
Dimensions L: 12.6cm W: 15cm H: 28cm
Material Aluminium - Opal PC Diffuser
Color Dark Brown / Code E263




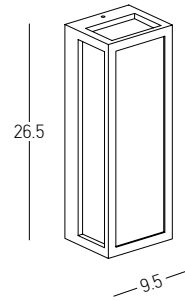

Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 810Lm
 Cri 80
 IP 65
 Dimensions L: 9cm W: 9.5cm H: 26.5cm
 Material Aluminium - PC Diffuser
 Color Sandy Black / **Code E202**

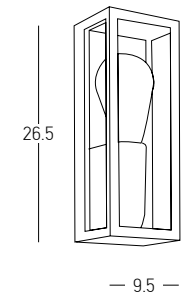


Bulb 1x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 9cm W: 9.5cm H: 26.5cm
 Material Aluminium - Clear Diffuser
 Color Sandy Black / **Code E201**

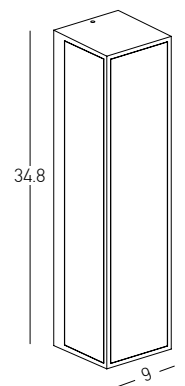


Bulb 2x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9cm W: 8.6cm H: 34.8cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E296**




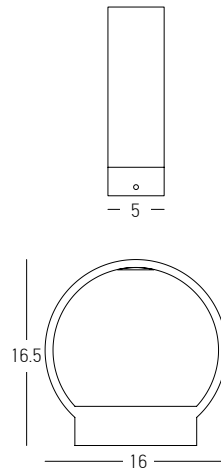


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 530Lm
 Cri 80
 IP 65
 Dimensions L: 16.5cm W: 16cm H: 5cm
 Material Aluminium - Tempered Glass
 Special Feature Up - Down Lighting
 Color Dark Brown / **Code E268**

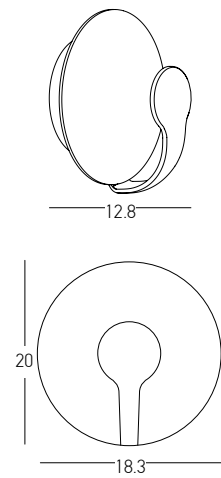




Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 880Lm
 Cri 80
 IP 65
 Dimensions L: 12.8cm W: 18.3cm H: 20cm
 Material Aluminium
 Color Dark Brown - Sandy White / **Code E271**

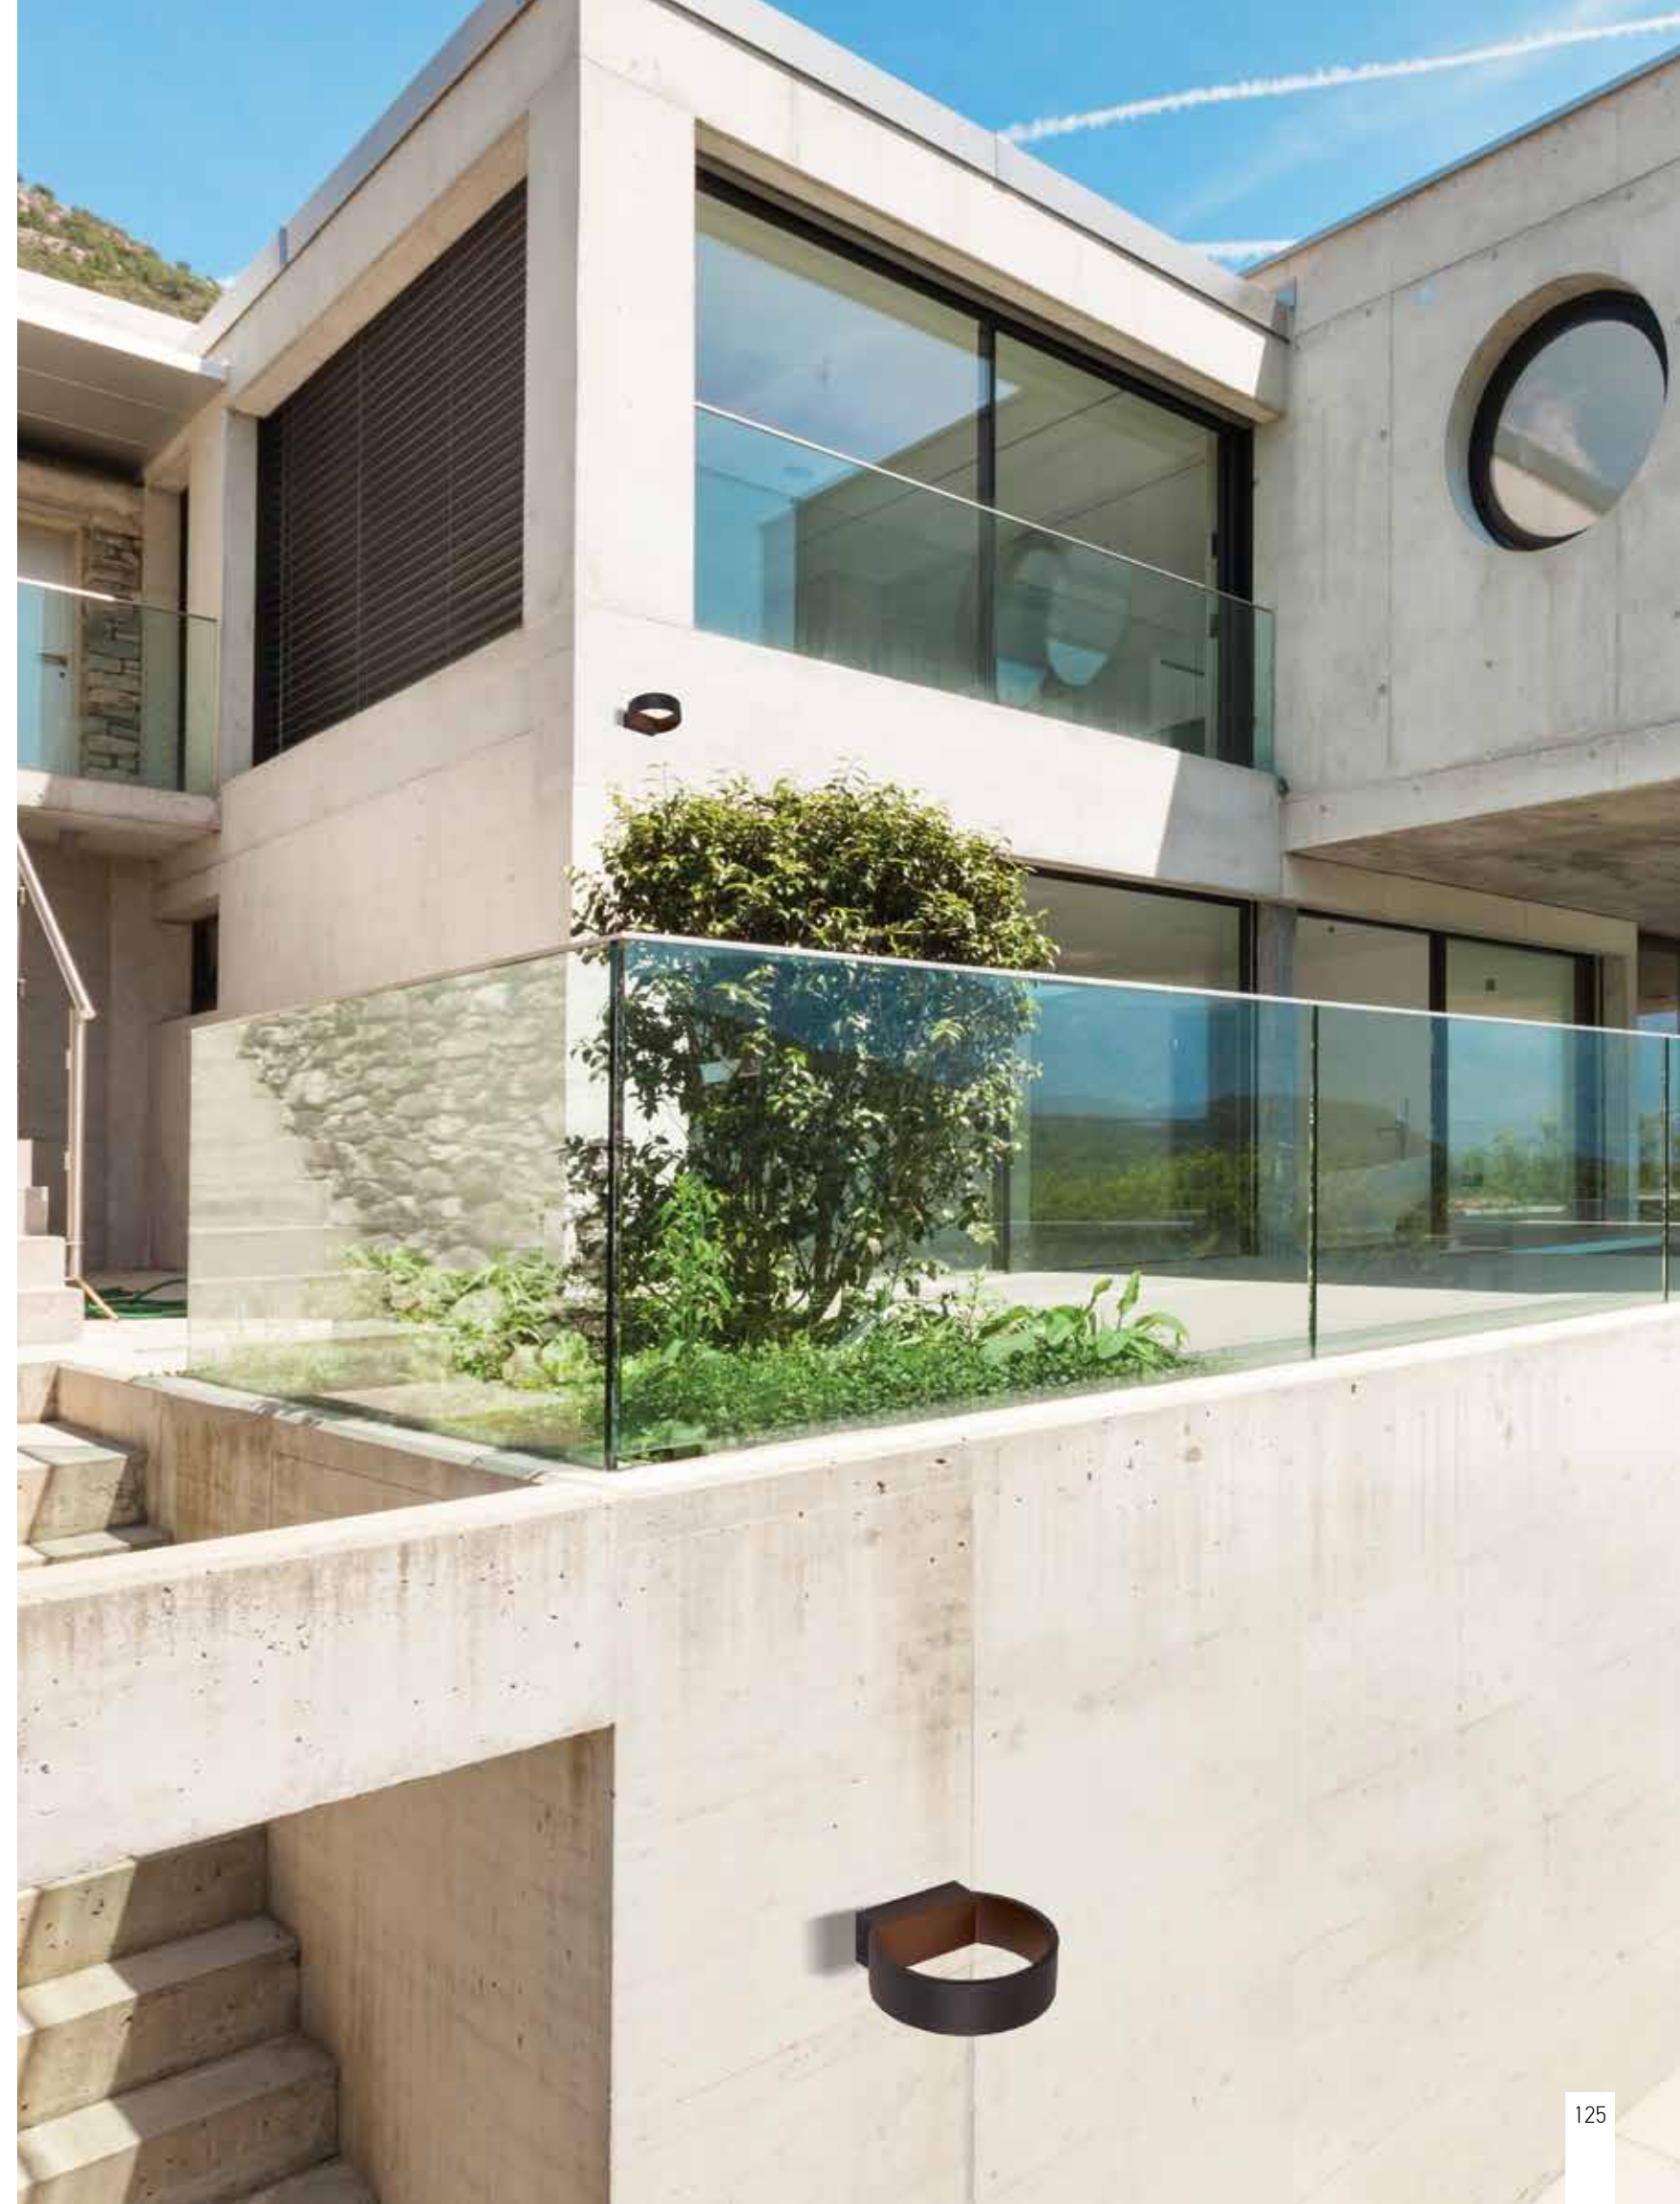

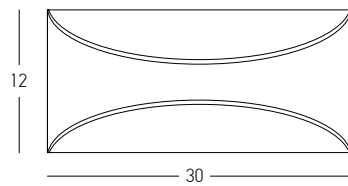

Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 640Lm
Cri 80
IP 65
Dimensions L: 9.6cm W: 30cm H: 12cm
Material Aluminium - Opal PC Diffuser
Special Feature Up - Down Lighting
Color Dark Grey / **Code E265**
Color Dark Brown / **Code E266**

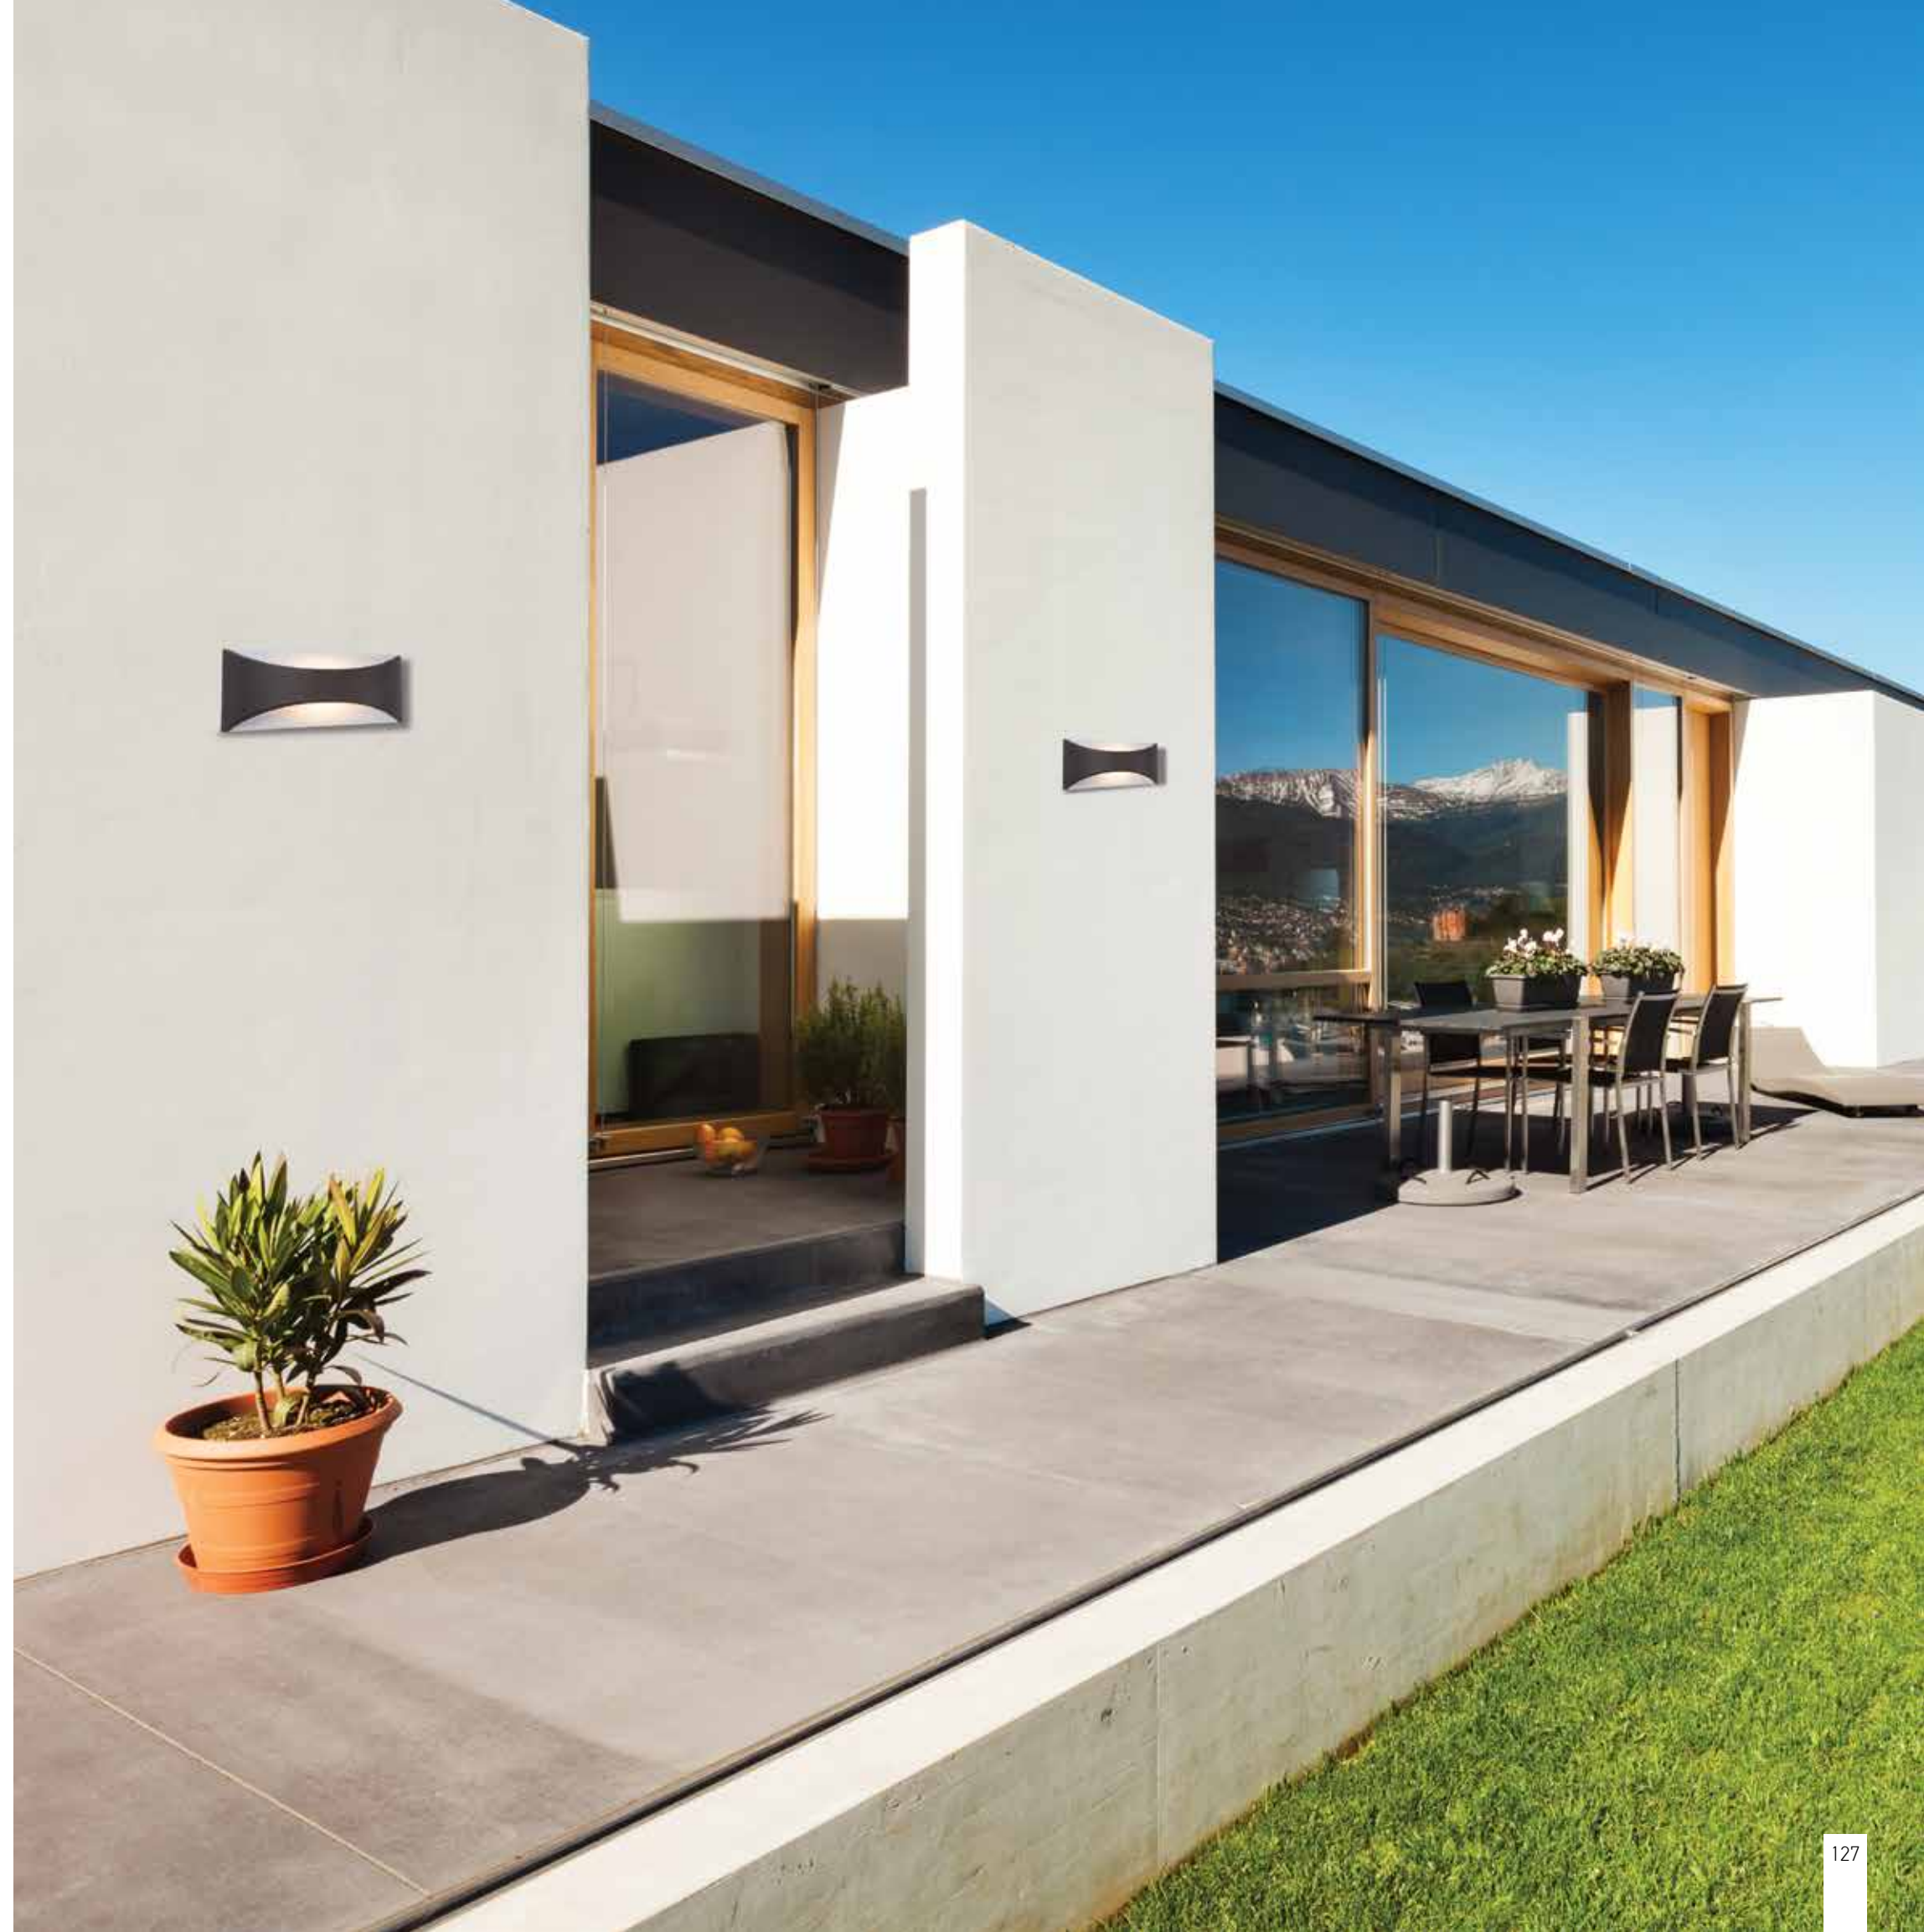


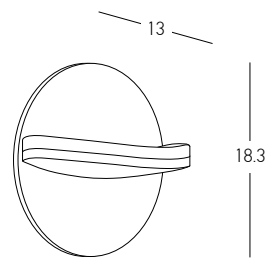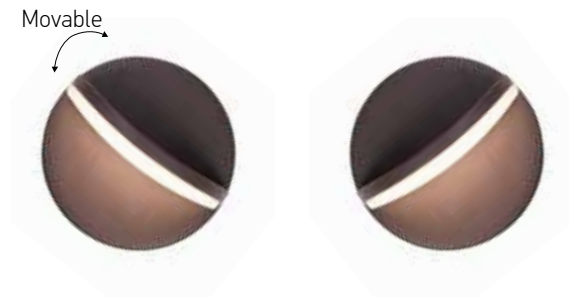


Power 16W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1106Lm
Cri 80
IP 65
Dimensions Ø: 18.3cm L: 13cm
Material Aluminium - Opal PC Diffuser
Special Feature Movable Light
Color Dark Brown / **Code E267**




SPIKES | p.130-163

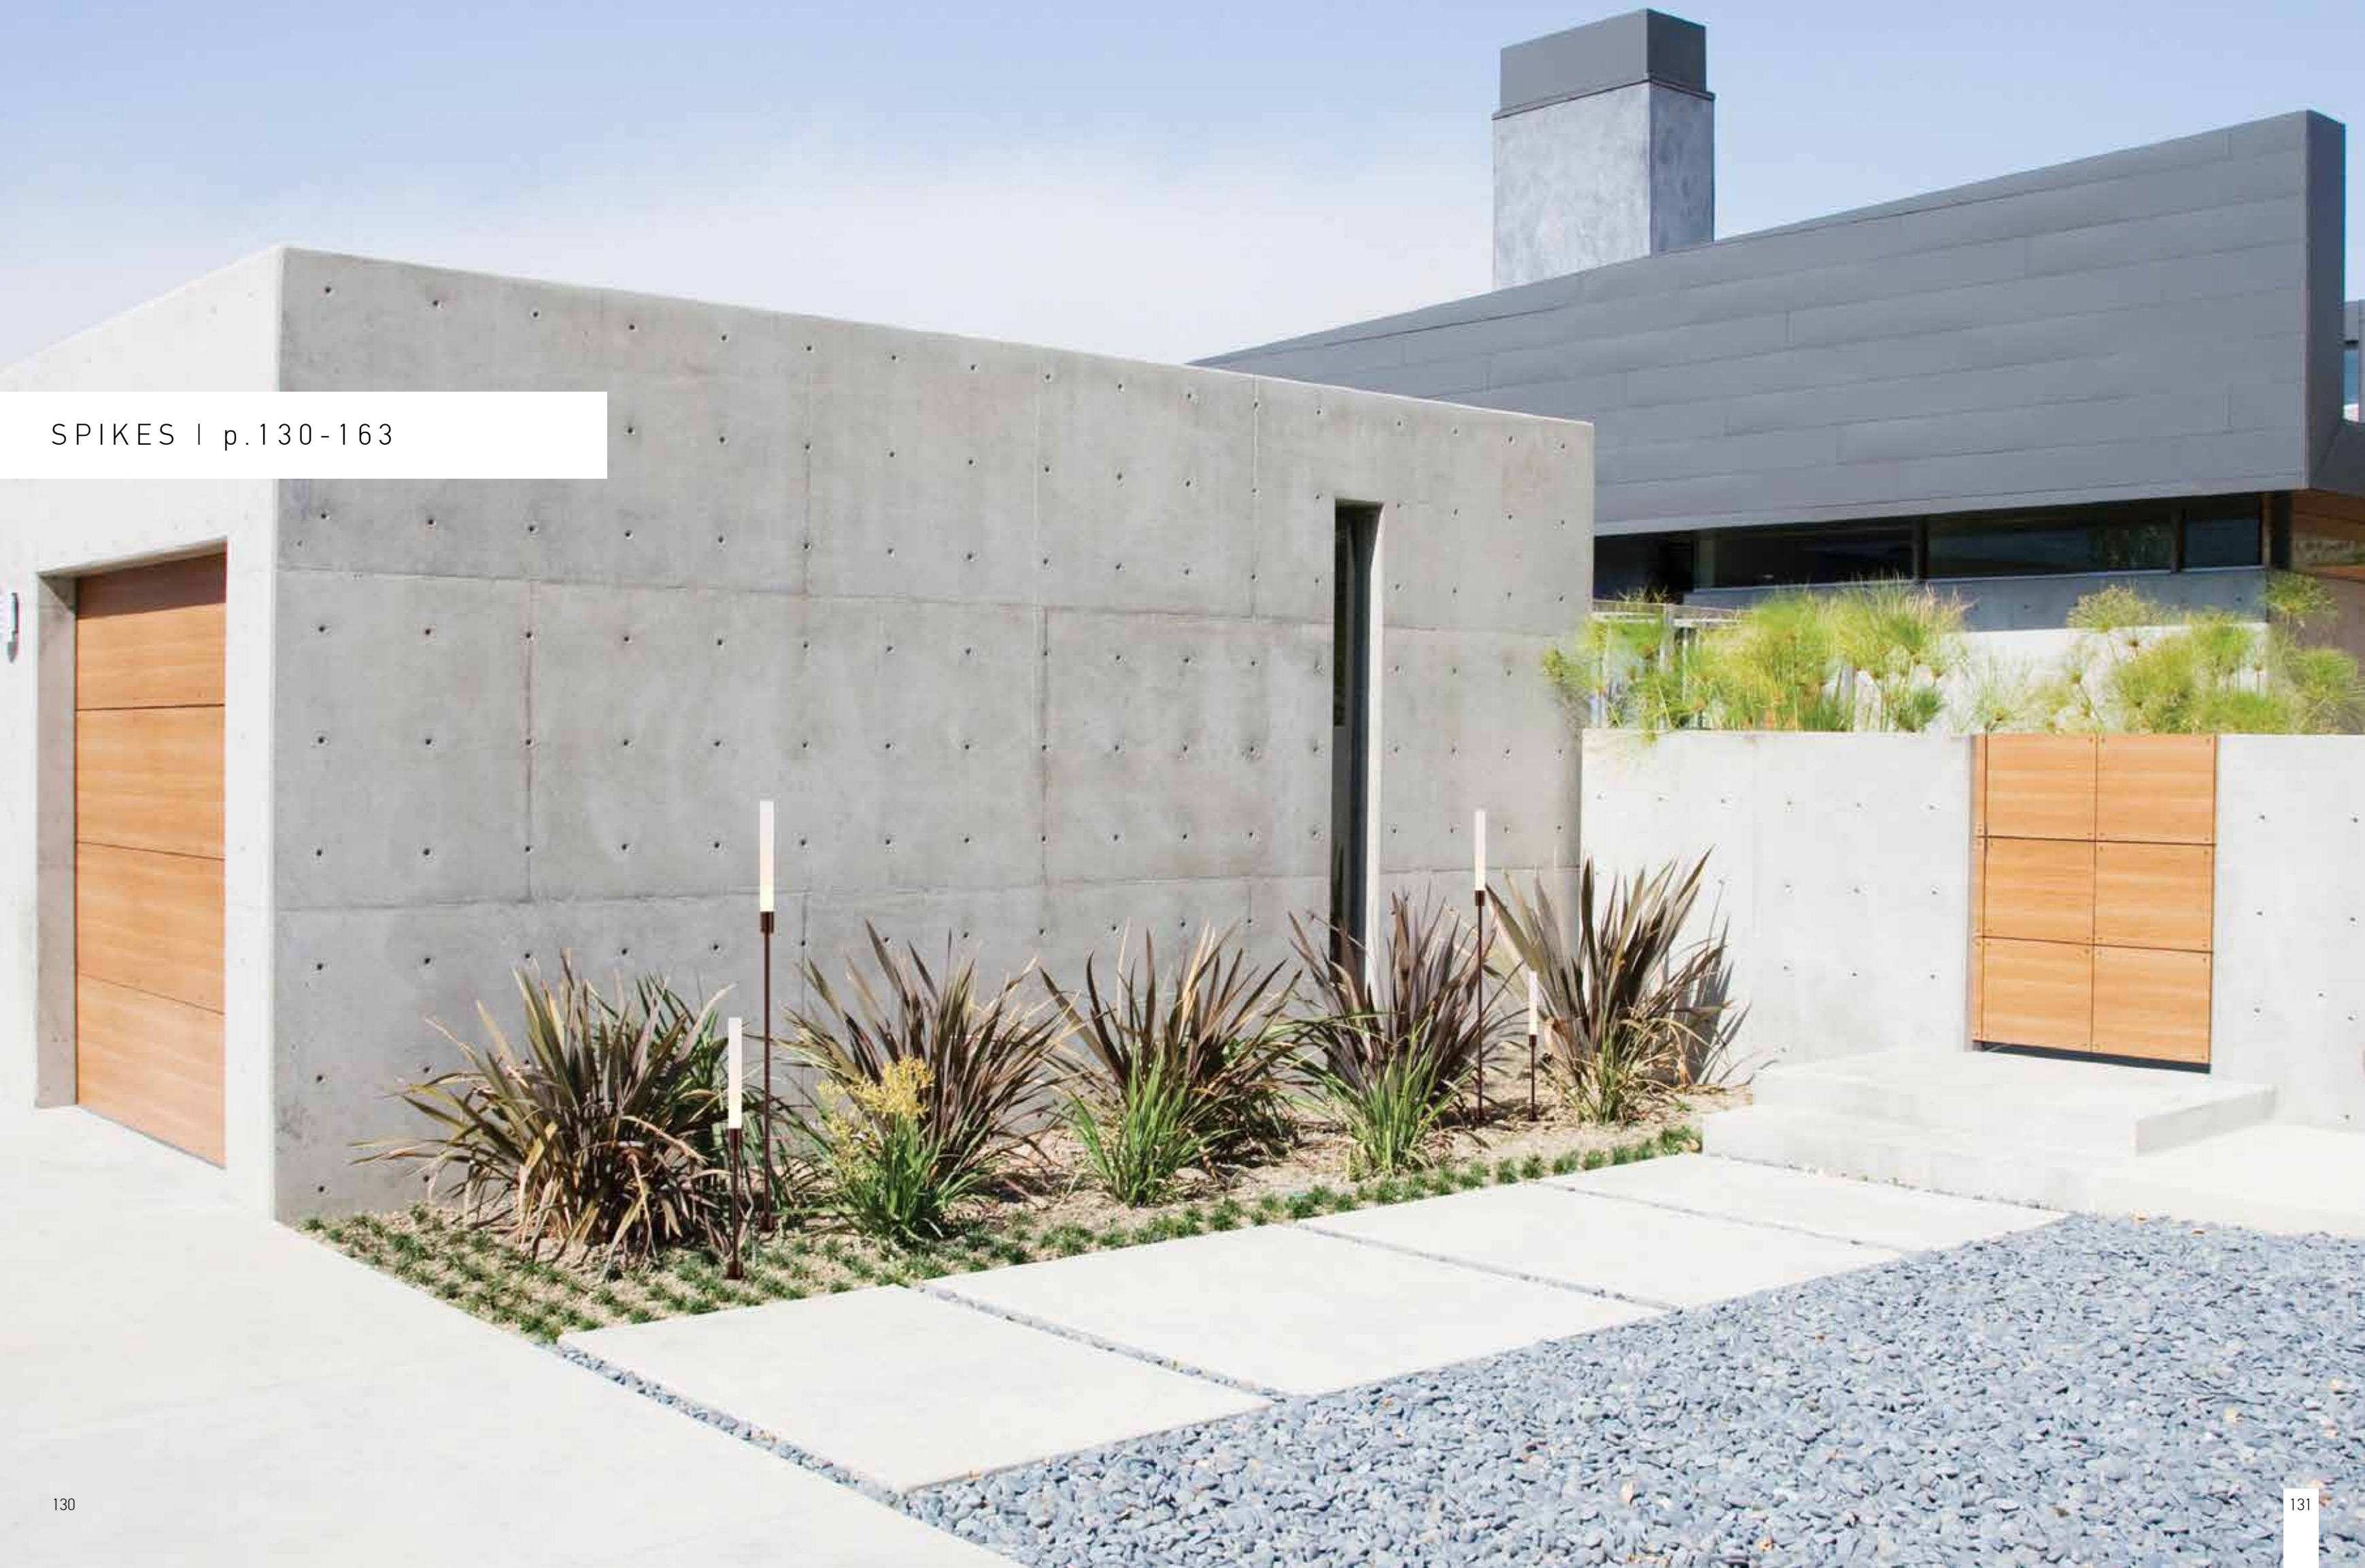

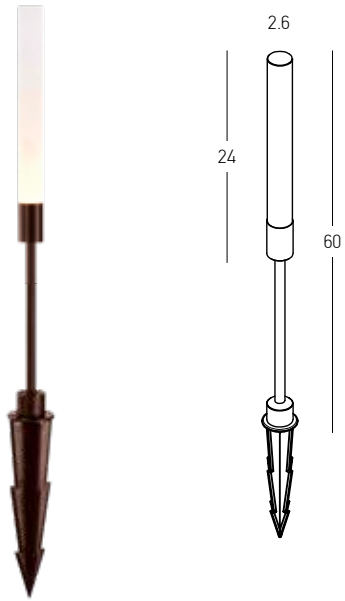

Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 180Lm
 Cri 80
 IP 65
 Dimensions Ø: 2.6cm H: 60cm
 Base Ø: 10cm H: 2cm
 Material Aluminium - Acrylic
 Special Feature 30cm Cable Available
 Spike & Base Included
 Recommended Driver D-20-24 (Not Included)
 In Parallel Connection 1-6 pcs

Color Dark Brown / **Code E372**

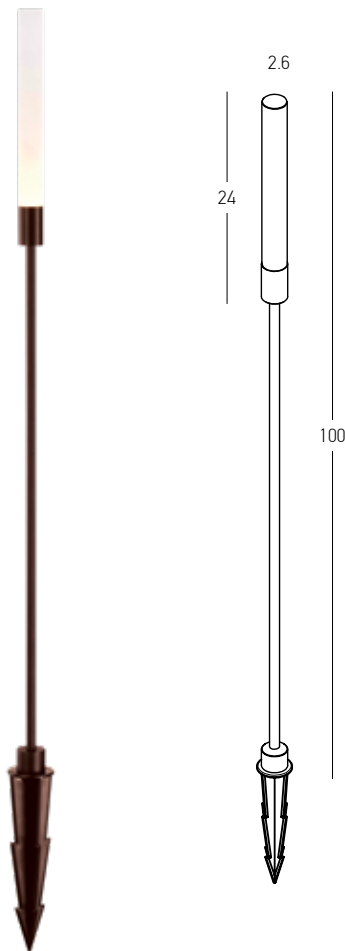

Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 180Lm
 Cri 80
 IP 65
 Dimensions Ø: 2.6cm H: 100cm
 Base Ø: 10cm H: 2cm
 Material Aluminium - Acrylic
 Special Feature 30cm Cable Available
 Spike & Base Included
 Recommended Driver D-20-24 (Not Included)
 In Parallel Connection 1-6 pcs

Color Dark Brown / **Code E373**




Driver **D-20-24**
 Power 20W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 12cm W: 4cm H: 2.5cm
 IP 20



Waterproof Connection Box 1in / 1out , 16A , 450V
 IP 67
 Color Black / **Code Z0800-BA**



OUTDOOR LIGHTING | SPIKES

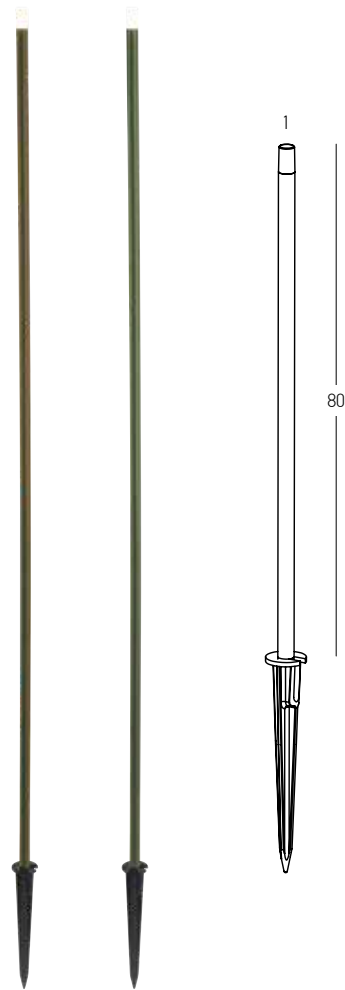

Power 1W
 Input 24V
 Color Temperature 2700K
 Lumen 58Lm
 Cri 80
 IP 65
 Dimensions Ø: 1cm H: 80cm
 Material Stainless Steel - PC Diffuser
 Special Feature 100cm Cable Available
 Spike Included
 Recommended Driver D-20-24 (Not Included)
 In Parallel Connection 1-19 pcs
 Color Dark Brown / **Code E330**
 Dark Green / **Code E331**



Power 1W
 Input 24V
 Color Temperature 2700K
 Lumen 58Lm
 Cri 80
 IP 65
 Dimensions Ø: 1cm H: 30cm
 Material Stainless Steel - PC Diffuser
 Special Feature 100cm Cable Available
 Spike Included
 Recommended Driver D-20-24 (Not Included)
 In Parallel Connection 1-19 pcs
 Color Dark Brown / **Code E328**
 Dark Green / **Code E329**




Driver
 Power 20W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 12cm W: 4cm H: 2.5cm
 IP 20

D-20-24
 Power 20W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 12cm W: 4cm H: 2.5cm
 IP 20




Waterproof Connection Box 1in / 1out . 16A . 450V
 IP 67
 Color Black / **Code Z0800-BA**



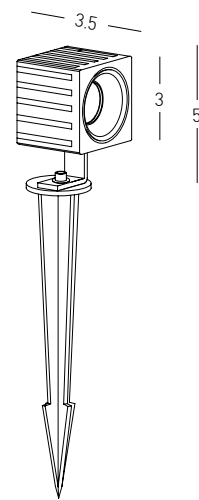

Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 228Lm
 Cri 90
 IP 65
 Dimensions L: 3cm W: 3.5cm H: 5cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature Movable Spot
 Spike Included
 Recommended Driver D-20-24 (Not Included)
 In Parallel Connection 1-6 pcs
 Color Graphite / **Code E350**

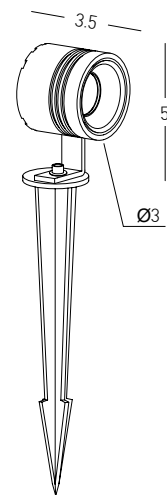

Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 228Lm
 Cri 90
 IP 65
 Dimensions Ø: 3cm L: 3.5cm H: 5cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature Movable Spot
 Spike Included
 Recommended Driver D-20-24 (Not Included)
 In Parallel Connection 1-6 pcs
 Color Graphite / **Code E349**




Driver
 Power 20W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 12cm W: 4cm H: 2.5cm
 IP 20



Waterproof Connection Box 1in / 1out . 16A . 450V
 IP 67
 Color Black / **Code Z0800-BA**



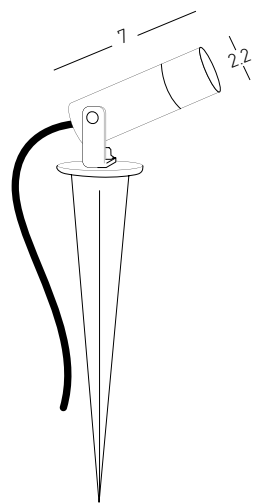

Power 2.3W
 Input 3.2V , 700mA
 Color Temperature 2700K
 Lumen 130Lm
 Cri 80
 IP 54
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm
 Beam Angle 40°
 Material Brush
 Special Feature 60cm Cable Available
 Movable Spot
 Spike Included
 Optional In Special RAL

Recommended Driver V350-1050 (Not Included)
 In Series Connection 1-9 pcs

Color Natural Brush / **Code E403**




Power 2.3W
 Input 3.2V , 700mA
 Color Temperature 3000K
 Lumen 130Lm
 Cri 80
 IP 54
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm
 Beam Angle 40°
 Material Brush
 Special Feature 60cm Cable Available
 Movable Spot
 Spike Included
 Optional In Special RAL


Recommended Driver V350-1050 (Not Included)
 In Series Connection 1-9 pcs

Color Natural Brush / **Code E404**




Driver **V350-1050**
 Power 34W
 Input 220-240V, 50/60Hz
 Output 2 - 32V
 Dimensions L: 15cm W: 4cm H: 3cm
 IP 20

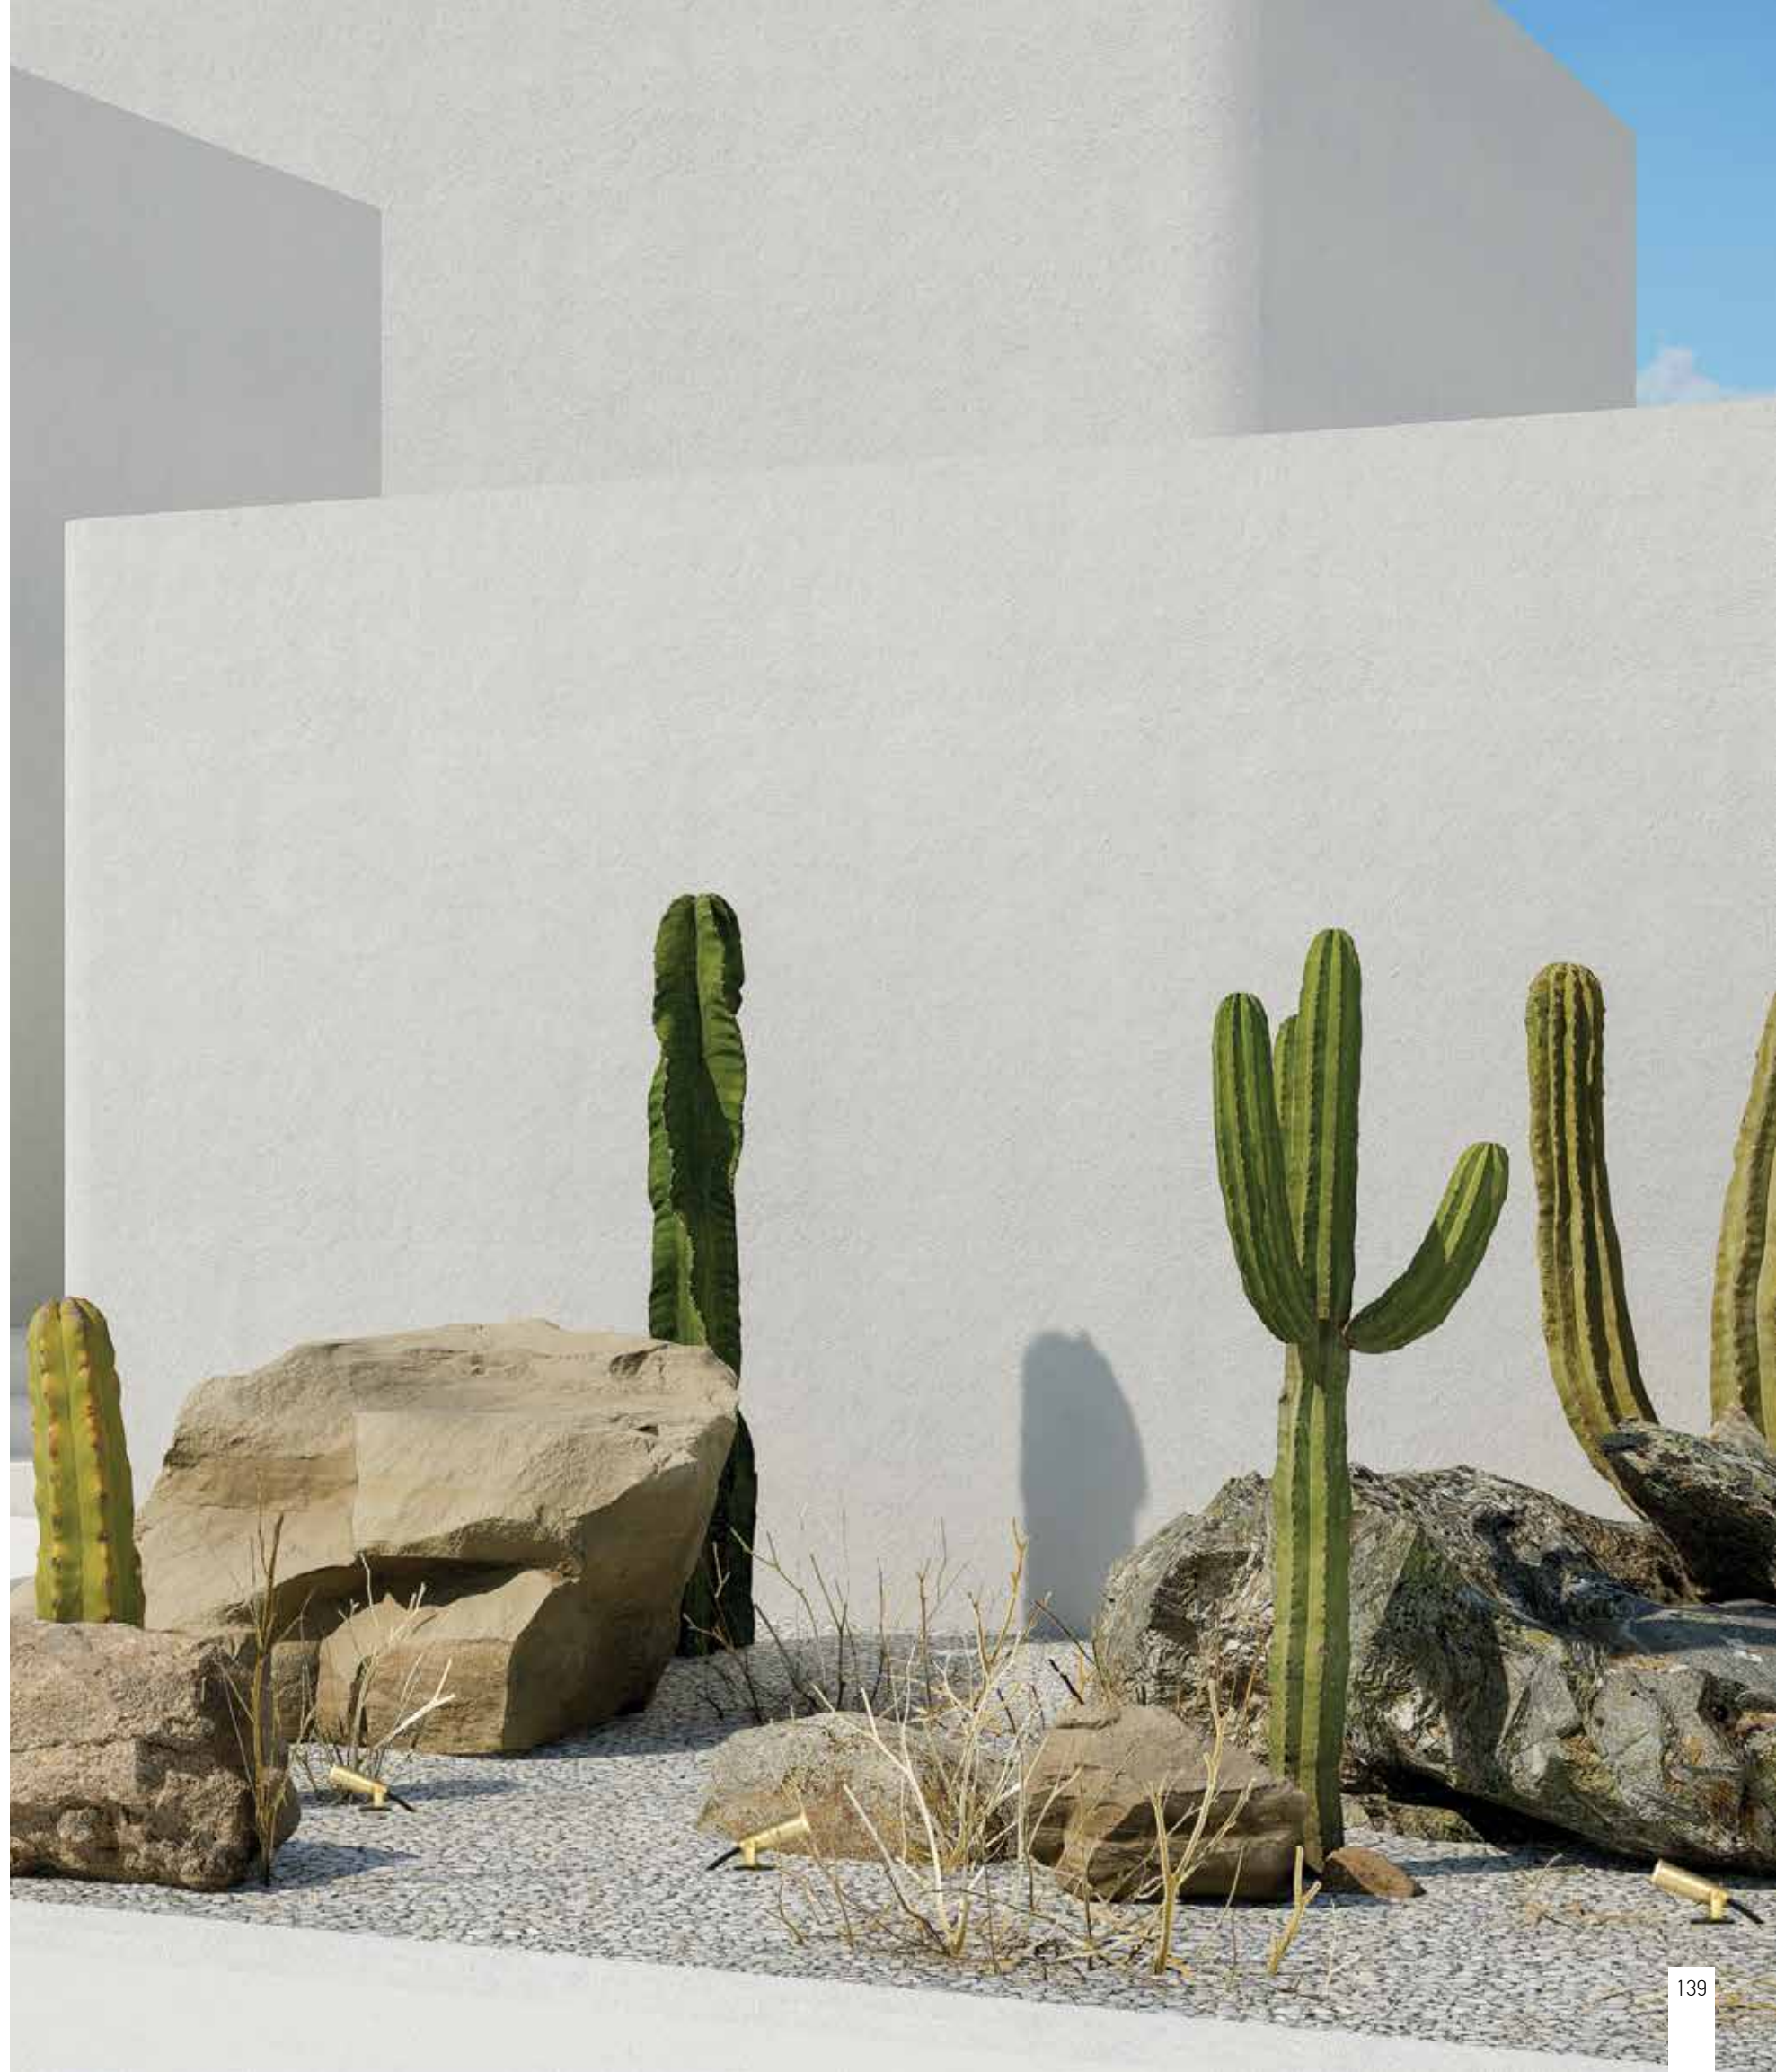

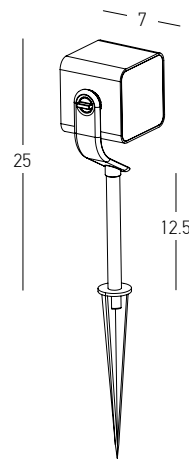

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 740Lm
 Cri 80
 IP 65
 Dimensions L: 7cm W: 7cm H: 25cm
 Base Ø: 6cm H: 0.5cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable Spot
 Spike & Base Included
 Waterproof Connector Included


Color Graphite / **Code E286**

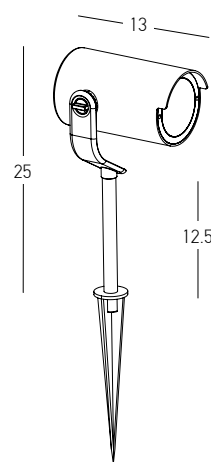

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 740Lm
 Cri 80
 IP 65
 Dimensions Ø: 7.5cm L: 13cm H: 25cm
 Base Ø: 6cm H: 0.5cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable Spot
 Spike & Base Included
 Waterproof Connector Included


Color Graphite / **Code E285**



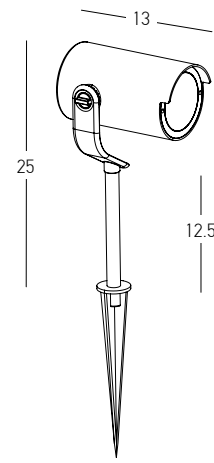


Bulb 1x GU10
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 7.5cm L: 13cm H: 25cm
 Base Ø: 6cm H: 0.5cm
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable Spot
 Spike & Base Included
 Waterproof Connector Included
 Color Dark Brown / Code E284



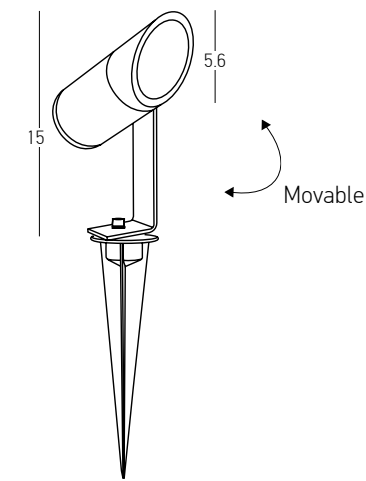

Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 516Lm
 Cri 80
 IP 65
 Dimensions Ø: 5.6cm H: 15cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 20cm Cable Available
 Movable Spot
 Spike Included


Color Graphite / **Code E152**

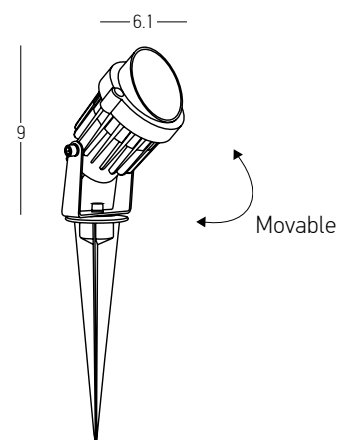


Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 380Lm
 Cri 80
 IP 65
 Dimensions Ø: 6.1cm H: 9cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 20cm Cable Available
 Movable Spot
 Spike Included

Color Graphite / **Code E153**



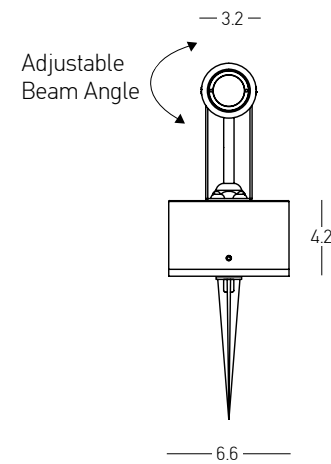

Power 2.1W
 Input 220-240V, 50/60Hz
 Color Temperature 2700K
 Lumen 168Lm
 Cri 80
 IP 54
 Dimensions L: 8cm H: 8.5cm
 Base Ø: 6.6cm H: 4.2cm
 Beam Angle 10°-60°
 Material Aluminium - Stainless Steel
 Special Feature 60cm Cable Available
 Stick Ø: 3.2cm H: 8cm
 Spike Included
 Color Sandy Black / **Code E177-B**

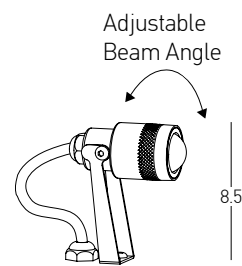



Power 2.1W
 Input 3V , 700mA
 Color Temperature 2700K
 Lumen 168Lm
 Cri 80
 IP 54
 Dimensions L: 8cm H: 8.5cm
 Beam Angle 10-60°
 Material Aluminium - Stainless Steel
 Special Feature 60cm Cable Available
 Stick Ø: 3.2cm H: 8cm
 Spike Included
 Recommended Driver V350-1050 (Not Included)
 In Series Connection 1-10 pcs
 Color Sandy Black / **Code E177-A**



Driver
 Power 34W
 Input 220-240V, 50/60Hz
 Output 2 - 32V
 Dimensions L: 15cm W: 4cm H: 3cm
 IP 20


V350-1050

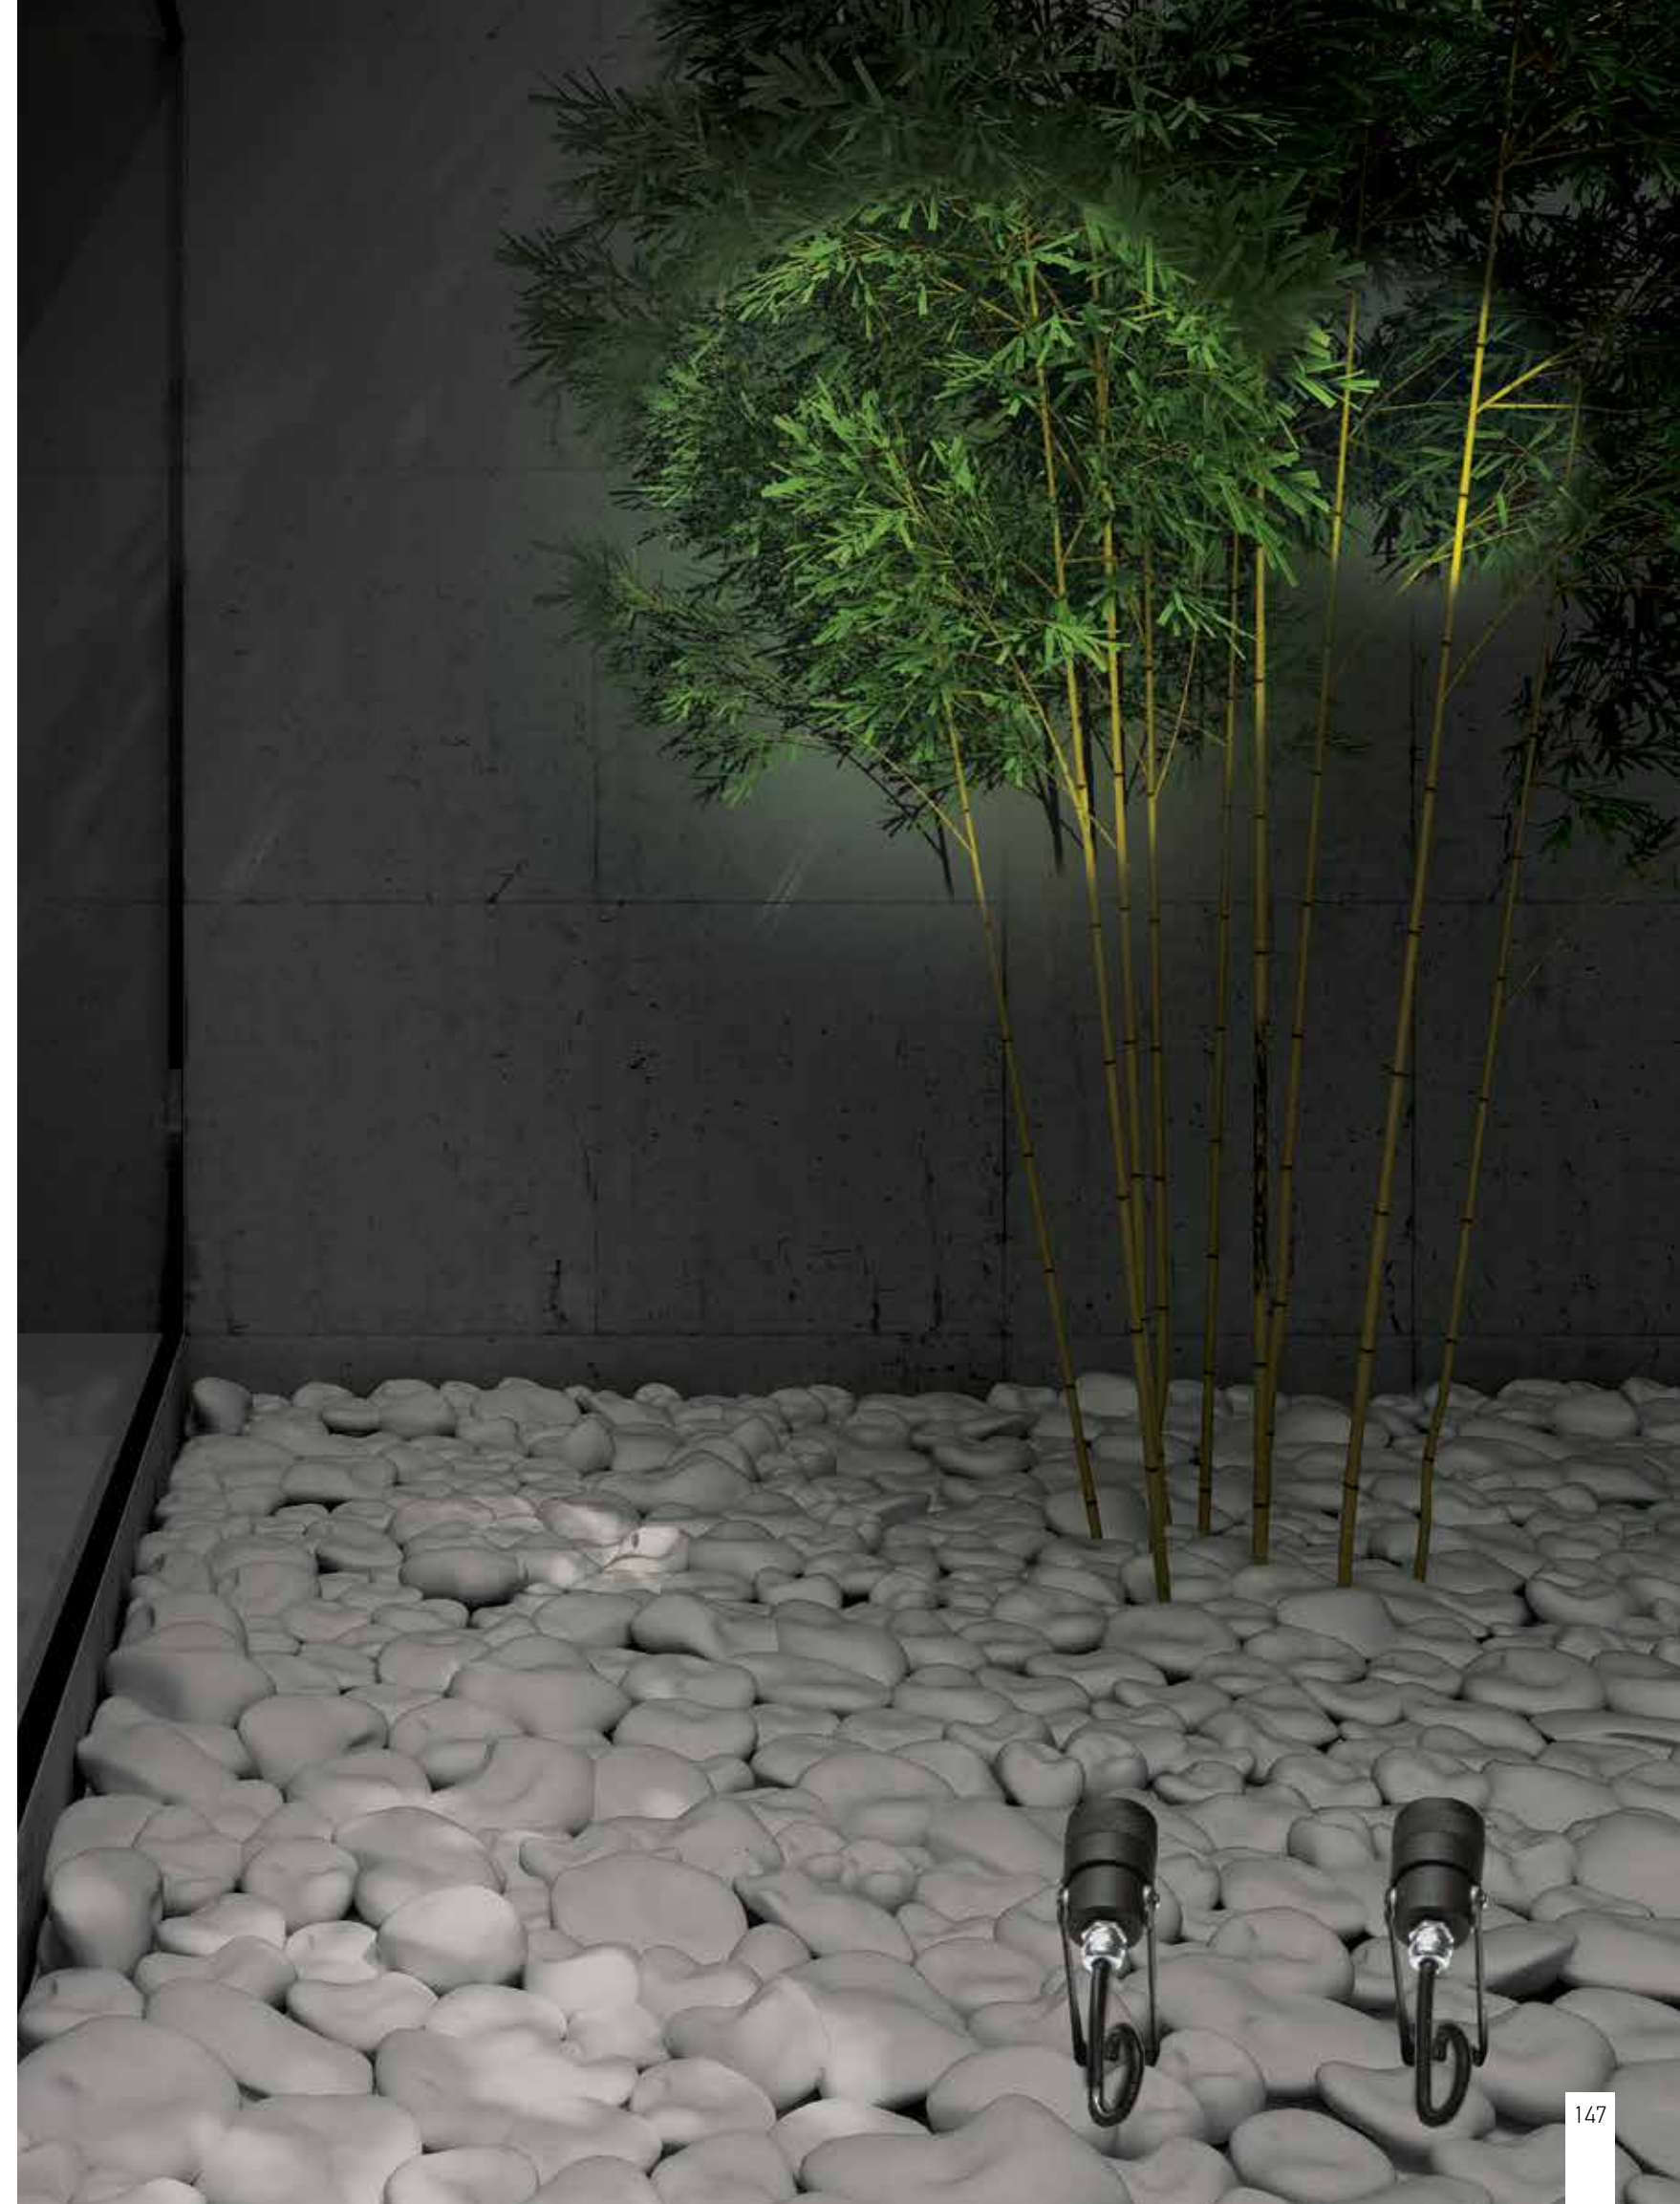

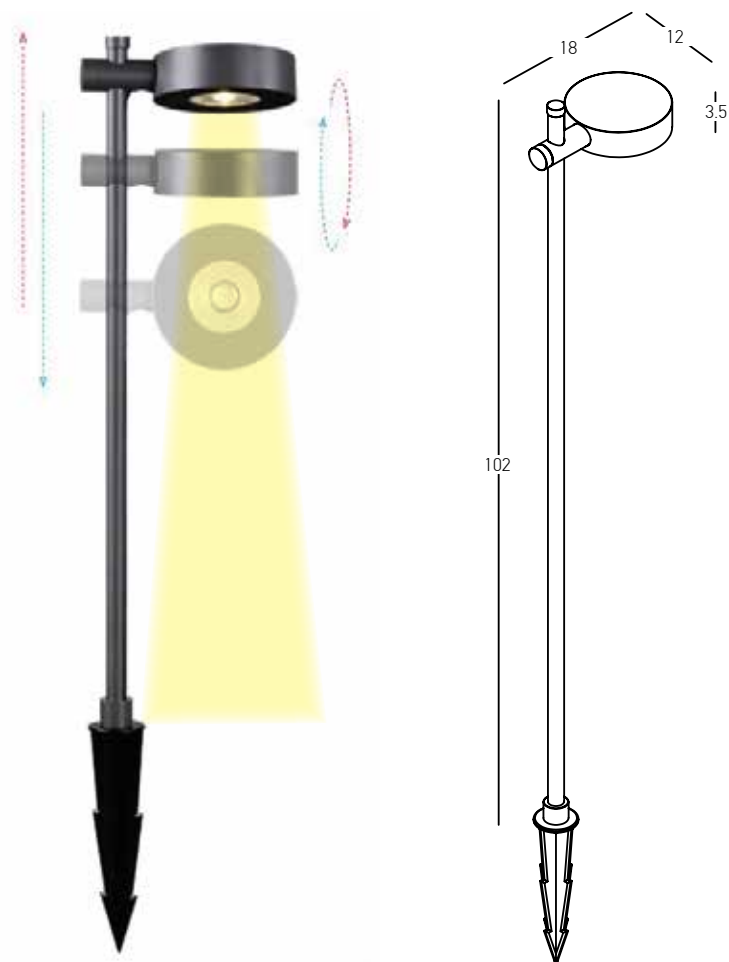

Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 522Lm
 Cri 90
 IP 65
 Dimensions L: 18cm W: 12cm H: 102cm
 Base Ø: 10.5cm H: 1cm
 Shade Dimensions Ø: 12cm H: 3.5cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable - Rotational Spot
 Spike & Base Included


Color Graphite / **Code E292**

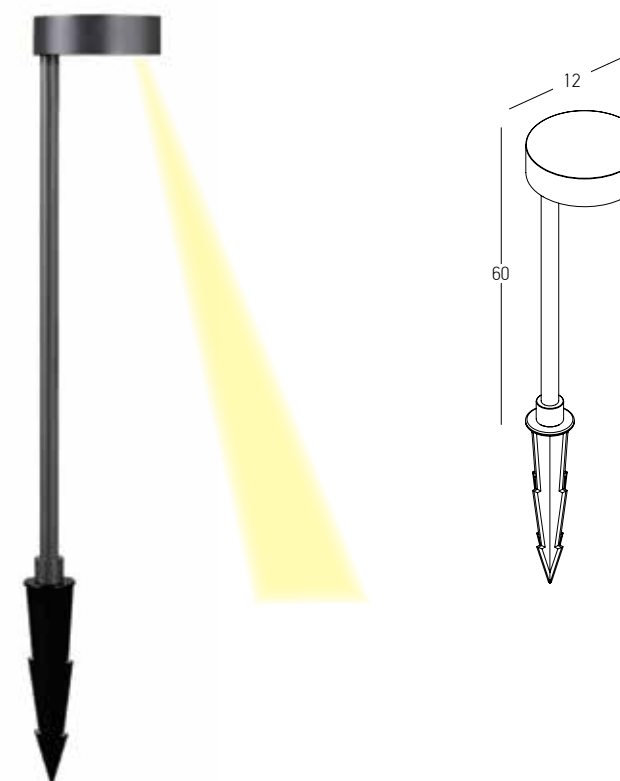

Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 629Lm
 Cri 90
 IP 65
 Dimensions Ø: 12cm H: 63.5cm
 Base Ø: 10.5cm H: 1cm
 Shade Dimensions Ø: 12cm H: 3.5cm
 Material Aluminium - Tempered Glass
 Special Feature 50cm Cable Available
 Asymmetric Beam Angle
 Spike & Base Included


Color Graphite / **Code E293**



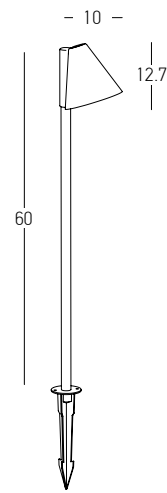

Bulb 1x GU10
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 10cm W: 10cm H: 60cm
 Material Aluminium - Tempered Glass
 Special Feature 50cm Cable Available
 Spike Included
 Recommended Base E282-SP / Not Included

Color Graphite / **Code E281**

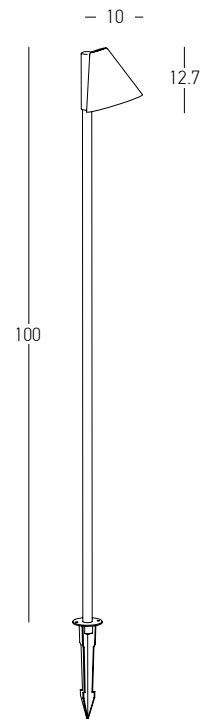

Bulb 1x GU10
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 10cm W: 10cm H: 100cm
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Spike Included
 Recommended Base E282-SP / Not Included


Color Graphite / **Code E282**



Base for E281 - E282
 Dimensions Ø: 9.5cm H: 2cm
 Material Aluminium


Color Graphite / **Code E282-SP**



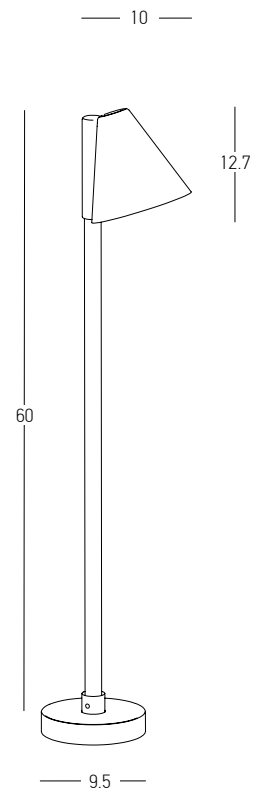


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 522Lm
 Cri 80
 IP 65
 Dimensions L: 10cm W: 10cm H: 60cm
 Base Ø: 9.5cm H: 2cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 50cm Cable Available
 Spike & Base Included
 Color Graphite / **Code E283**



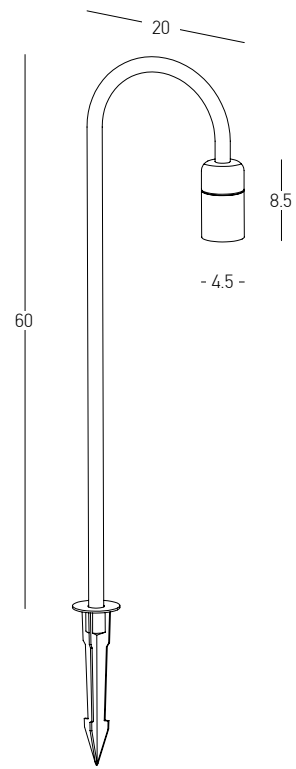


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 500Lm
Cri 80
IP 65
Dimensions L: 20cm W: 4.5cm H: 60cm
Beam Angle 40°
Material Aluminium - Tempered Glass
Special Feature 40cm Cable Available
Spike Included
Color Dark Brown / **Code E279**




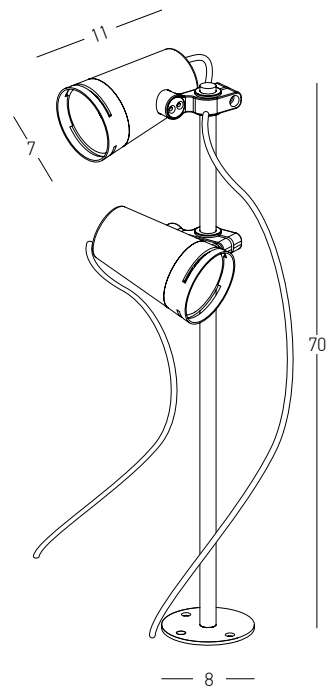

Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1162Lm
 Cri 90
 IP 54
 Dimensions L: 11cm W: 11cm H: 70cm
 Base Ø: 8cm H: 0.5cm
 Beam Angle 40°
 Spots Ø: 5-7cm L: 11cm
 Material Aluminium - Tempered Glass
 Special Feature 110cm Cable Available (2 pcs)
 Movable - Rotational Spots
 Base Included


Color Dark Brown / Code E299

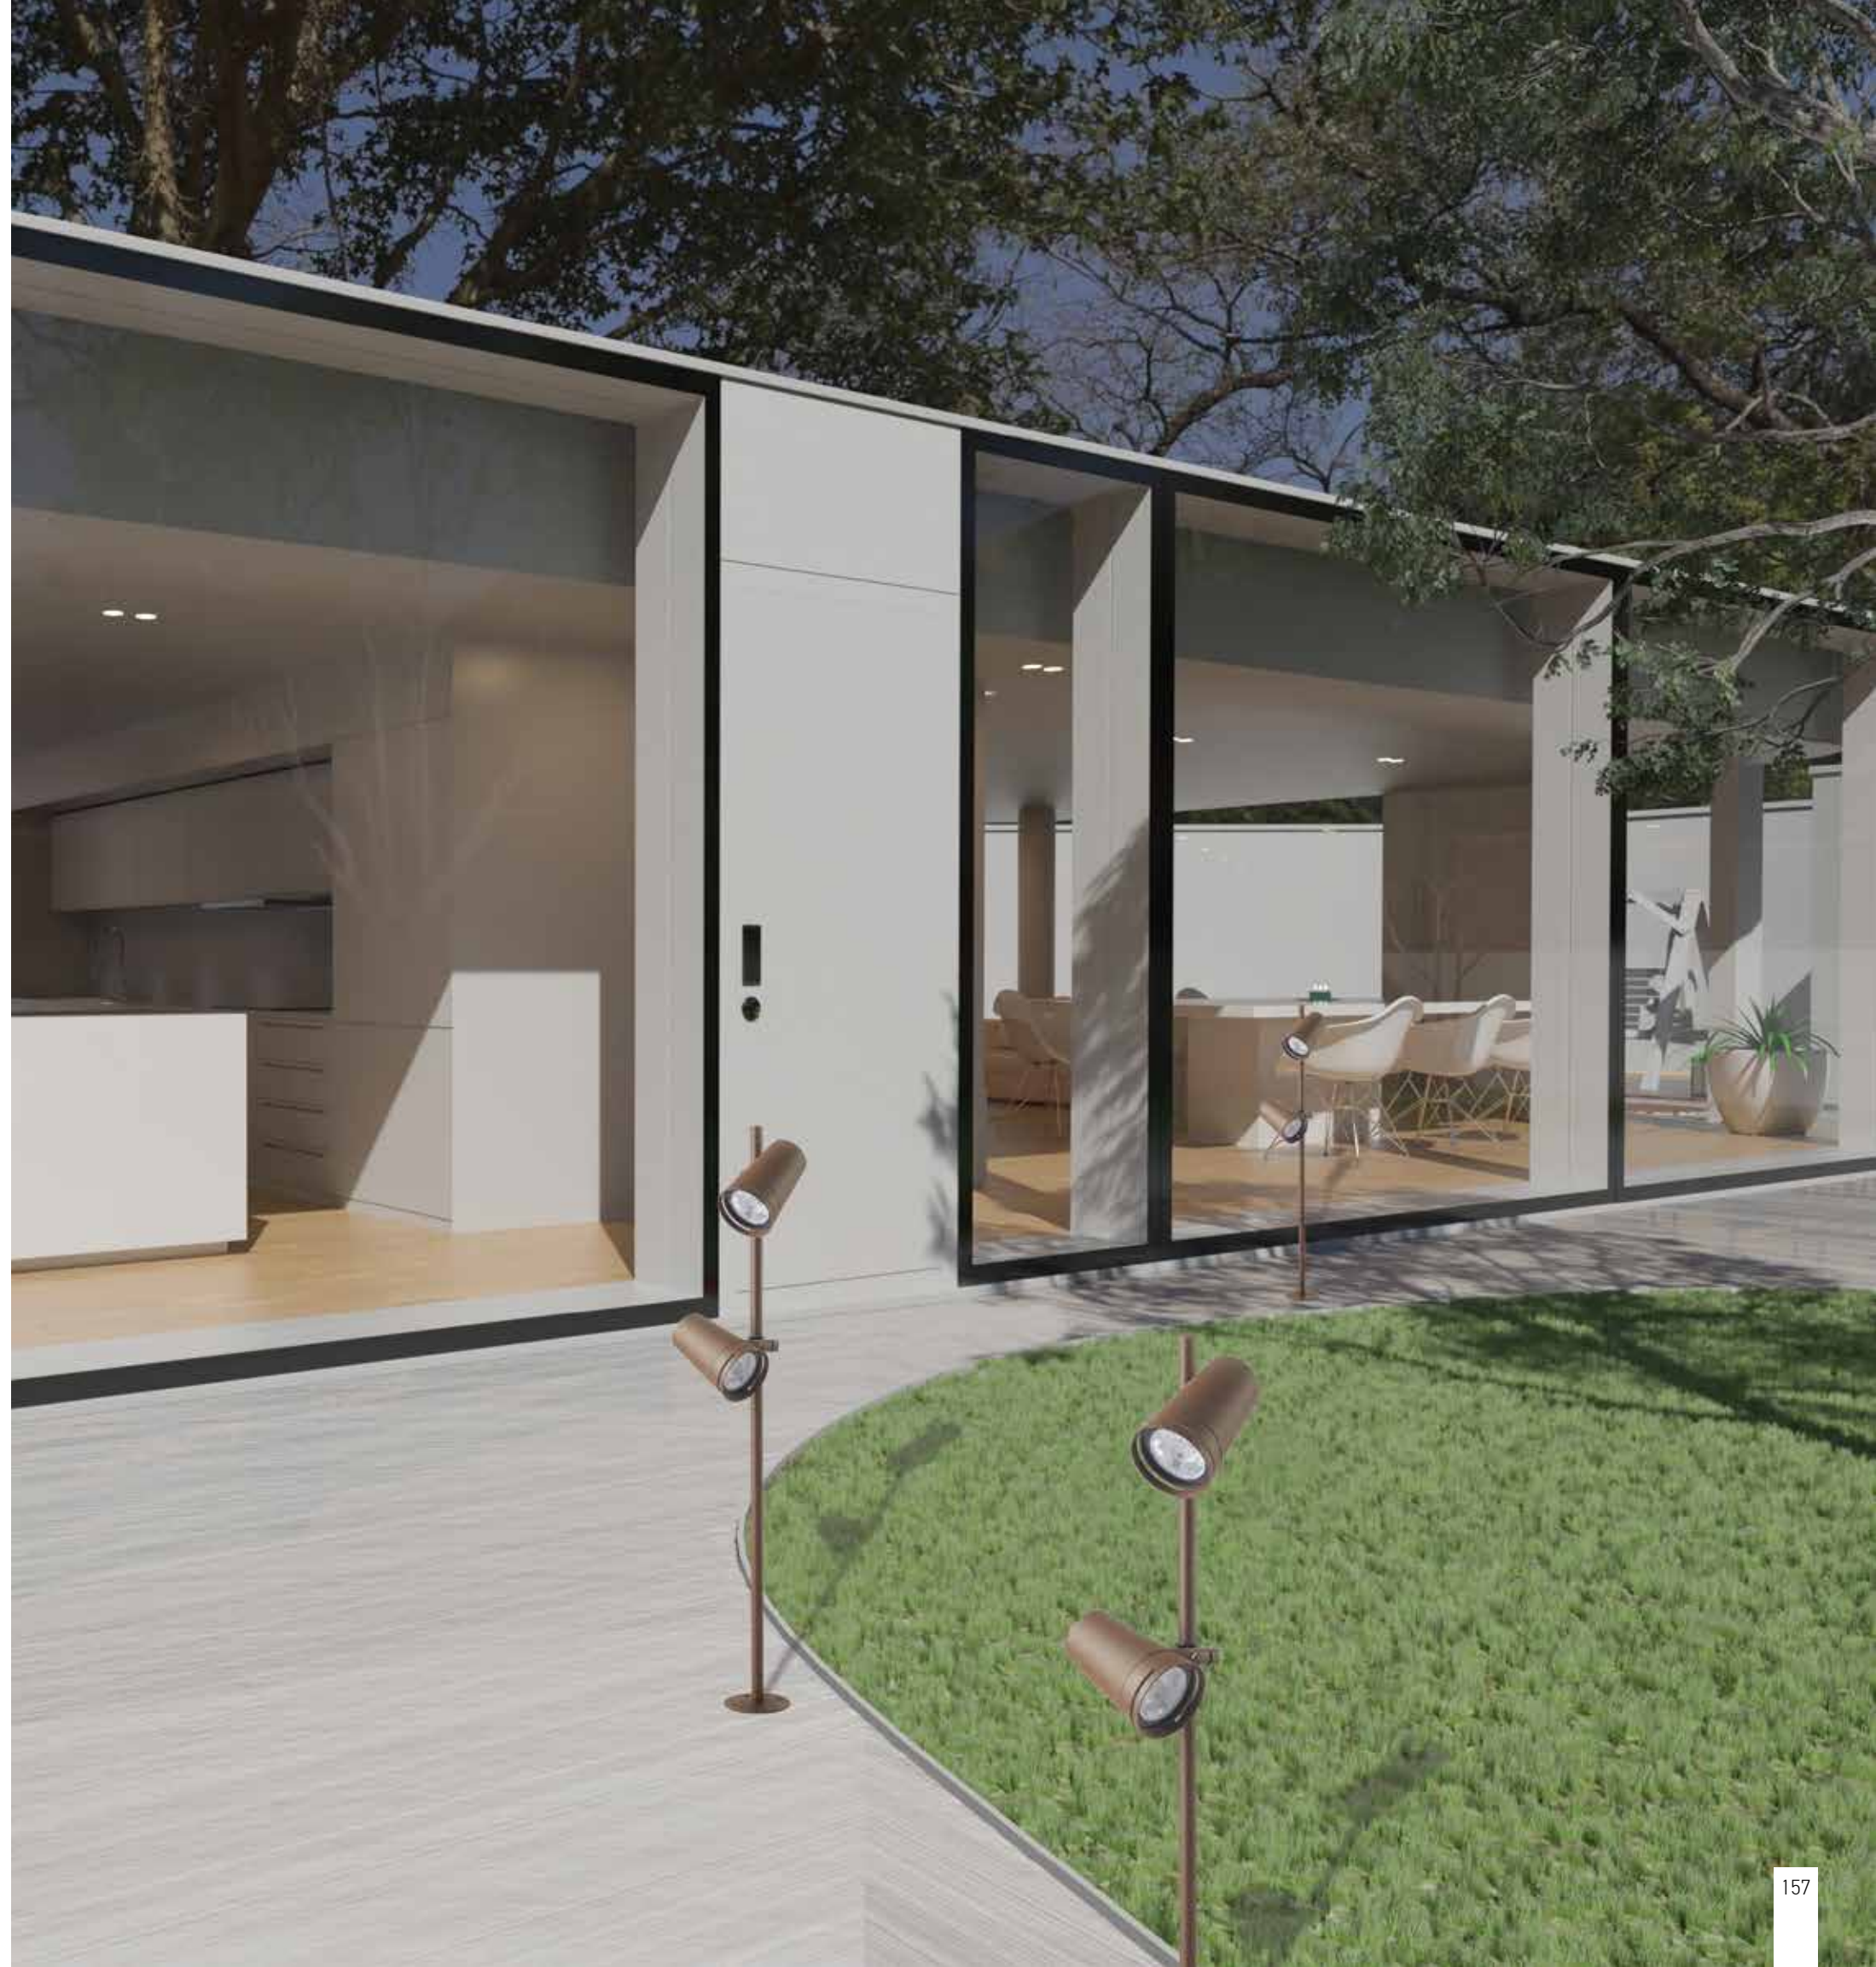


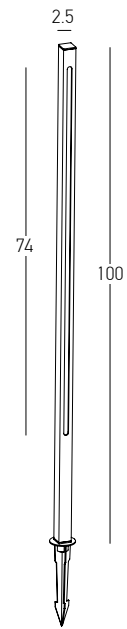


Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1550Lm
Cri 80
IP 65
Dimensions L: 2.5cm W: 2.5cm H: 100cm
Base Ø: 9.5cm H: 2cm
Material Aluminium - Opal PC Diffuser
Special Feature 40cm Cable Available
Spike & Base Included
Profile 2.5 x 2.5cm

Color Dark Brown / **Code E280**

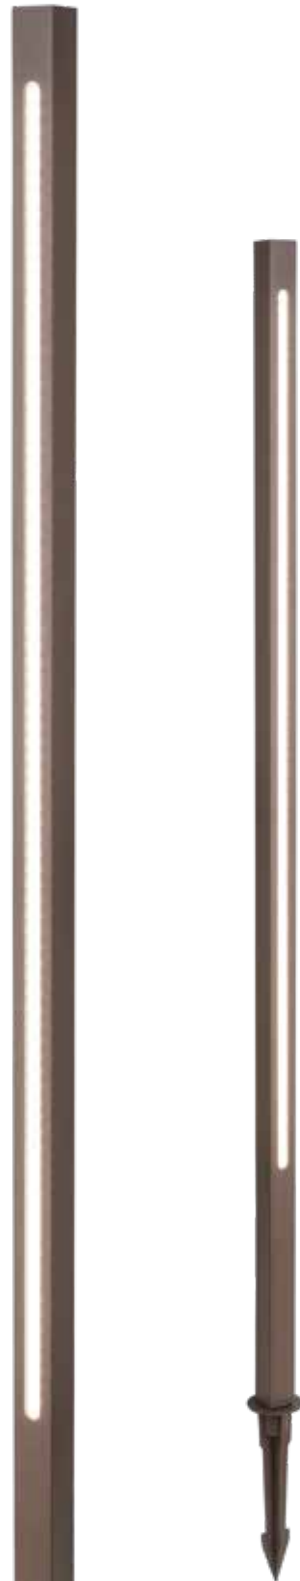

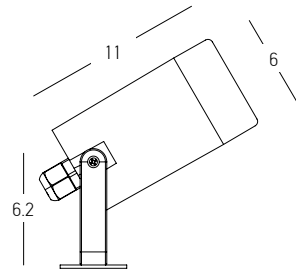


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 6cm L: 11cm H: 6.2cm
 Material ABS - PC Diffuser
 Special Feature 30cm Cable Available
 Movable Spot
 Without Spike
 Color Black / **Code E311**

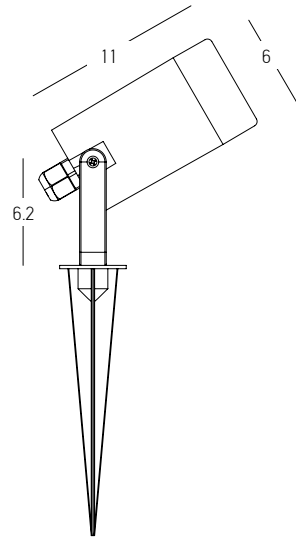


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 6cm L: 11cm H: 6.2cm
 Material ABS - PC Diffuser
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Color Black / **Code E312**



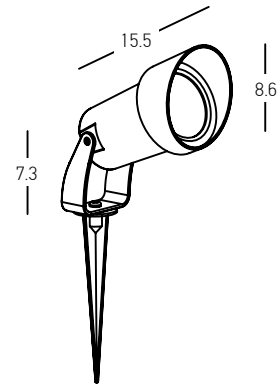


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 8.6cm L: 15.5cm H: 7.3cm
 Material ABS - Tempered Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Color Black / **Code E310**




Bulb 1x GU10 LED
 Power 5W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 6cm H: 16cm
 Material ABS - PC Diffuser
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Color Black / **Code E217**




STEP | p.164-185

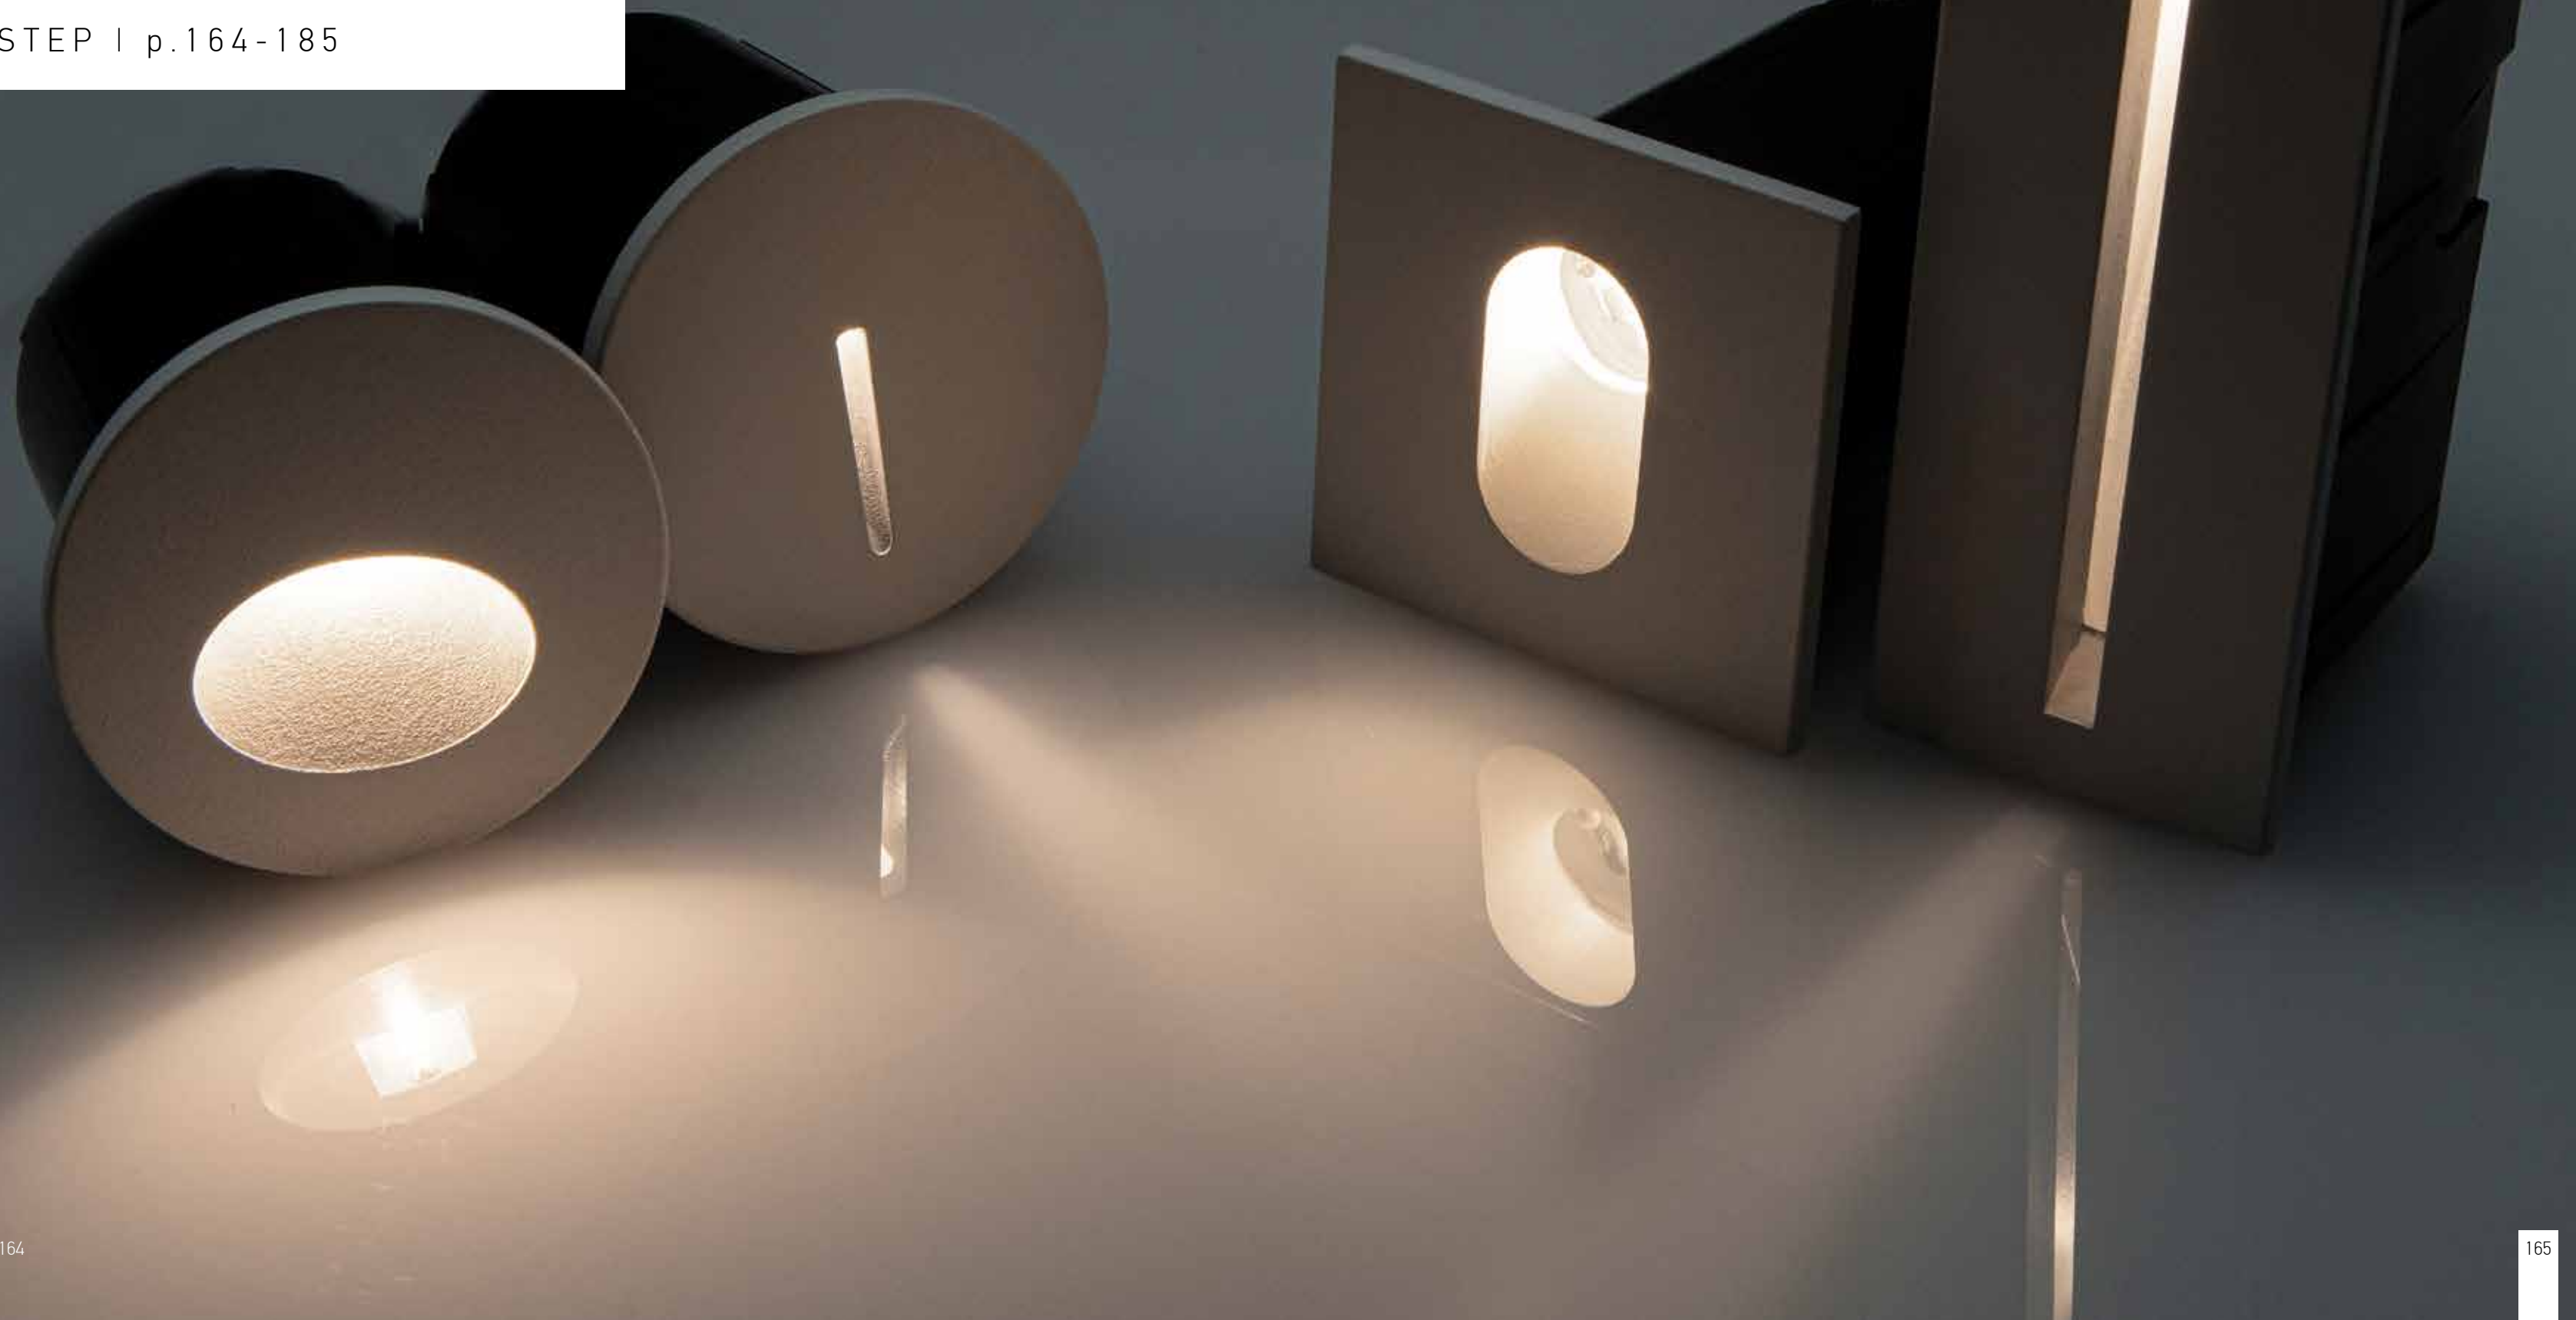


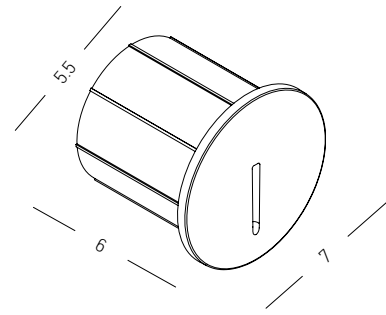


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 92Lm
 Cri 90
 IP 65
 Dimensions Ø: 7cm L: 6.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy White / **Code E321**

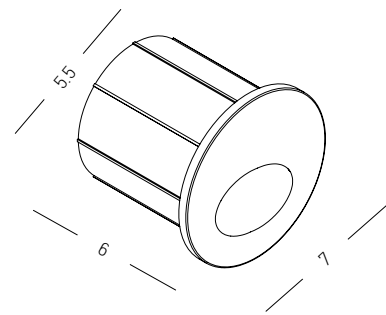


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 133Lm
 Cri 90
 IP 65
 Dimensions Ø: 7cm L: 6.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy White / **Code E320**

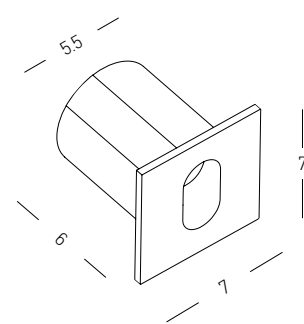



Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 133Lm
 Cri 90
 IP 65
 Dimensions L: 7.5cm W: 7cm H: 7cm
 Material Aluminium - Tempered Glass
 Depth Required 7cm
 Recessed Mounting Box Ø: 5.5cm L: 7cm (Included)
 Color Sandy White / **Code E319**

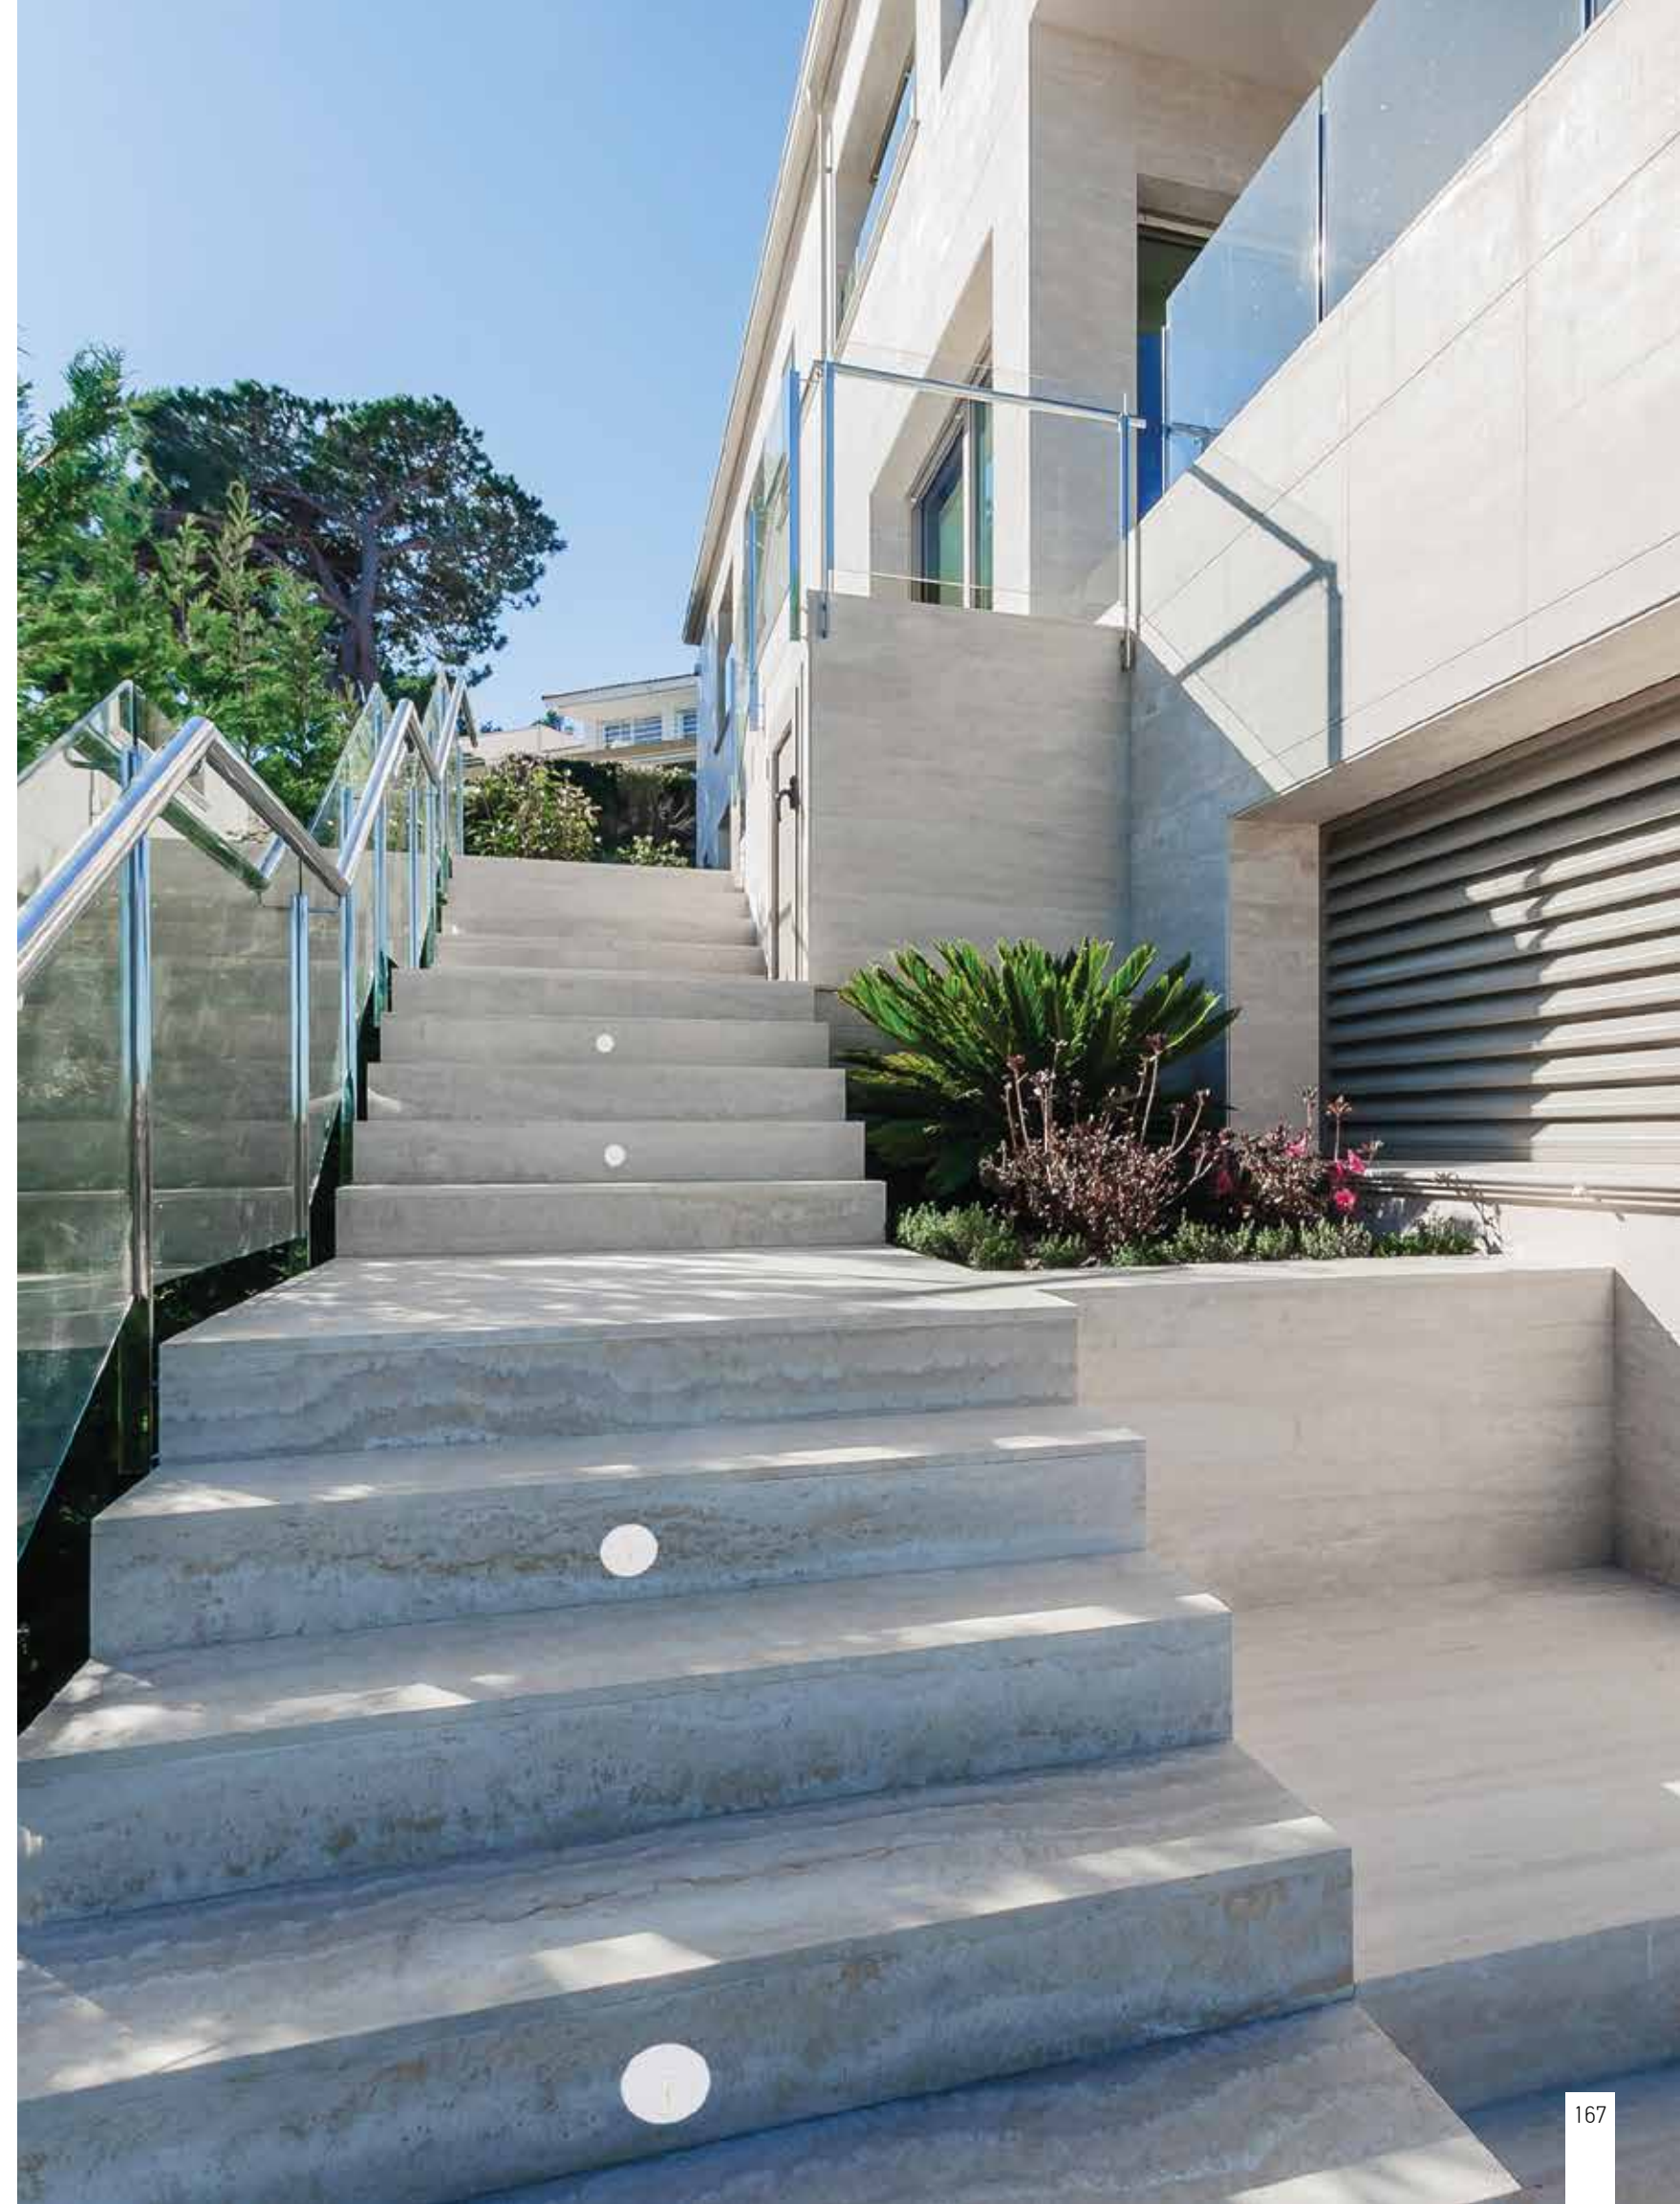

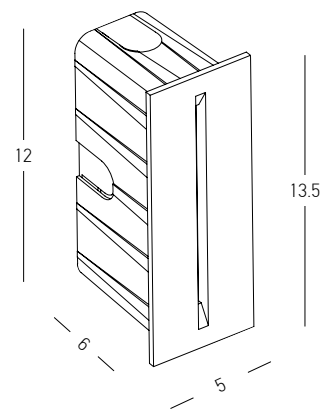


Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	92Lm
Cri	90
IP	65
Dimensions	L: 6.5cm W: 5cm H: 13.5cm
Material	Aluminium - Tempered Glass
Depth Required	6cm
Recessed Mounting Box	L: 6cm W: 4.3cm H: 12.6cm (Included)
Color	Sandy White / Code E322

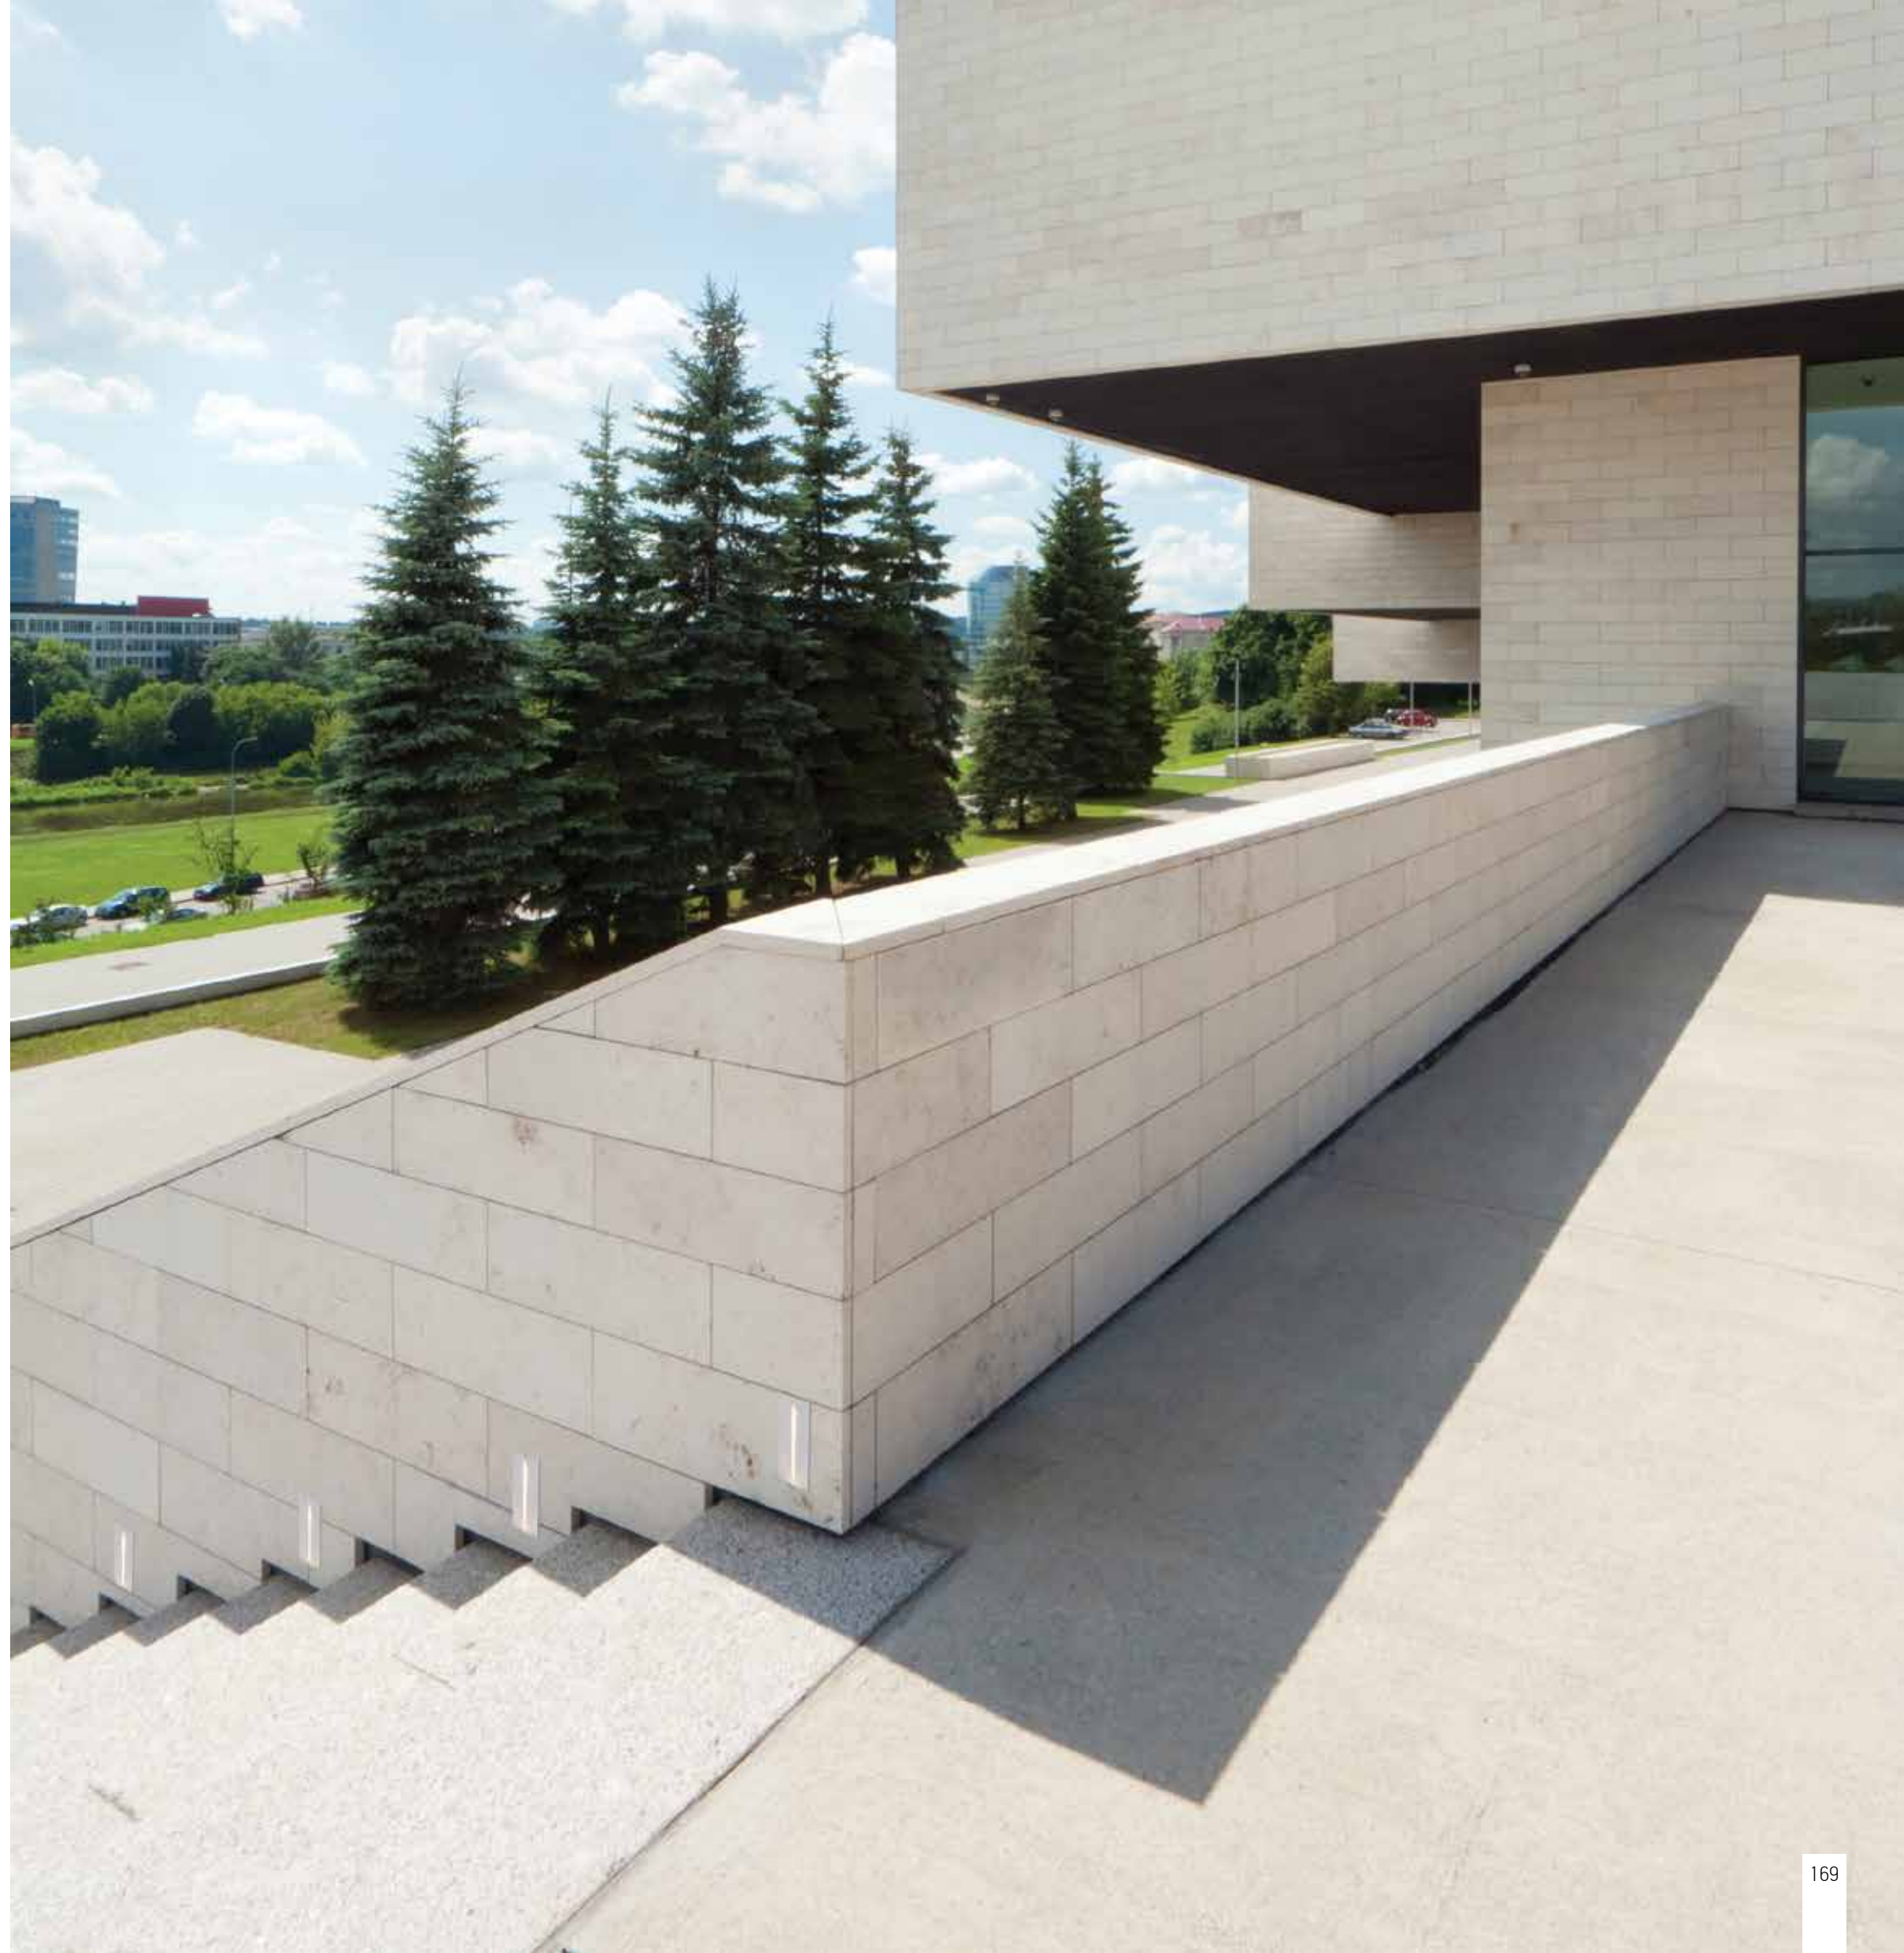


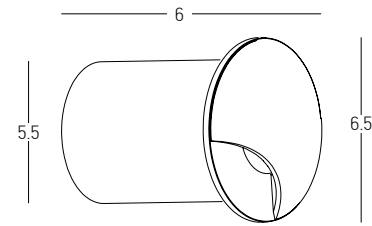


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 230Lm
 Cri 90
 IP 65
 Dimensions Ø: 6.5cm L: 6cm
 Material Aluminium - PC Diffuser
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy Black / **Code E300**

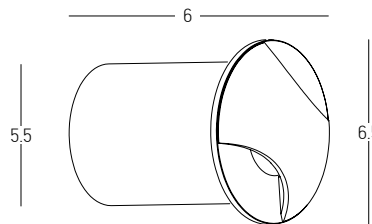


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 290Lm
 Cri 90
 IP 65
 Dimensions Ø: 6.5cm L: 6cm
 Material Aluminium - PC Diffuser
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy Black / **Code E301**

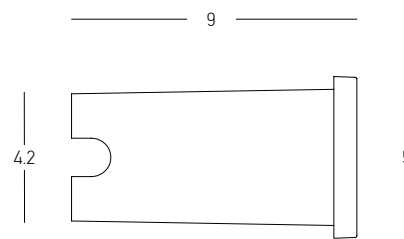


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 200Lm
 Cri 80
 IP 65
 Dimensions Ø: 5cm L: 9cm
 Material Stainless Steel- PC Diffuser
 Depth Required 8cm
 Recessed Mounting Box Ø: 4.2cm L: 8cm (Included)
 Color Stainless Steel / **Code E288**

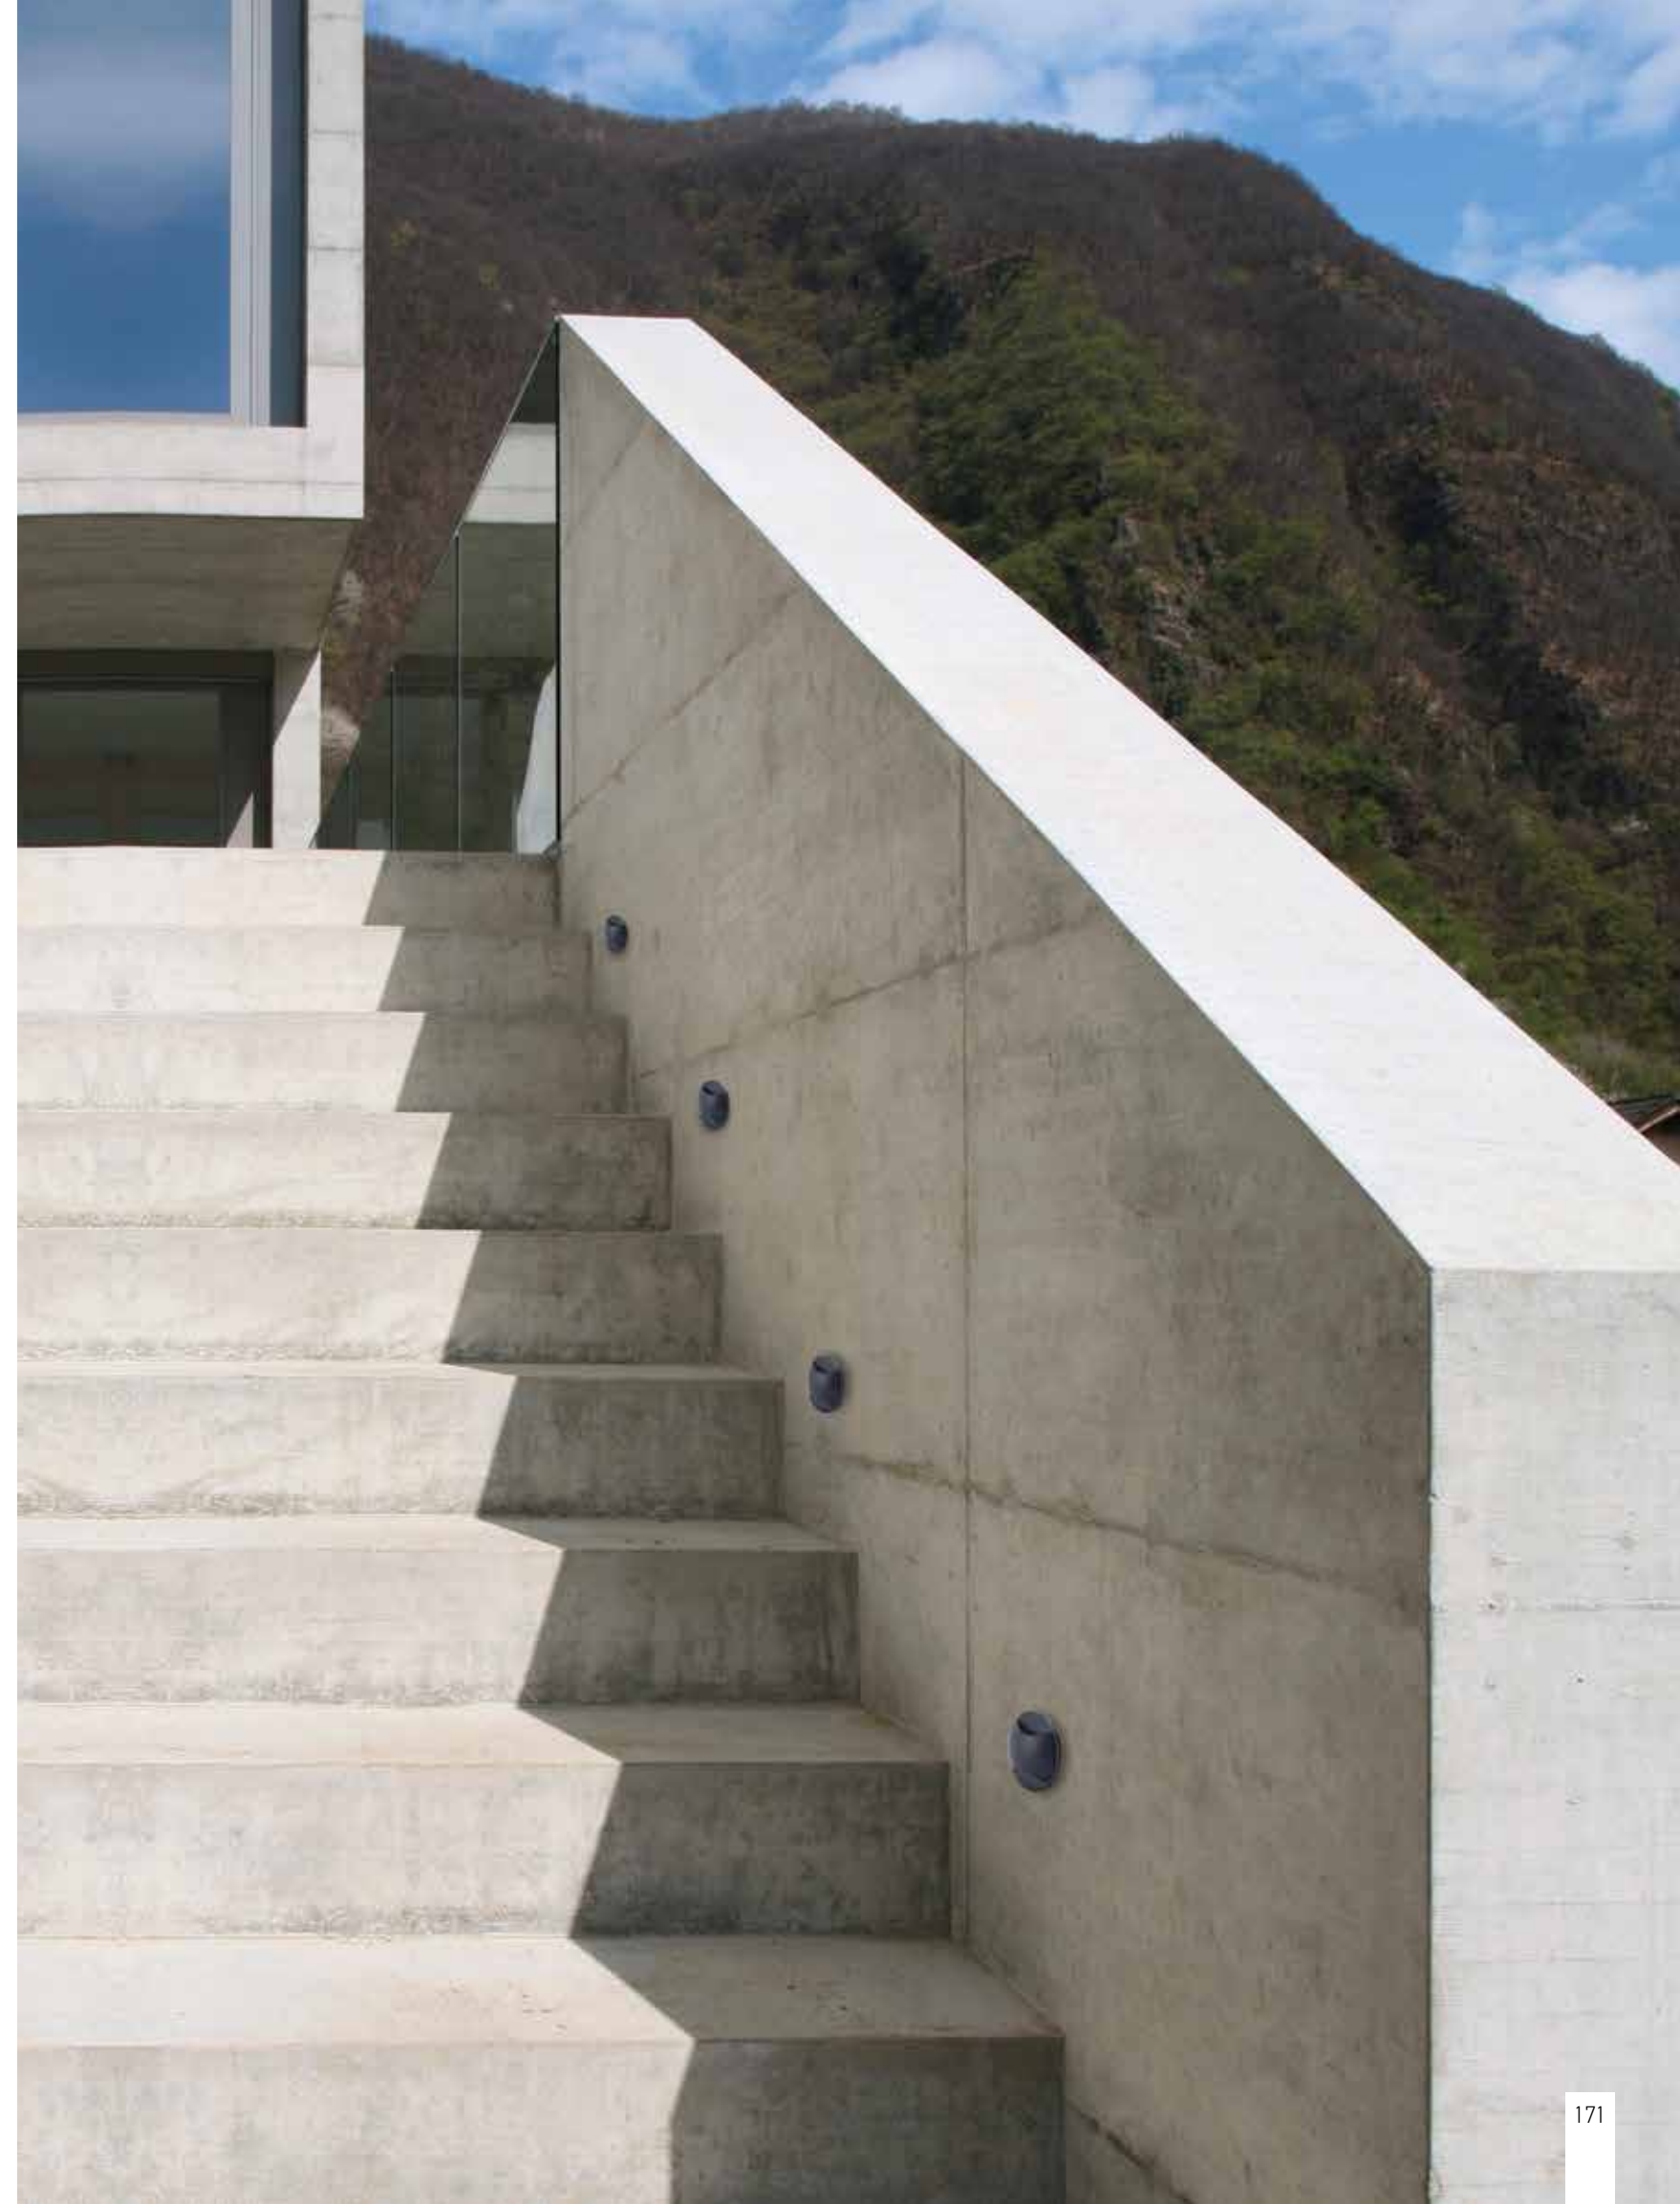

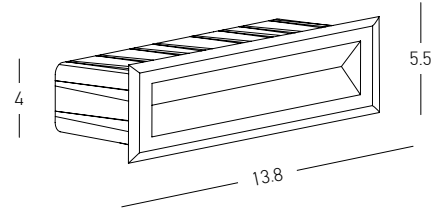



Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 302Lm
 Cri 80
 IP 65
 Dimensions L: 6.5cm W: 13.8cm H: 5.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box L: 6cm W: 13cm H: 4cm (Included)
 Color Graphite / **Code E324**

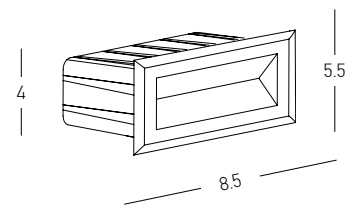


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 195Lm
 Cri 80
 IP 65
 Dimensions L: 6.5cm W: 8.5cm H: 5.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box L: 6cm W: 8cm H: 4cm (Included)

Color Graphite / **Code E323**

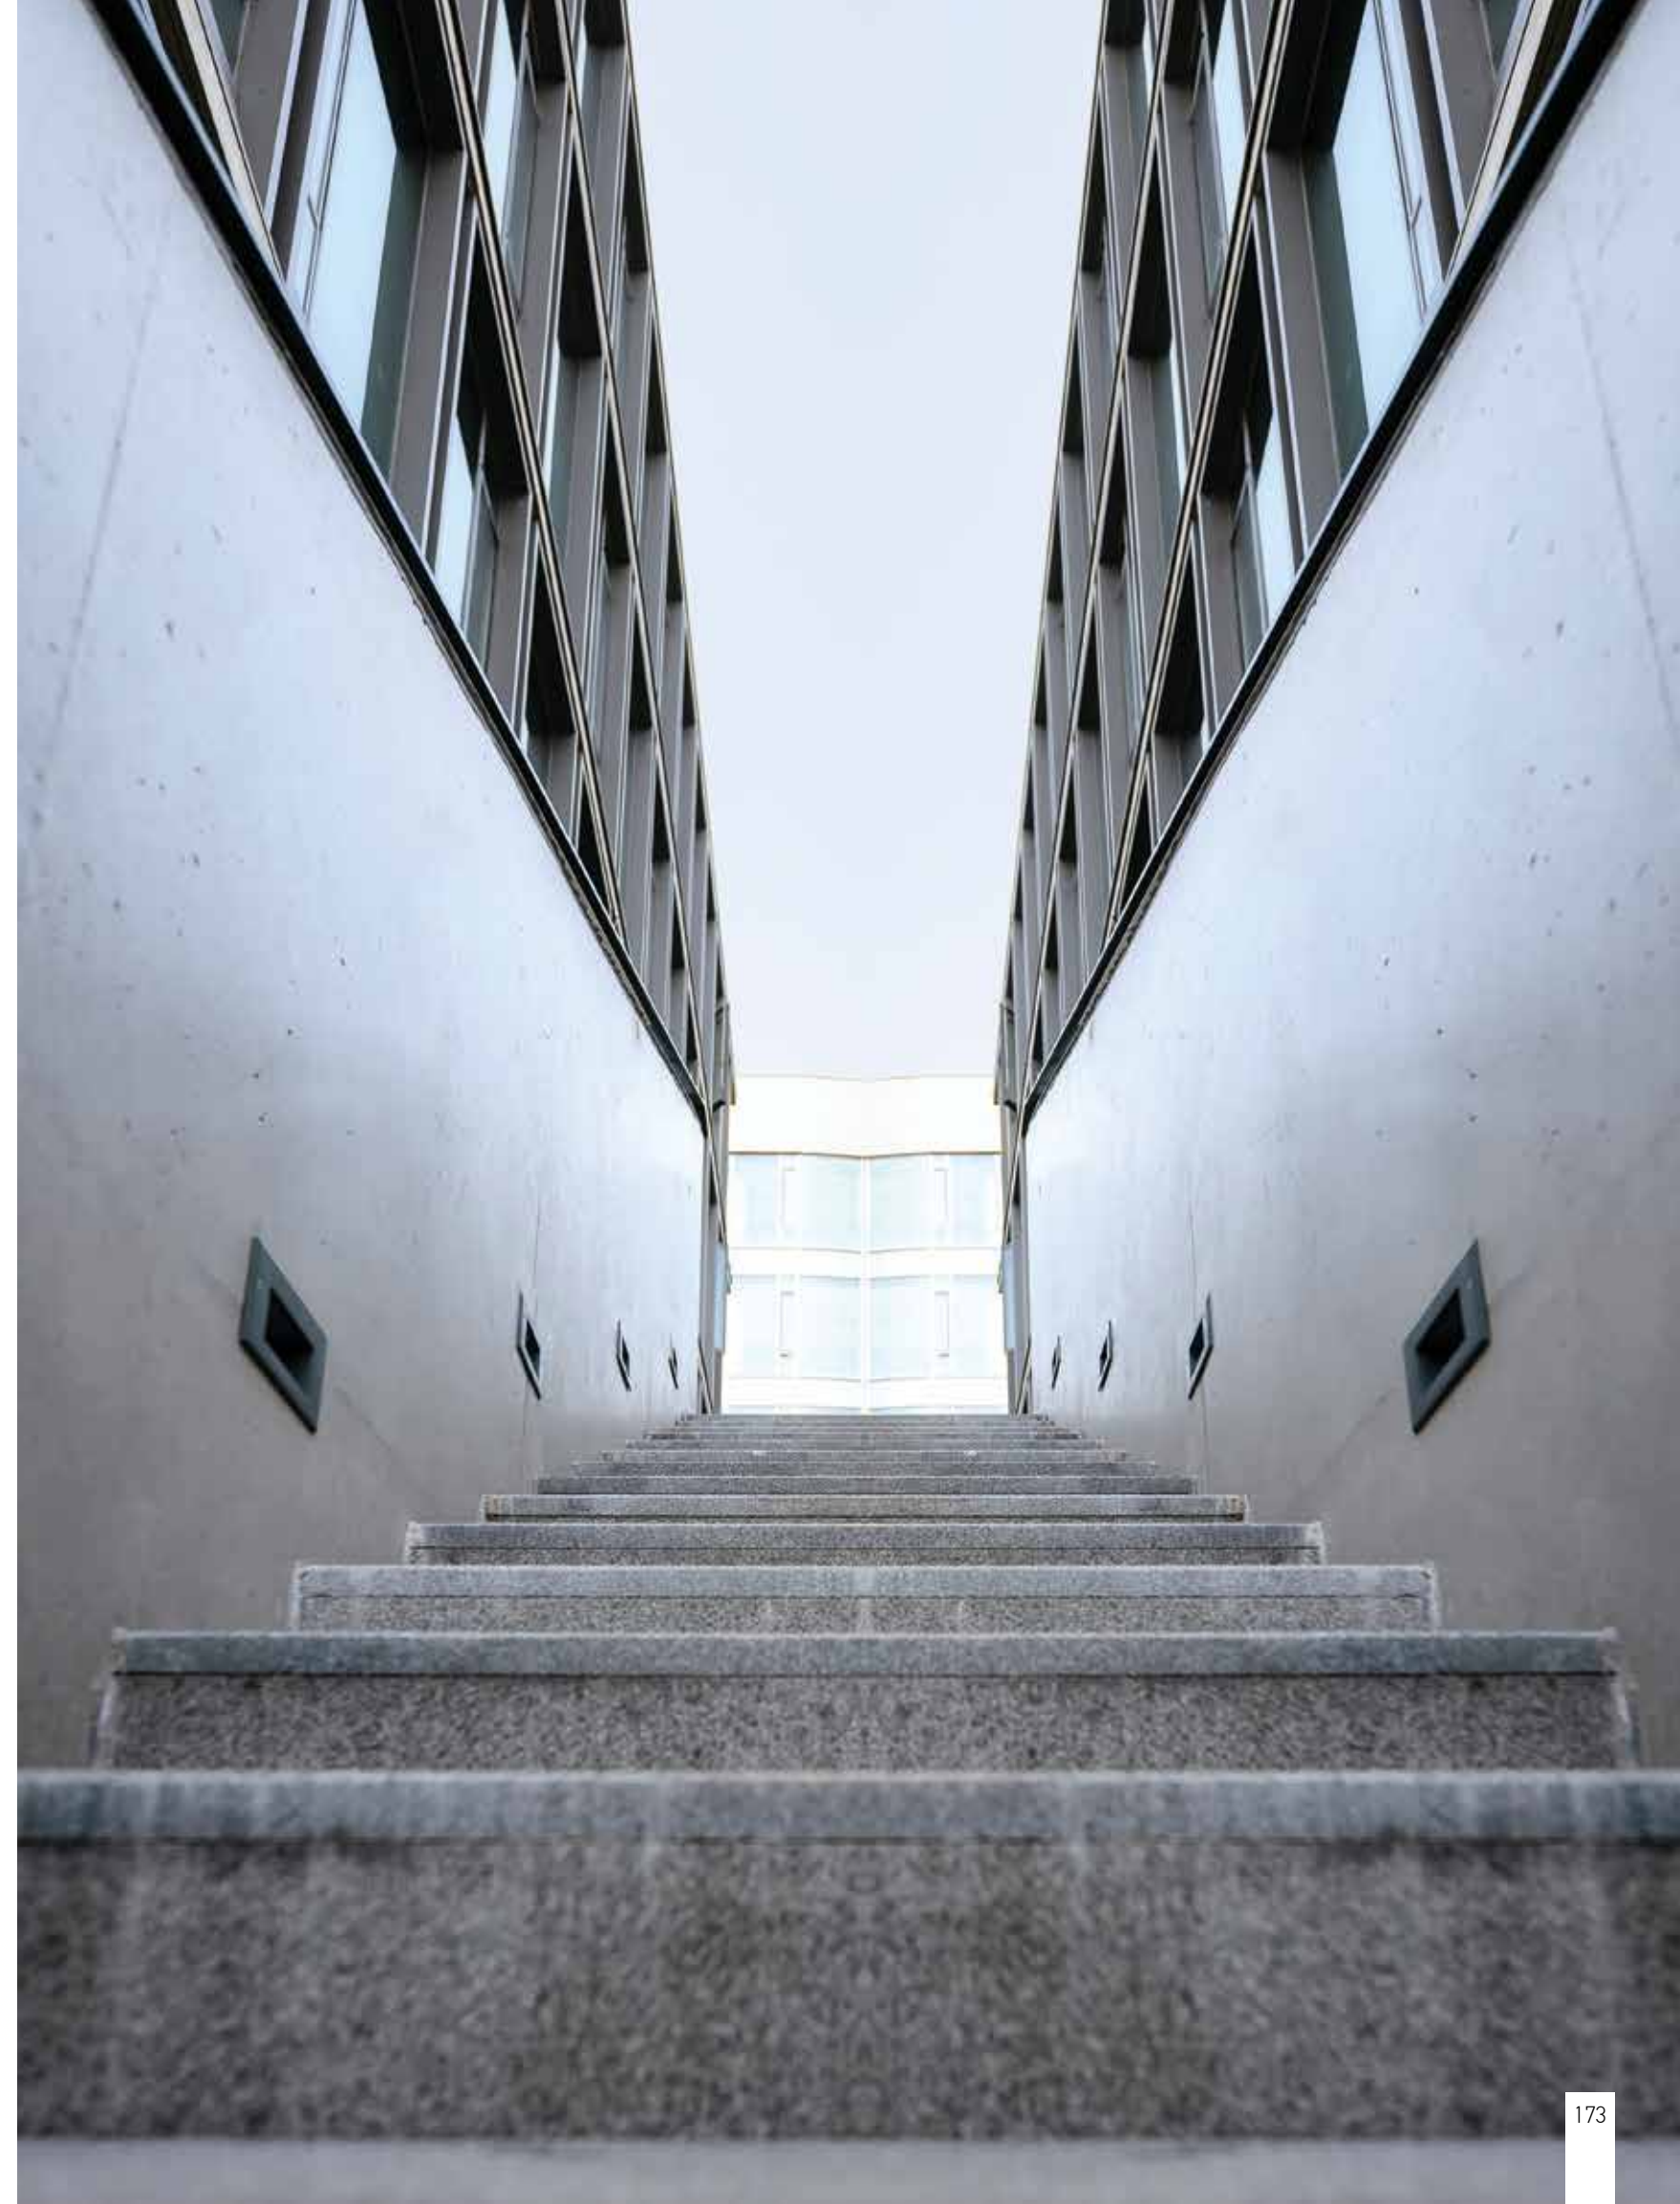


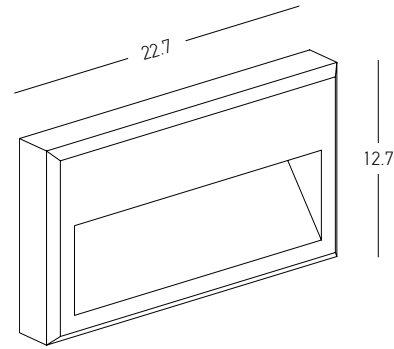


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 420Lm
 Cri 80
 IP 65
 Dimensions L: 3.5cm W: 22.7cm H: 12.7cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E347**

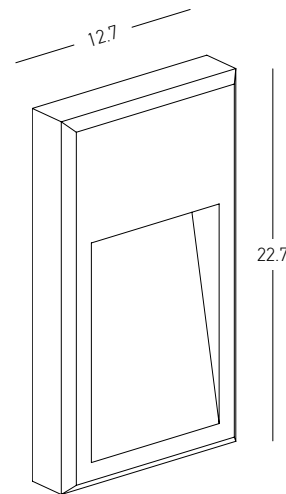


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 420Lm
 Cri 80
 IP 65
 Dimensions L: 3.5cm W: 12.7cm H: 22.7cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E346**

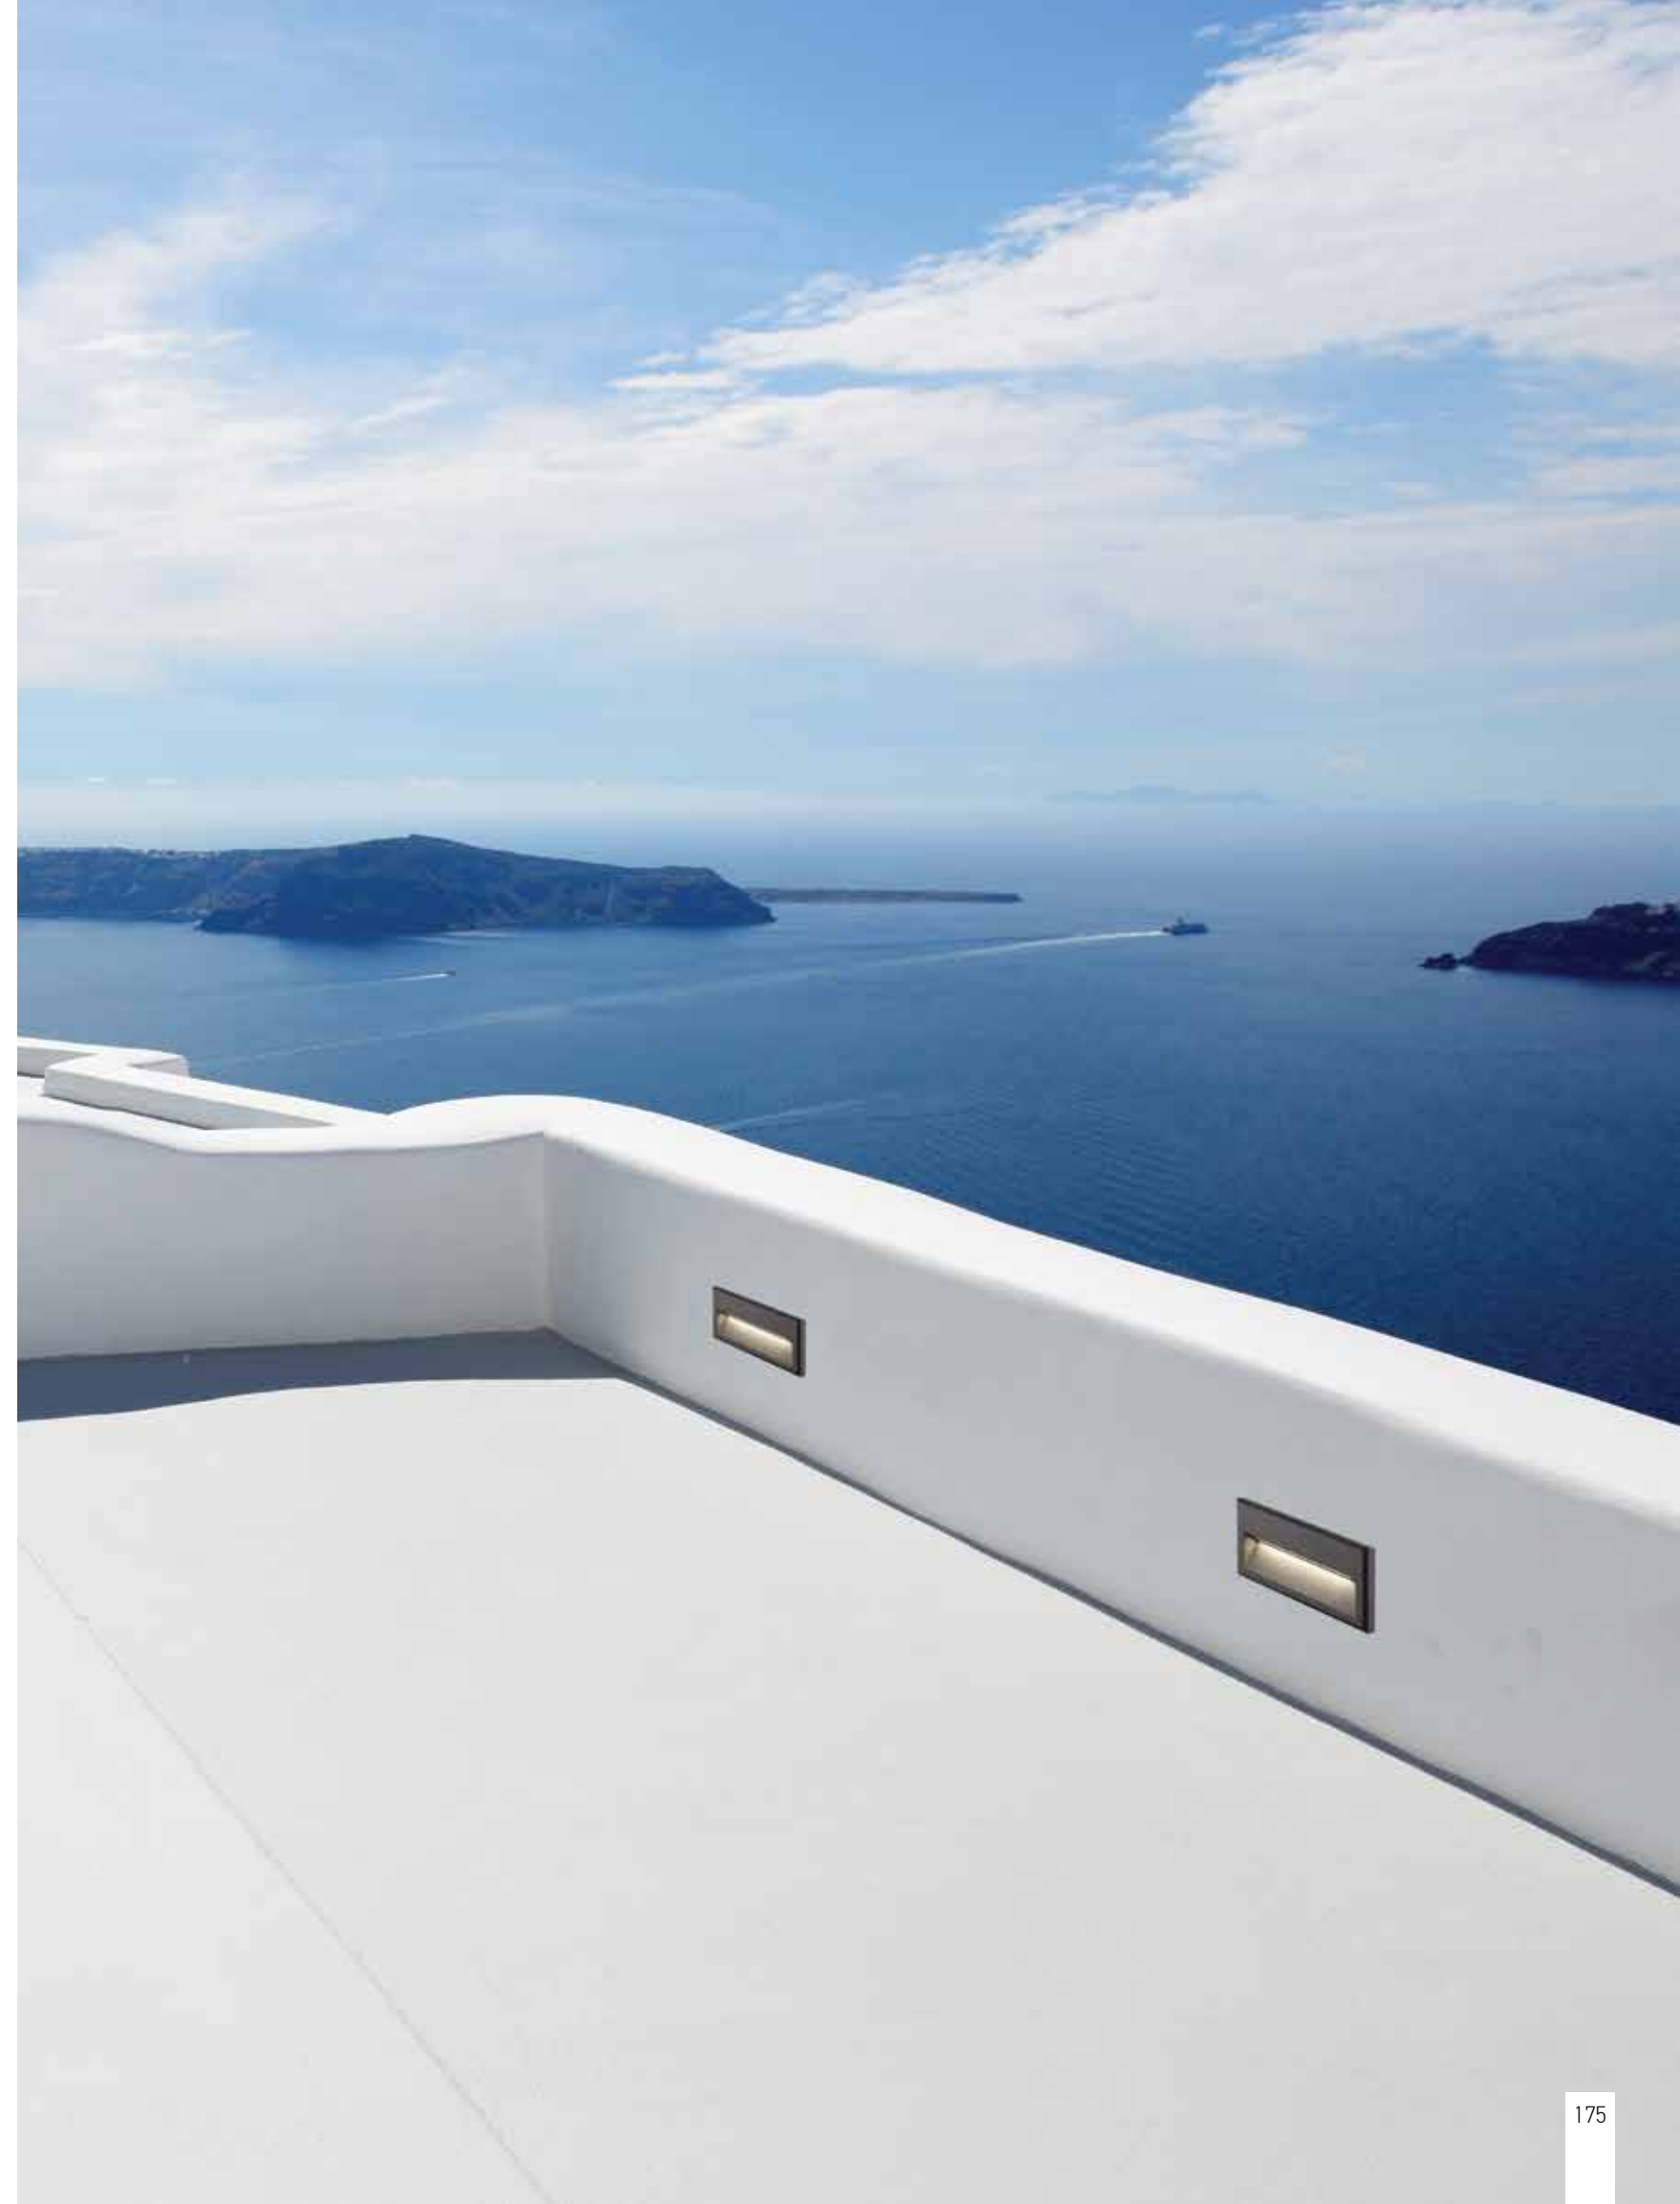


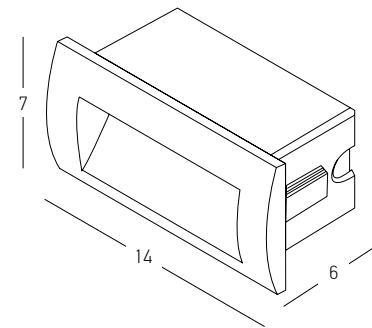


Power 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 188Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 14cm H: 7cm
 Depth 6cm
 Material Aluminium - PC Diffuser
 Recessed Mounting Box L: 6cm W: 13cm H: 6cm (Included)
 Color Graphite / **Code E247-G**
 Color Sandy White / **Code E247-W**

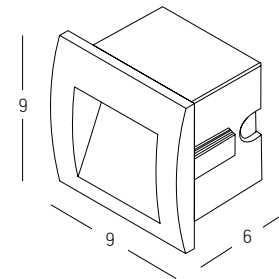


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 65Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 9cm H: 9cm
 Depth 6cm
 Material Aluminium - PC Diffuser
 Recessed Mounting Box L: 6cm W: 6cm H: 8cm (Included)
 Color Graphite / **Code E246-G**
 Color Sandy White / **Code E246-W**

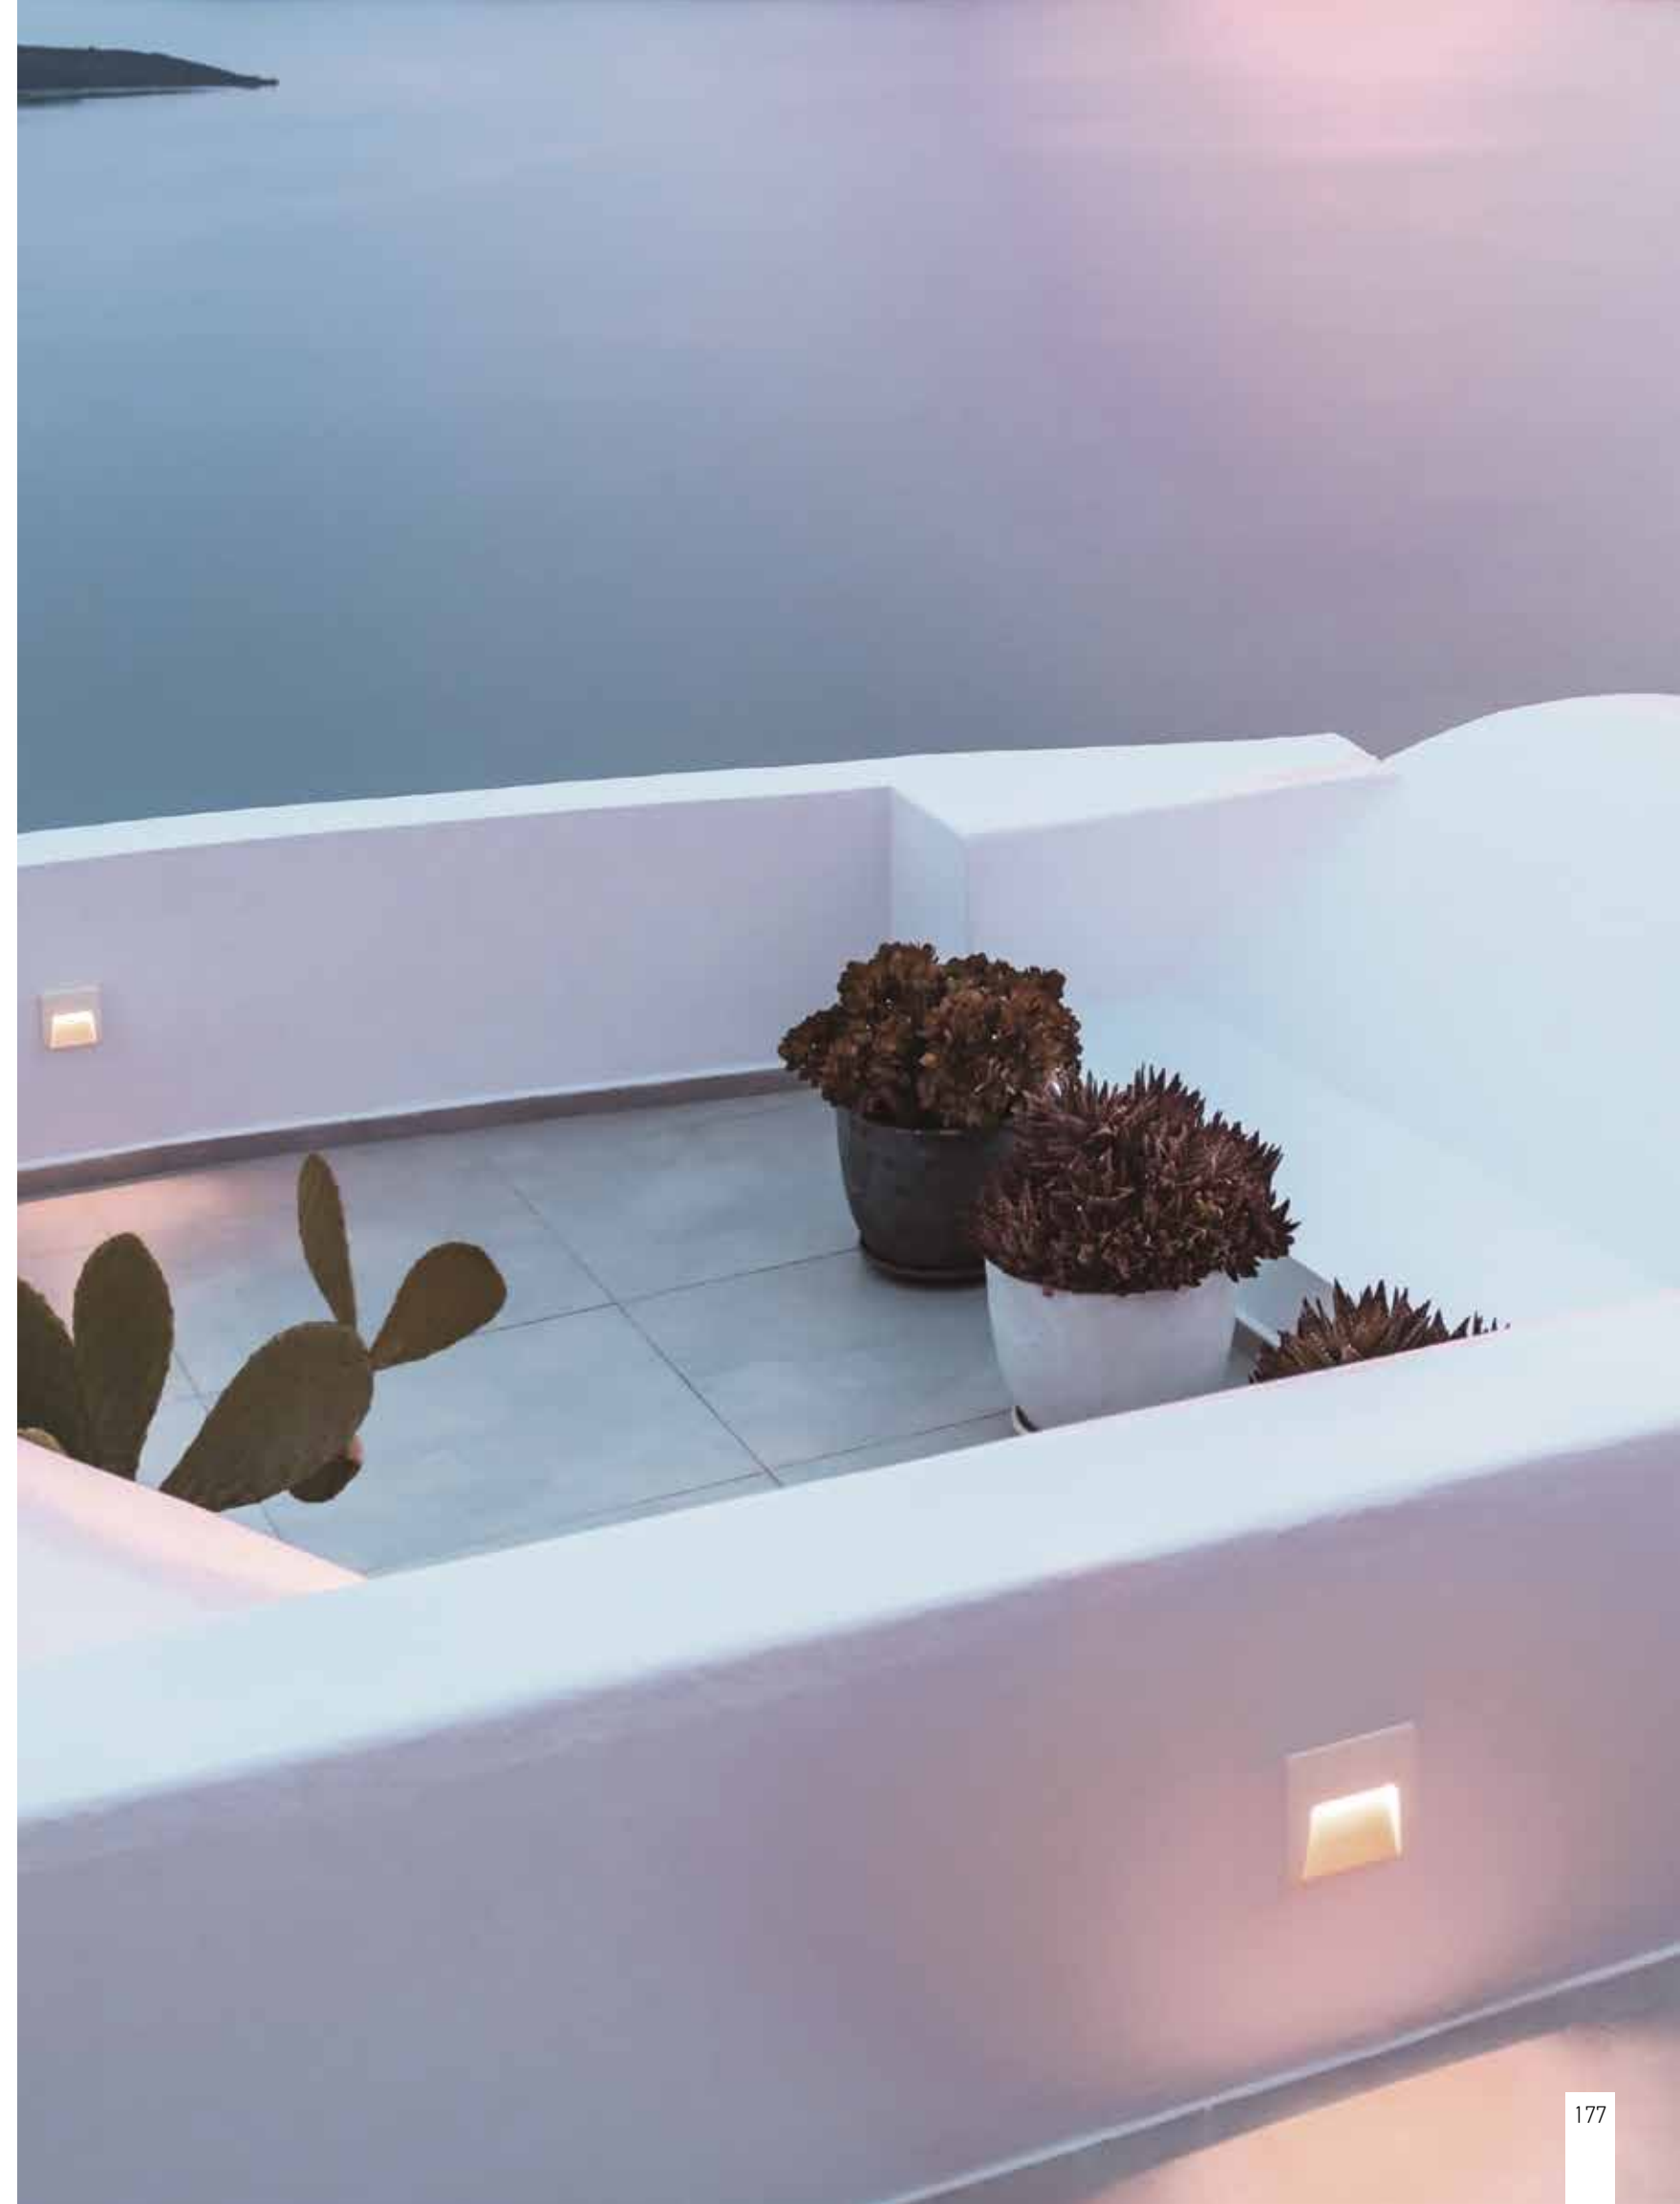


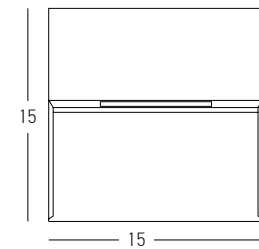

Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions L: 3.7cm W: 15cm H: 15cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E241-G**
 Sandy White / **Code E241-W**

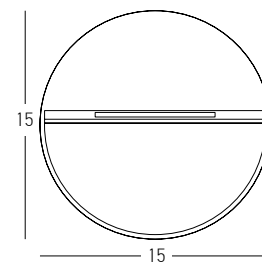


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions Ø: 15cm L: 3.7cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E242-G**
 Sandy White / **Code E242-W**

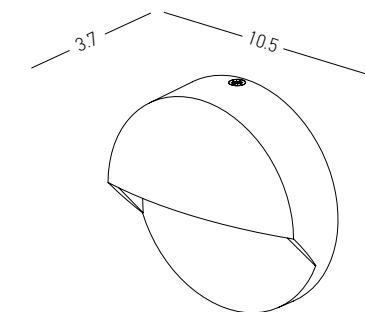


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 190Lm
 Cri 80
 IP 65
 Dimensions Ø: 10.5cm L: 3.7cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E294**



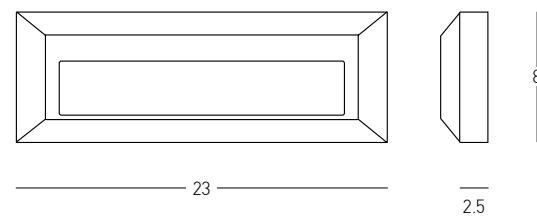


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 132Lm
 Cri 80
 IP 65
 Dimensions L: 2.5cm W: 23cm H: 8cm
 Material ABS
 Color Graphite / **Code E229**

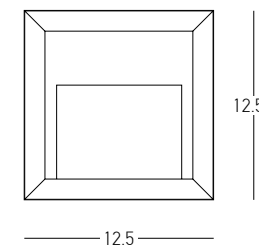


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 69Lm
 Cri 80
 IP 65
 Dimensions L: 2.5cm W: 12.5cm H: 12.5cm
 Material ABS
 Color Graphite / **Code E230**



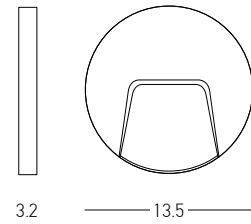


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 92Lm
 Cri 80
 IP 54
 Dimensions Ø: 13.5cm L: 3.2cm
 Material ABS
 Color Graphite / **Code E183**
 White / **Code E184**


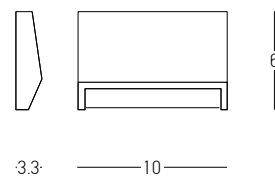


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 88Lm
 Cri 80
 IP 54
 Dimensions L: 3.3cm W: 10cm H: 6cm
 Material ABS
 Color Graphite / **Code E181**
 White / **Code E182**



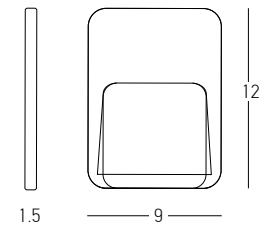

Power 1.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 90Lm
 Cri 80
 IP 65
 Dimensions L: 1.5cm W: 9cm H: 12cm
 Material ABS - PC Diffuser
 Color White / **Code E187**

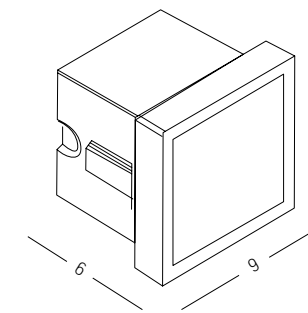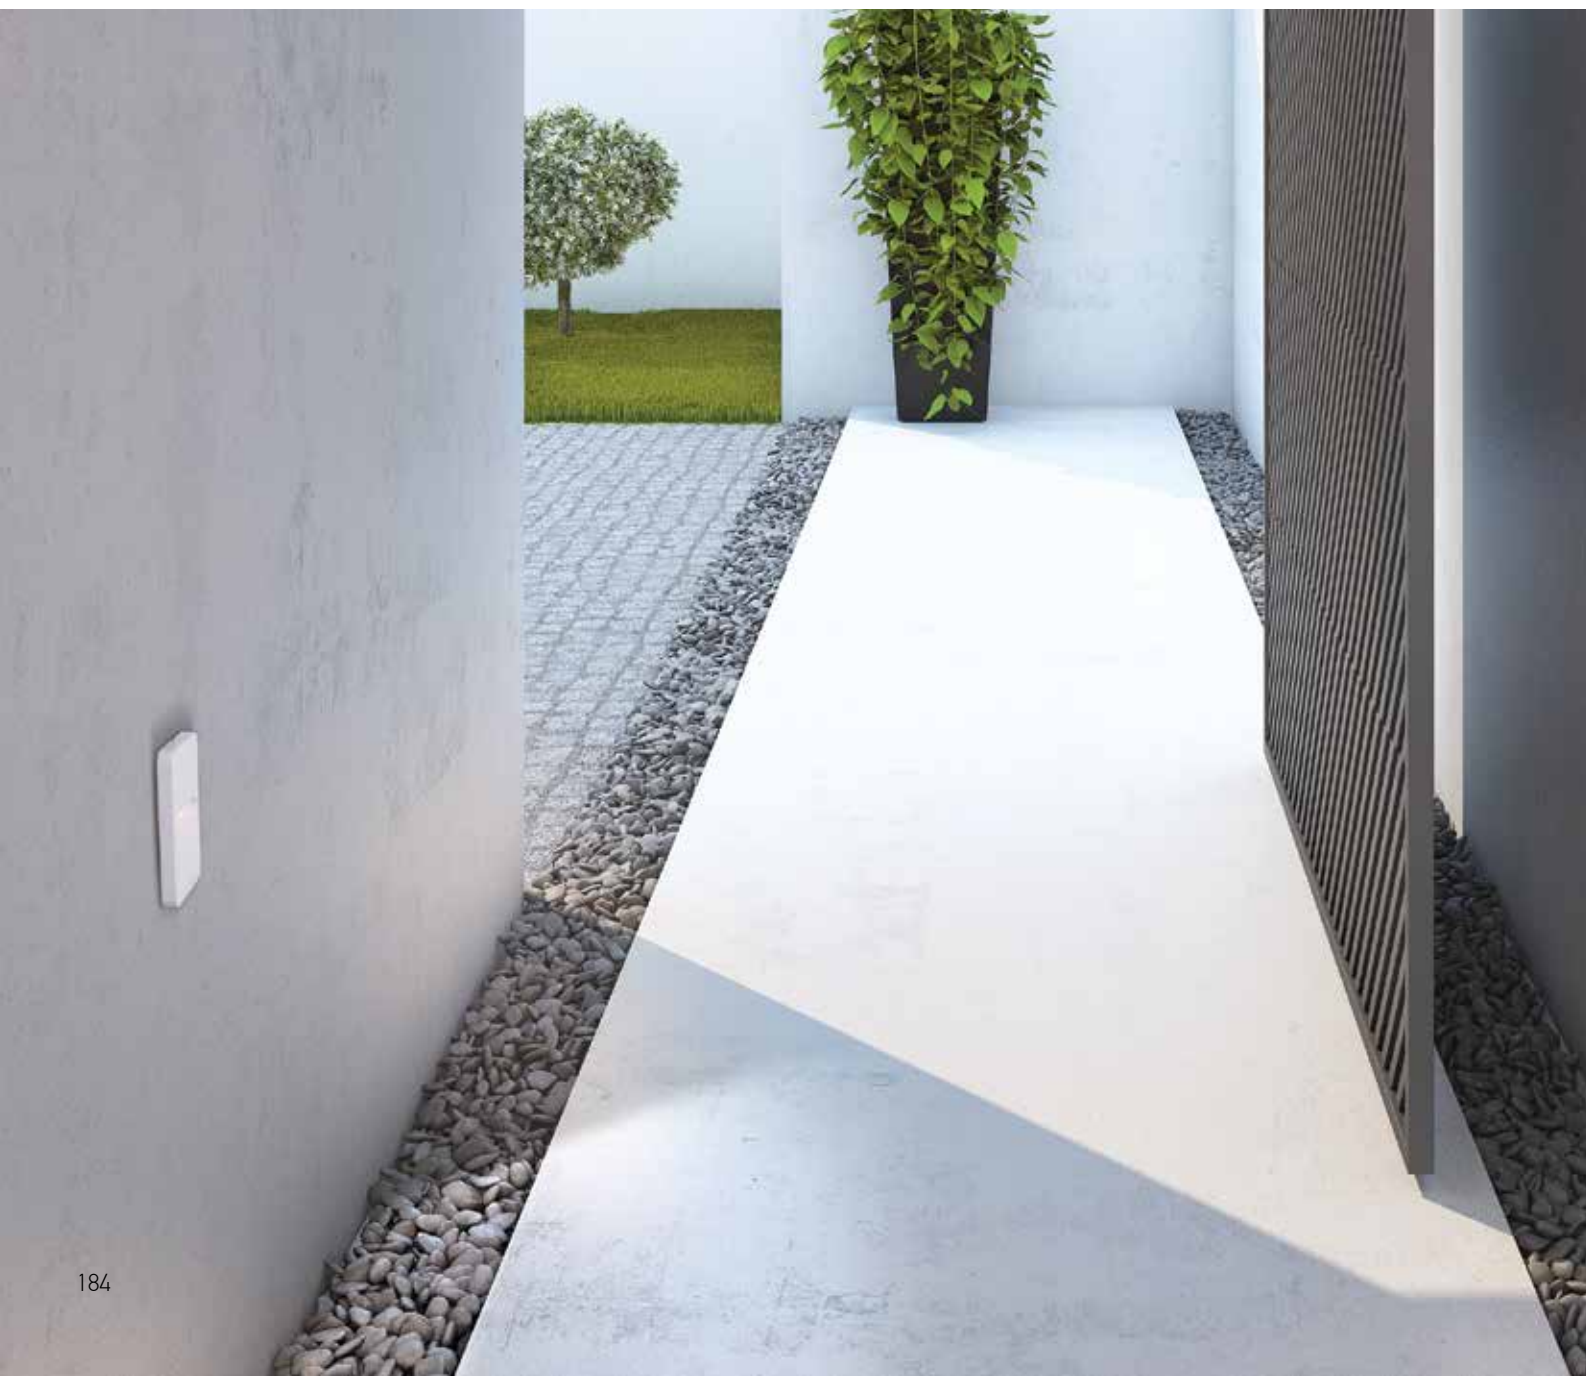


Power 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 185Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 9cm H: 9cm
 Depth 6cm
 Material Aluminium - Tempered Glass
 Recessed Mounting Box L: 6cm W: 8cm H: 8cm (Included)
 Color Black / **Code E248**







CEILING | p.186-199



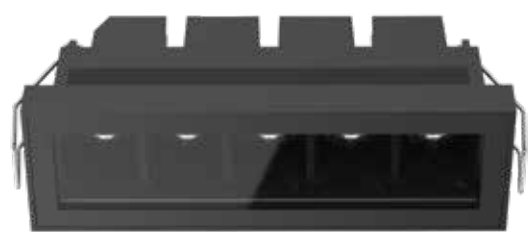


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 757Lm
 Cri 90
 IP 65
 Dimensions L: 15.7cm W: 5cm H: 6.8cm
 Cutting Hole 14.2 x 3.5cm
 Beam Angle 40°
 Non Dimmable ☒
 Material Stainless Steel - Aluminium - Tempered Glass
 Depth Required IT: 6cm
 Driver Included
 Color Sandy Black / **Code E332**
 Sandy White / **Code E333**

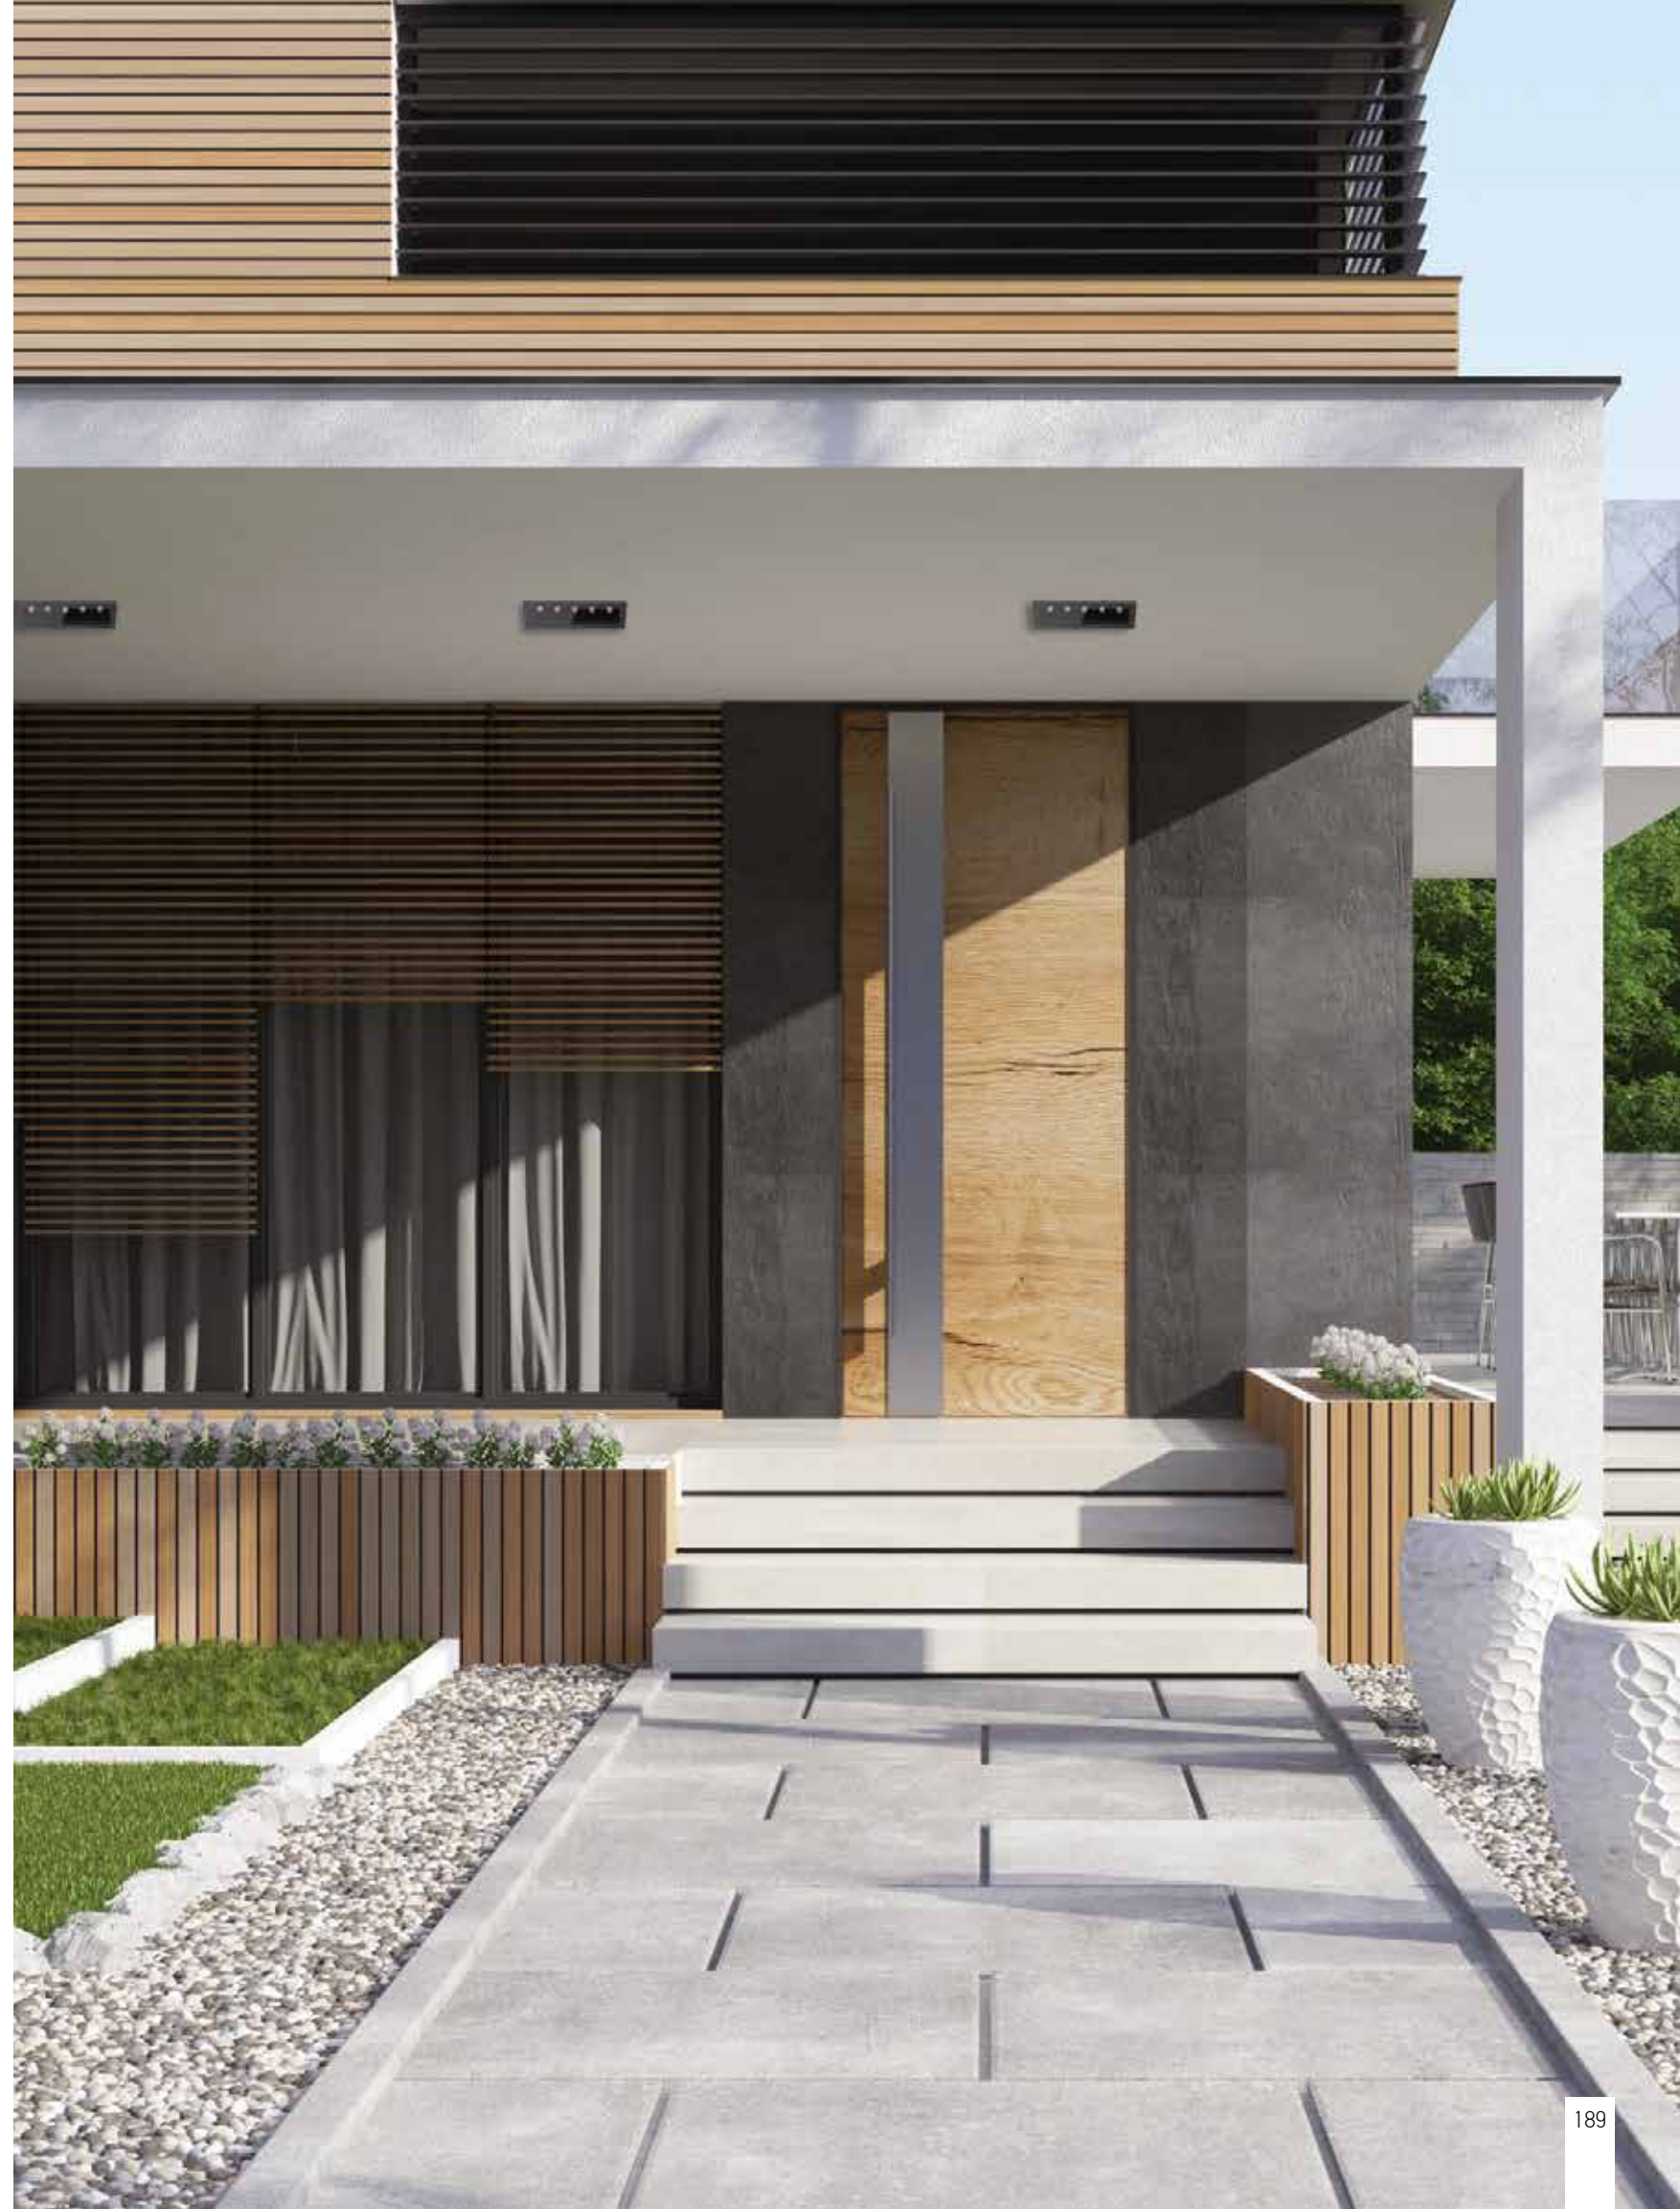
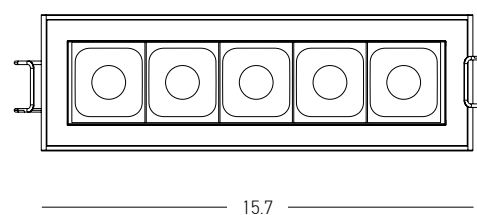


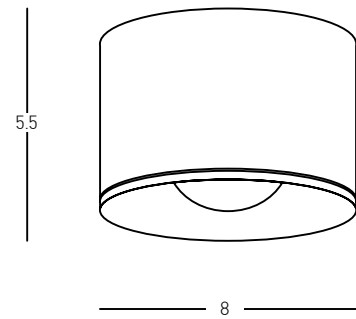


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 561Lm
 Cri 90
 IP 54
 Dimensions Ø: 8cm H: 5.5cm
 Beam Angle 120°
 Material Aluminium
 Color Sandy Black / **Code S131**
 Color Sandy White / **Code S132**

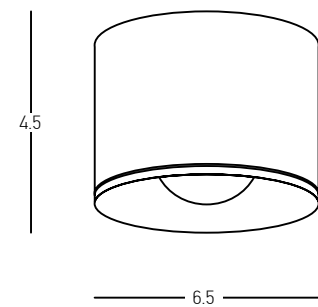


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 454Lm
 Cri 80
 IP 54
 Dimensions Ø: 6.5cm H: 4.5cm
 Beam Angle 120°
 Material Aluminium
 Color Sandy Black / **Code S133**
 Color Sandy White / **Code S134**

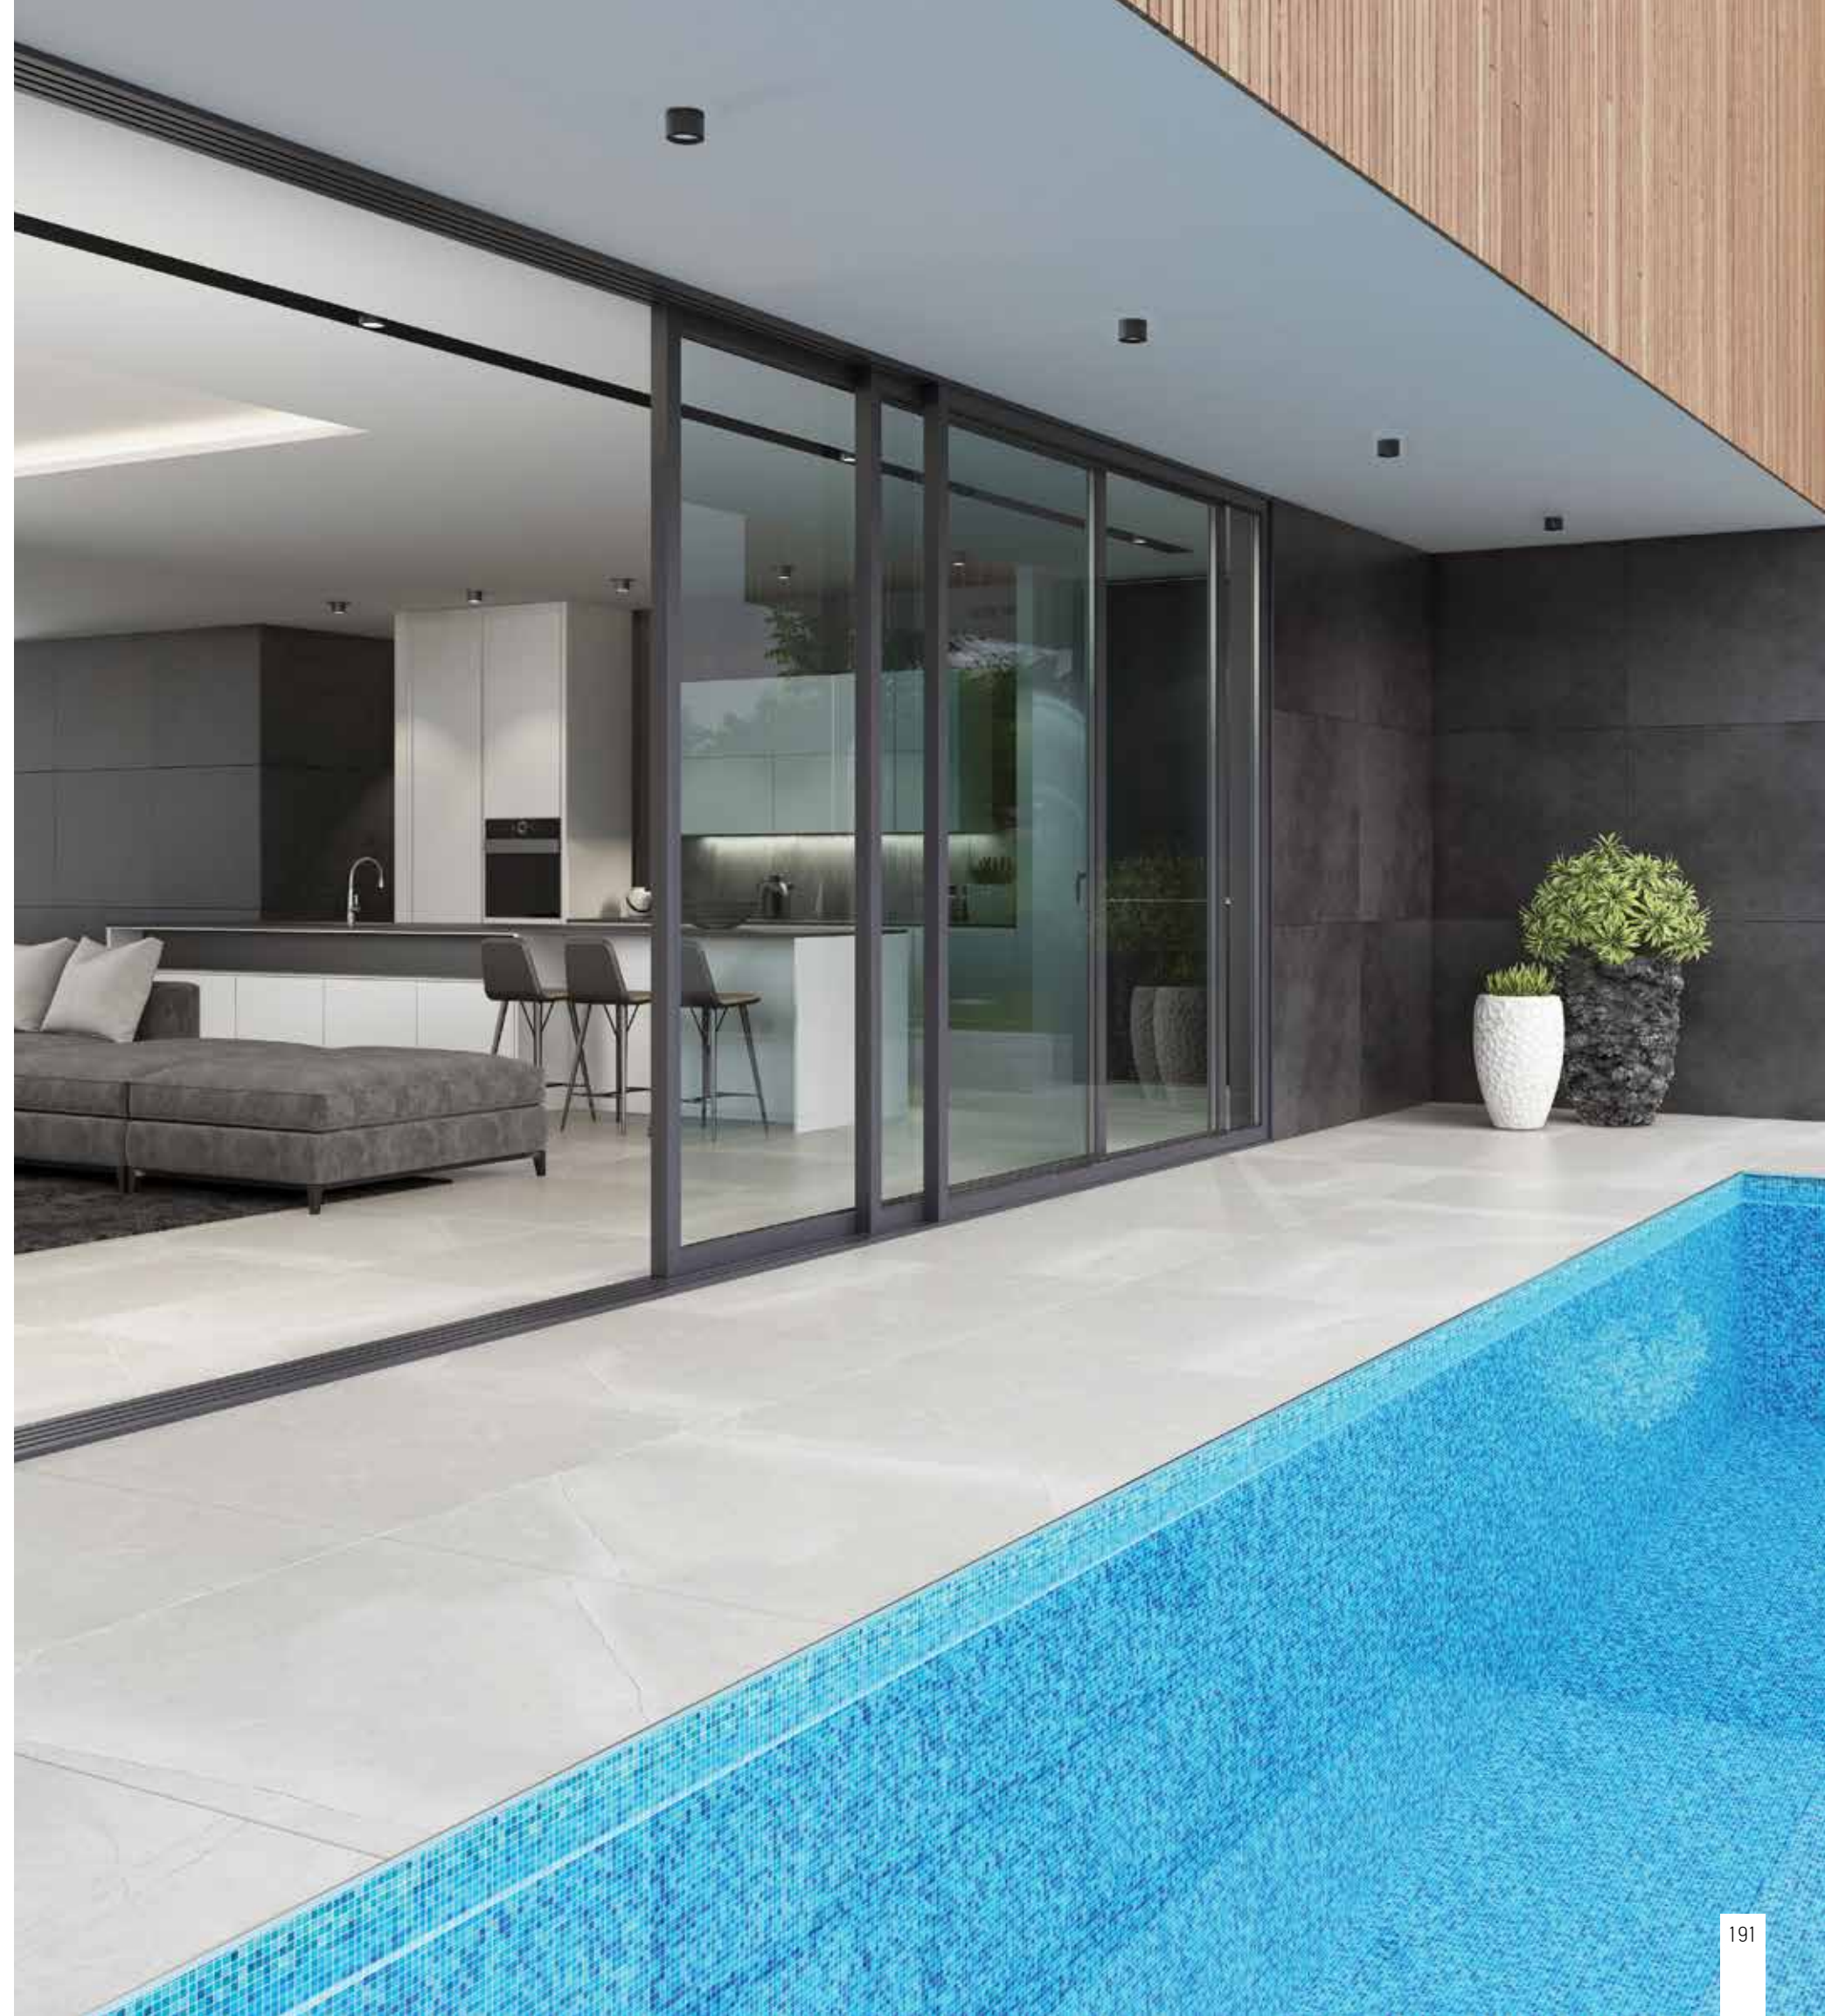

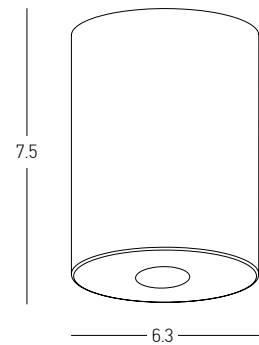


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 500Lm
 Cri 90
 IP 54
 Dimensions Ø: 6.3cm H: 7.5cm
 Beam Angle 20°
 Material Aluminium - Glass
 Special Feature Driver Included
 Color Sandy Black / **Code S112**
 Color Sandy White / **Code S113**

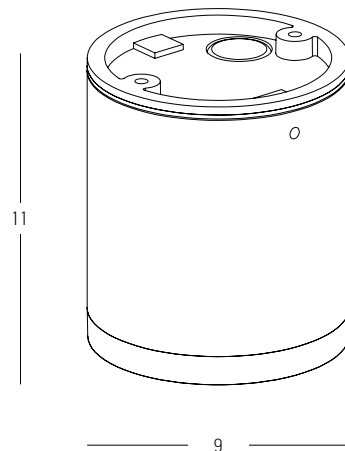


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 597Lm
 Cri 80
 IP 65
 Dimensions Ø: 9cm H: 11cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E340**



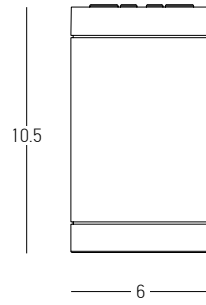


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 6cm H: 10.5cm
 Material Aluminium - Glass Diffuser
 Color Sandy Black / **Code E219**
 Color Sandy White / **Code E220**

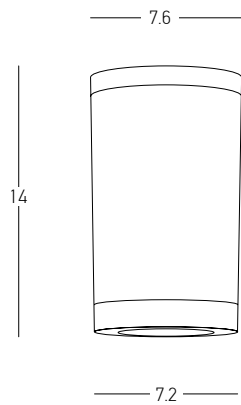


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 7.2-7.6cm H: 14cm
 Material ABS - Acrylic
 Color White Matt / **Code E308**
 Color Black Matt / **Code E309**



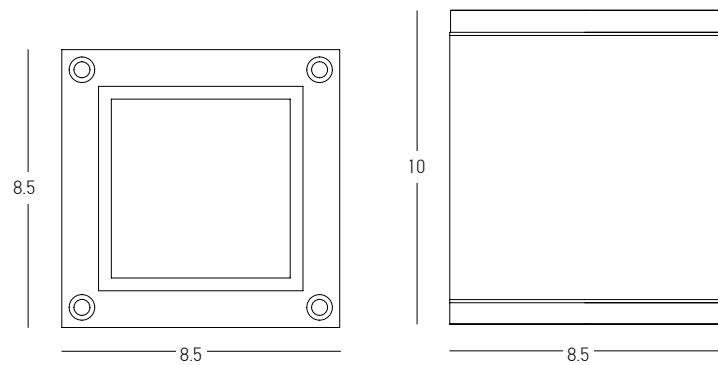


Bulb 1x GU10
Power 35W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 8.5cm W: 8.5cm H: 10cm
Material Aluminium - Glass
Color Graphite / **Code E269**
Color Sandy White / **Code E270**




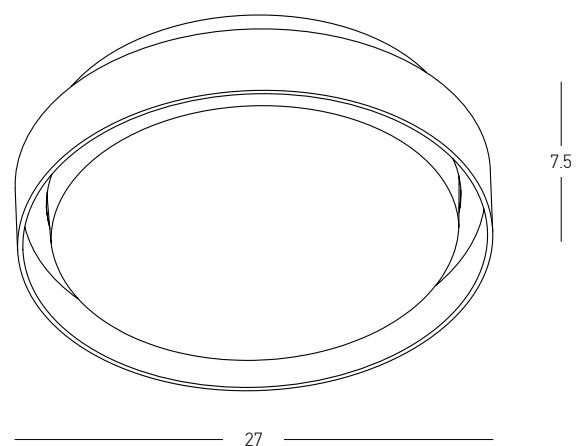


Power 20W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 2041Lm
Cri 80
IP 65
Dimensions Ø: 27cm H: 7.5cm
Material Aluminium - PC Diffuser
Special Feature Driver Included
Color Sandy White / **Code E326**
Color Graphite / **Code E327**

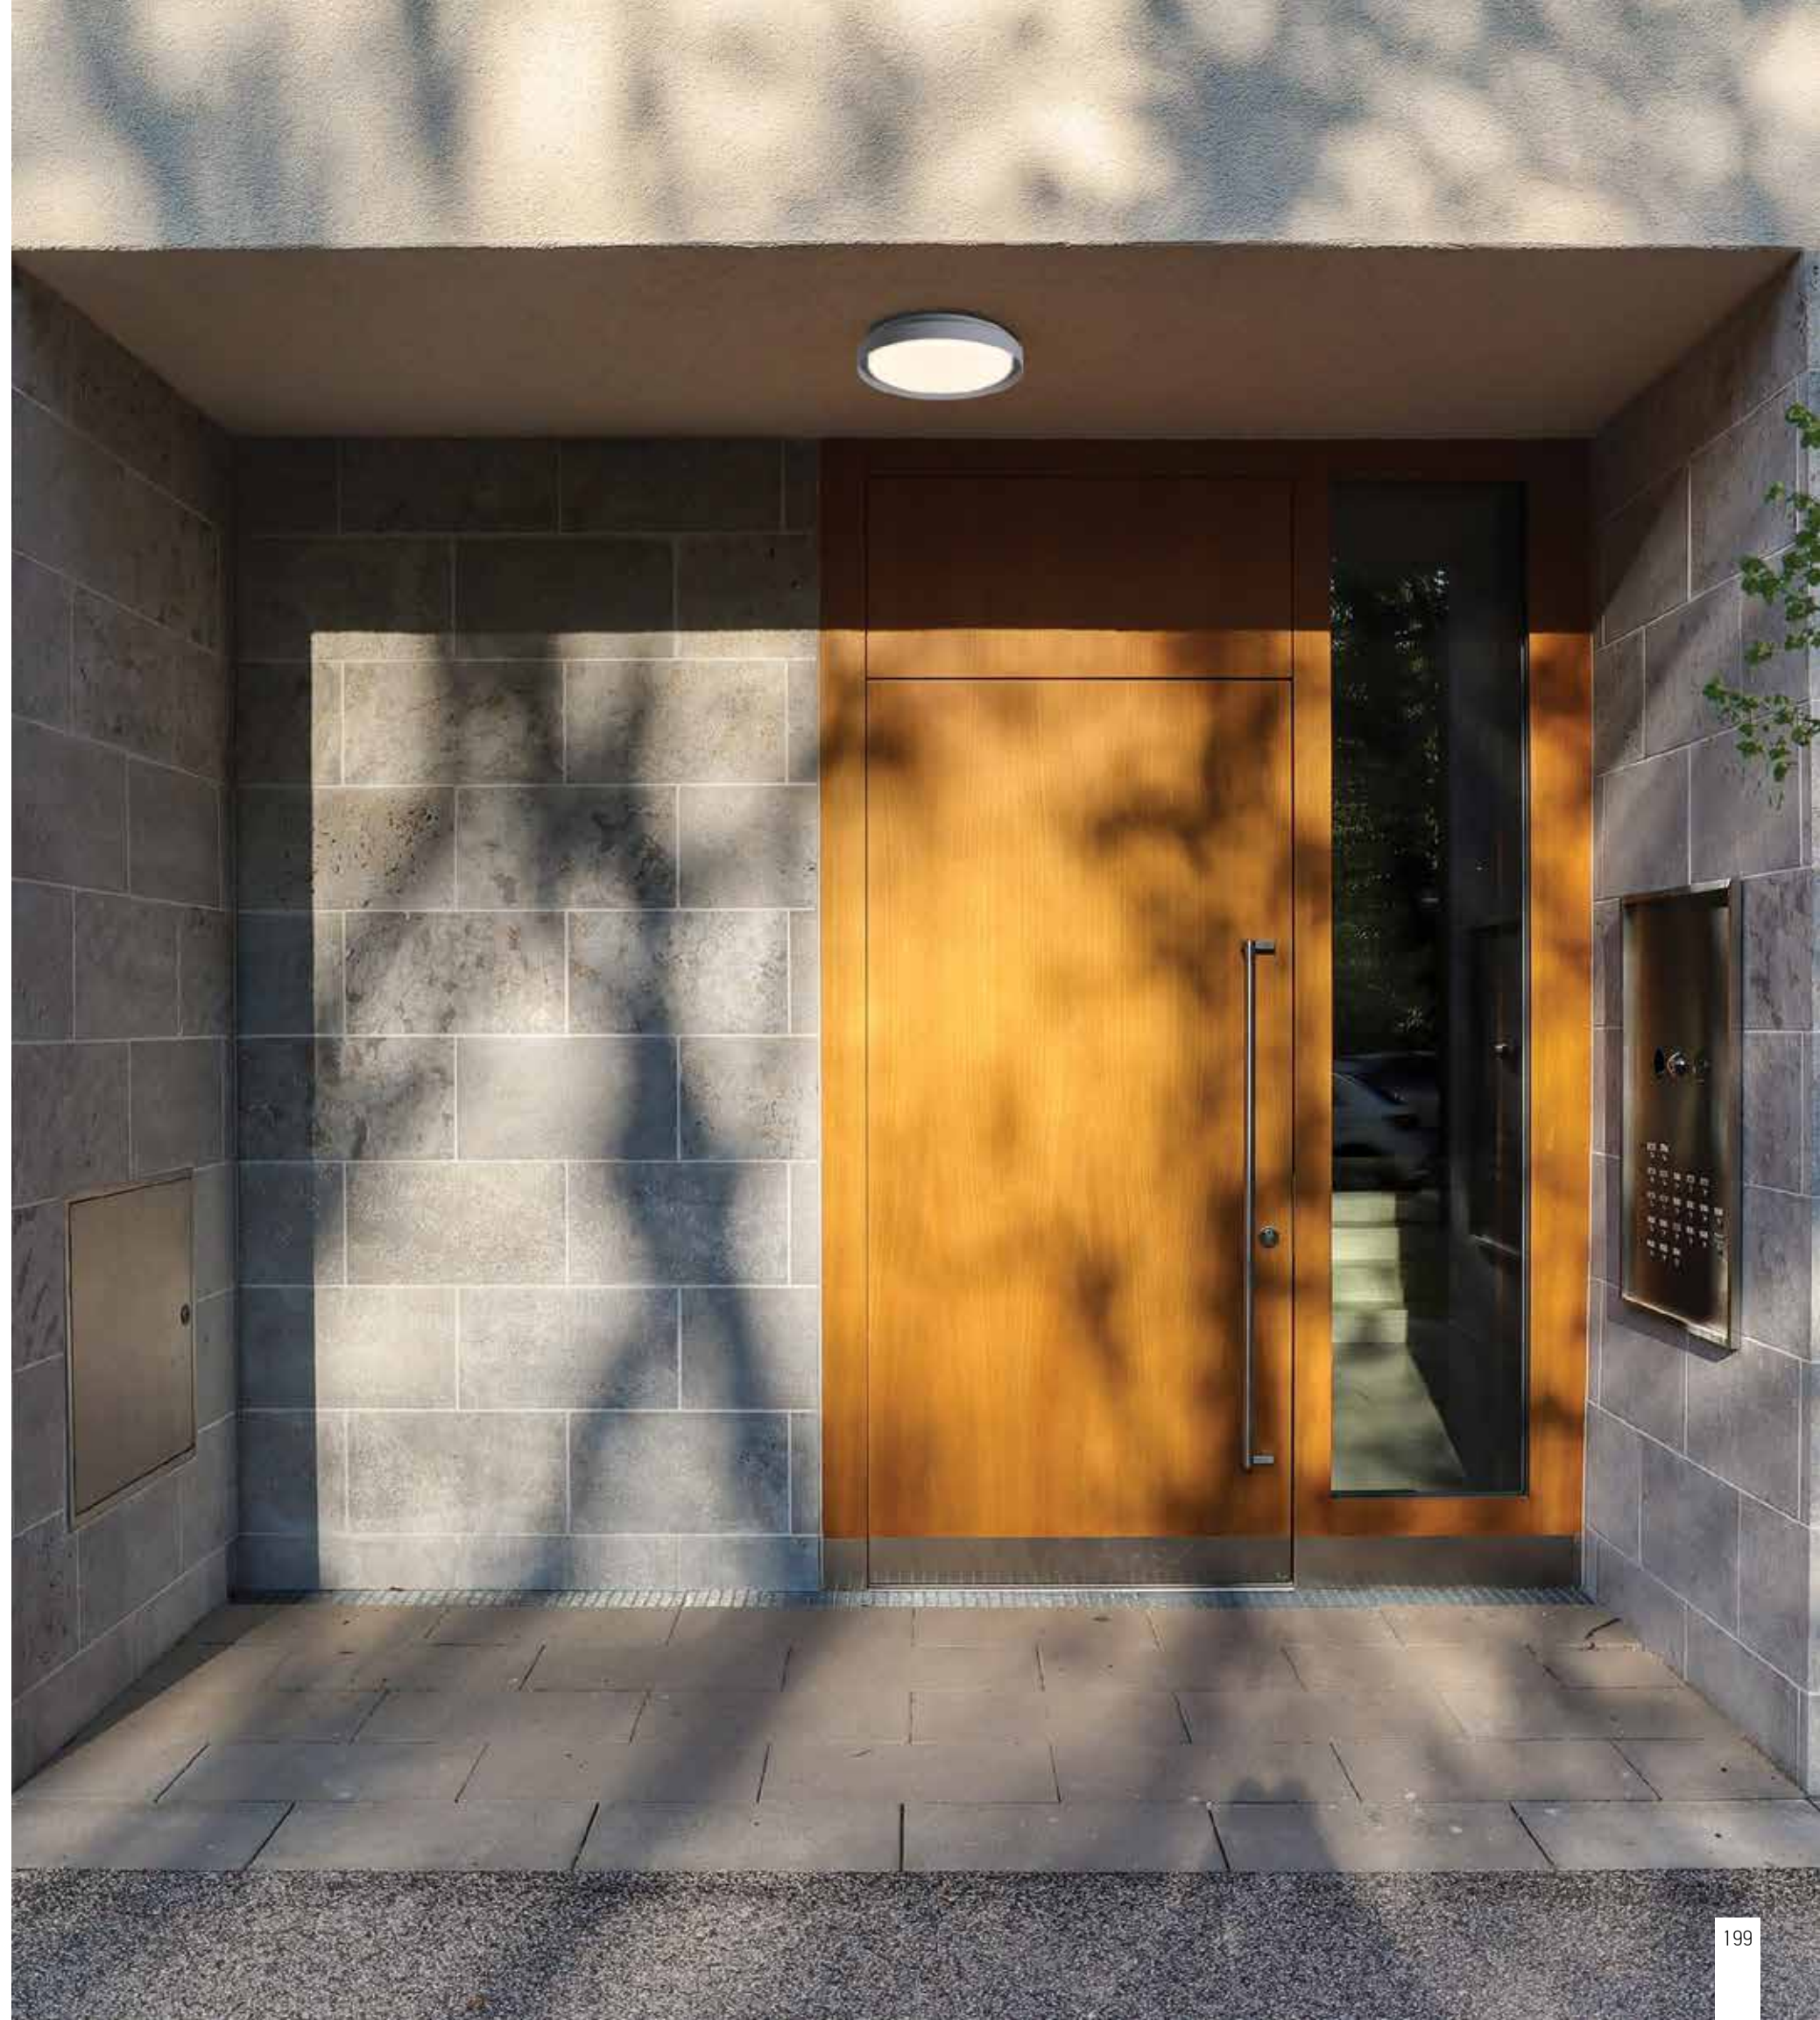

INGROUND | p.200-213

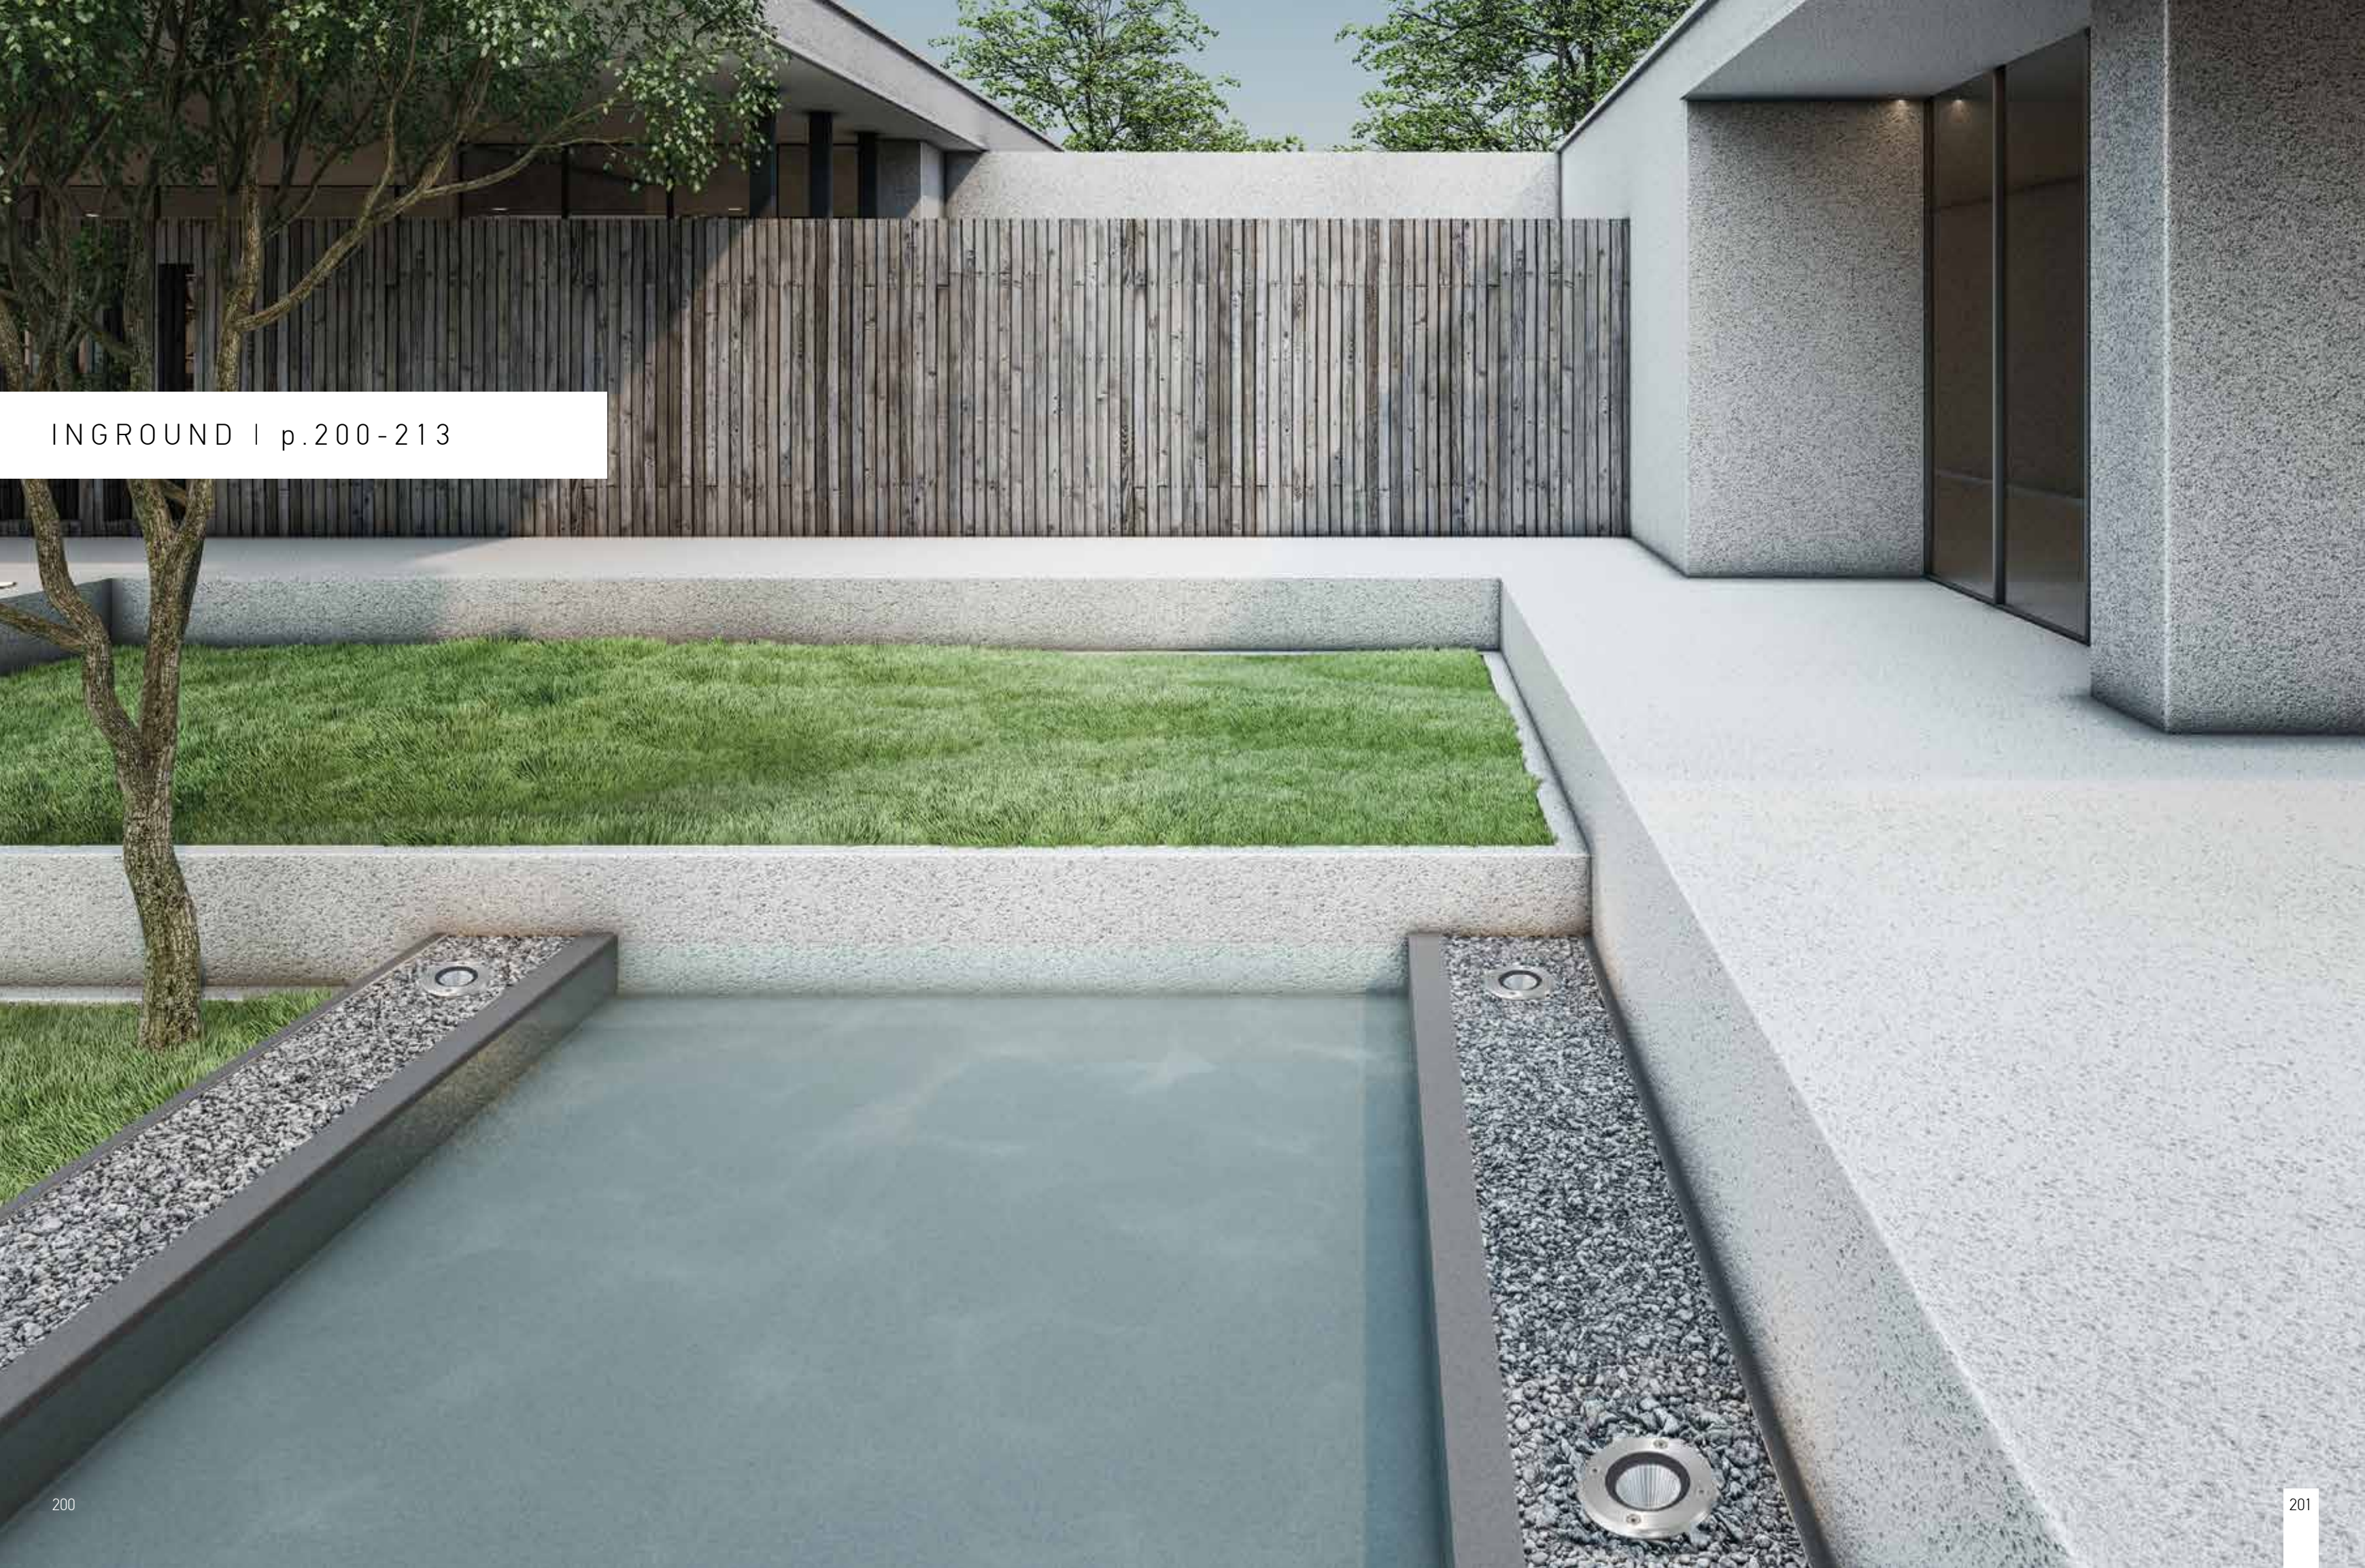


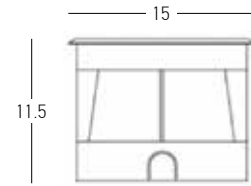


Asymmetric

Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 67
 IK 8
 Dimensions Ø: 15cm H: 11.5cm
 Beam Angle 45°
 Material Stainless Steel - Tempered Glass
 Depth Required 11.5cm
 Recessed Mounting Box Included
 Special Feature Asymmetric
 50cm Cable Available
 Driver Included

Color

Stainless Steel / **Code E363**





Asymmetric

Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 67
 IK 8
 Dimensions Ø: 13cm H: 14cm
 Beam Angle 45°
 Material Stainless Steel - Tempered Glass
 Depth Required 15cm
 Recessed Mounting Box Included
 Special Feature Asymmetric
 50cm Cable Available
 Driver Included


Color

Stainless Steel / **Code E362**

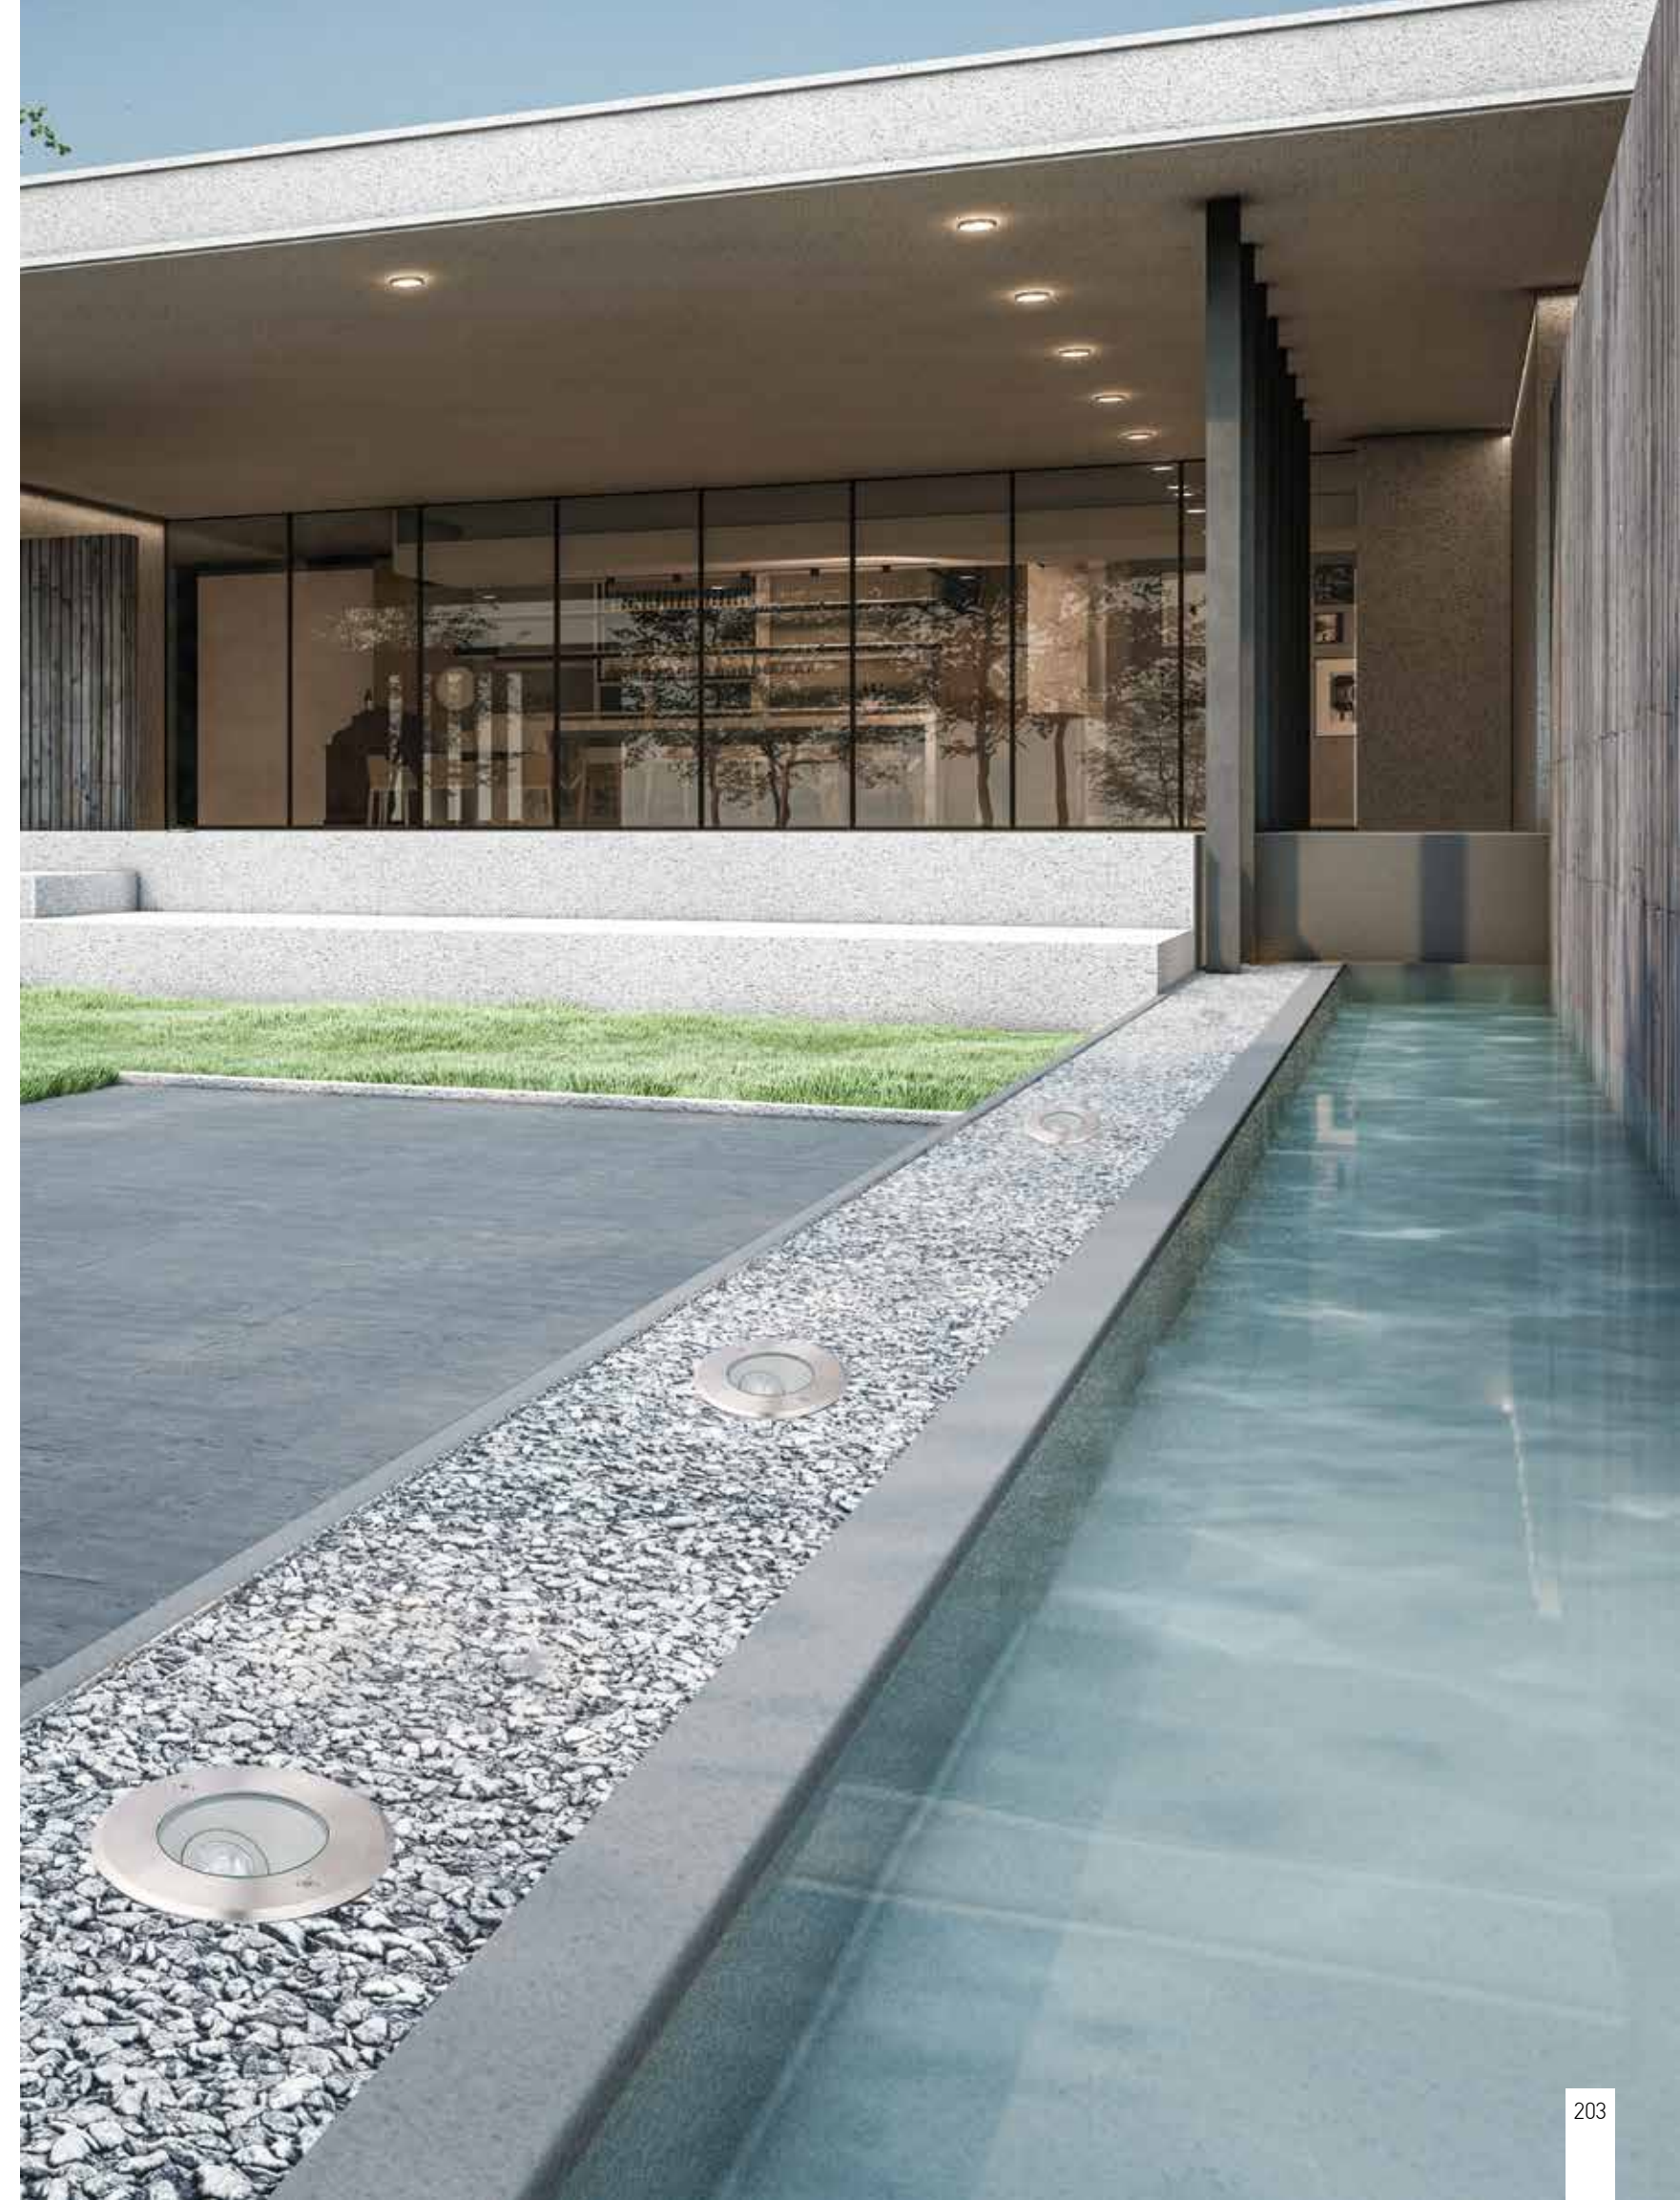





Power 0.2W
 Input 24V
 Color Temperature 3000K
 Lumen 23Lm
 Cri 80
 IP 68
 IK 10
 Dimensions Ø: 1.5cm H: 3.5cm
 Beam Angle 45°
 Material Stainless Steel - Tempered Glass
 Depth Required 11: 5cm
 Special Feature 50cm Cable Available
 Recommended Driver D-20-24 (Not Included)
 Color Stainless Steel / **Code E364**

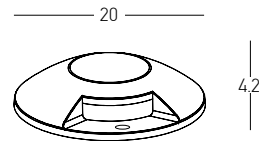


Power 2x 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 600Lm
 Cri 80
 IP 67
 IK 10
 Dimensions Ø: 20cm H: 4.2cm
 Material Aluminium
 Special Feature Surface Ground
 Driver Included
 Color Grey / **Code Z69058-B**

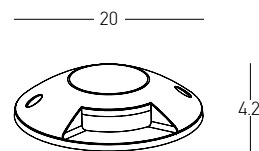


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 300Lm
 Cri 80
 IP 67
 IK 10
 Dimensions Ø: 20cm H: 4.2cm
 Material Aluminium
 Special Feature Surface Ground
 Driver Included
 Color Grey / **Code Z69058-A**

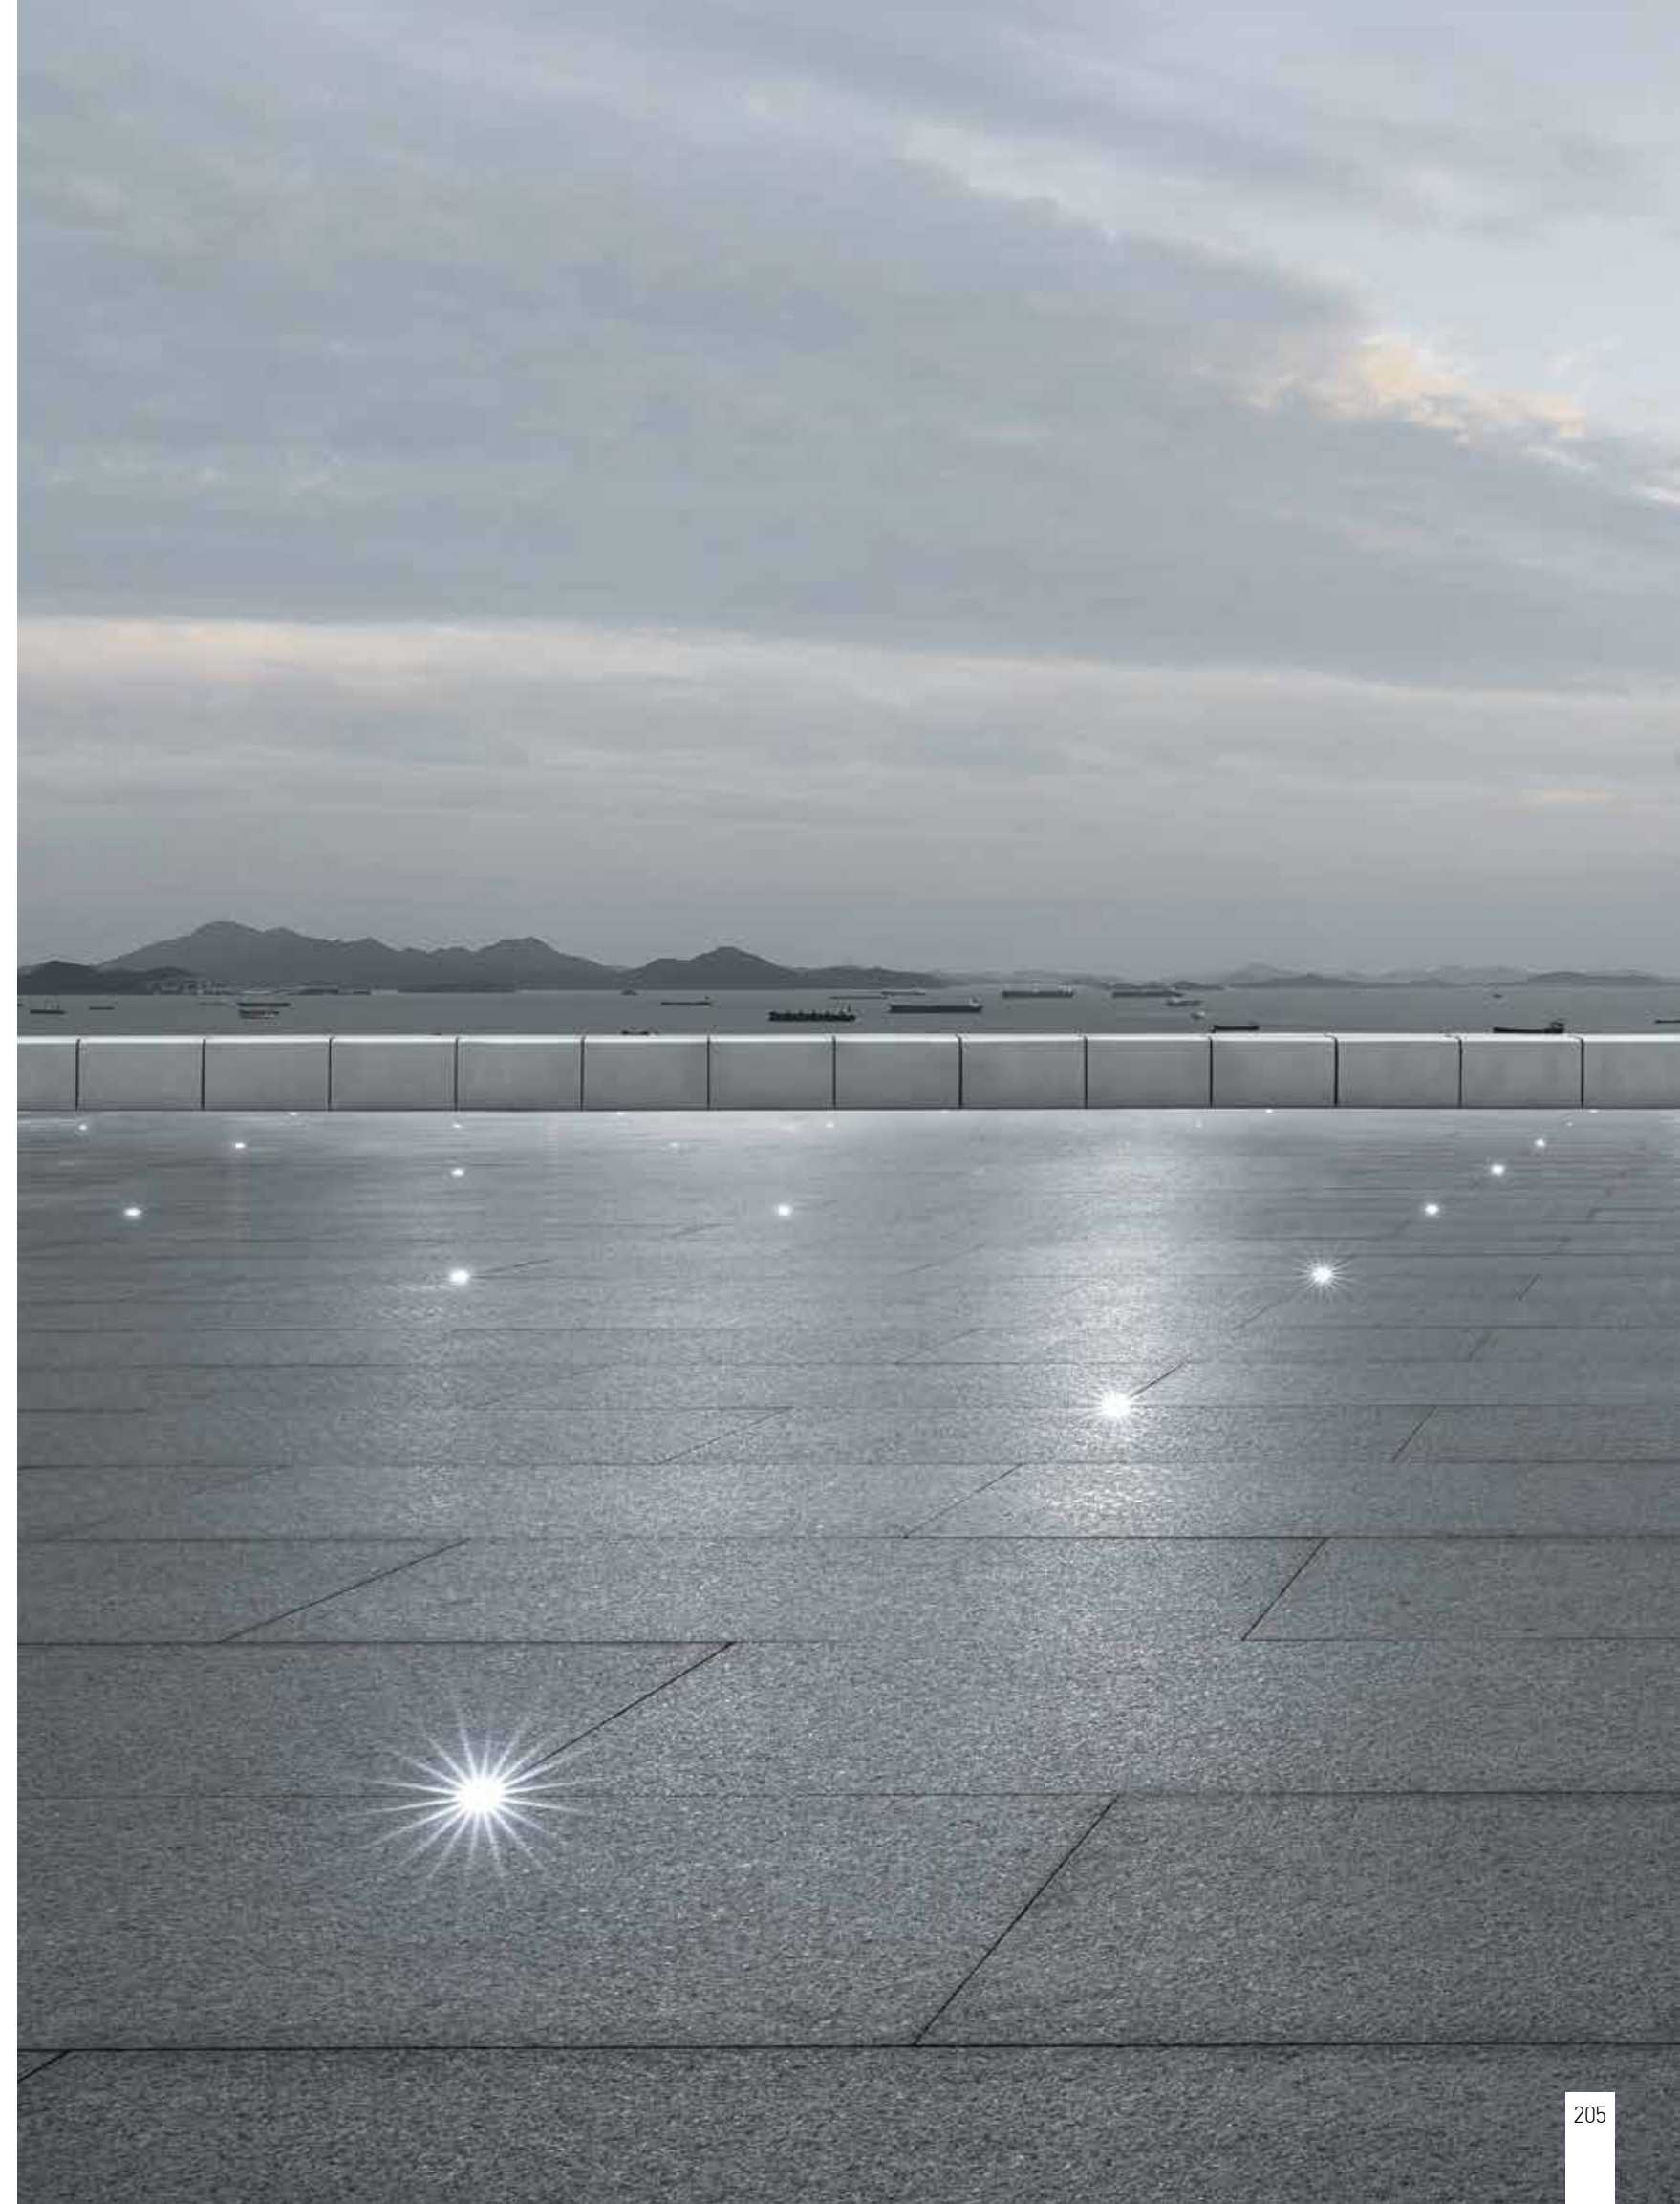


OUTDOOR LIGHTING | INGROUND




Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 232Lm
 Cri 80
 IP 65
 IK 8
 Dimensions Ø: 4.5cm H: 9.3cm
 Material Aluminium - Stainless Steel - PC Diffuser
 Depth Required 12cm
 Recessed Mounting Box Included
 Recommended Driver D-20-24 (Not Included)
 Color Aluminium / **Code E178**





Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 150Lm
 Cri 80
 IP 65
 IK 10
 Dimensions Ø: 4.8cm H: 10cm
 Material Aluminium - Stainless Steel - PC Diffuser
 Depth Required 13cm
 Recessed Mounting Box Included
 Recommended Driver D-20-24 (Not Included)
 Color Aluminium / **Code E180**



Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 95Lm
 Cri 80
 IP 65
 IK 10
 Dimensions Ø: 4.8cm H: 10cm
 Material Aluminium - Stainless Steel - PC Diffuser
 Depth Required 13cm
 Recessed Mounting Box Included
 Recommended Driver D-20-24 (Not Included)
 Color Aluminium / **Code E179**


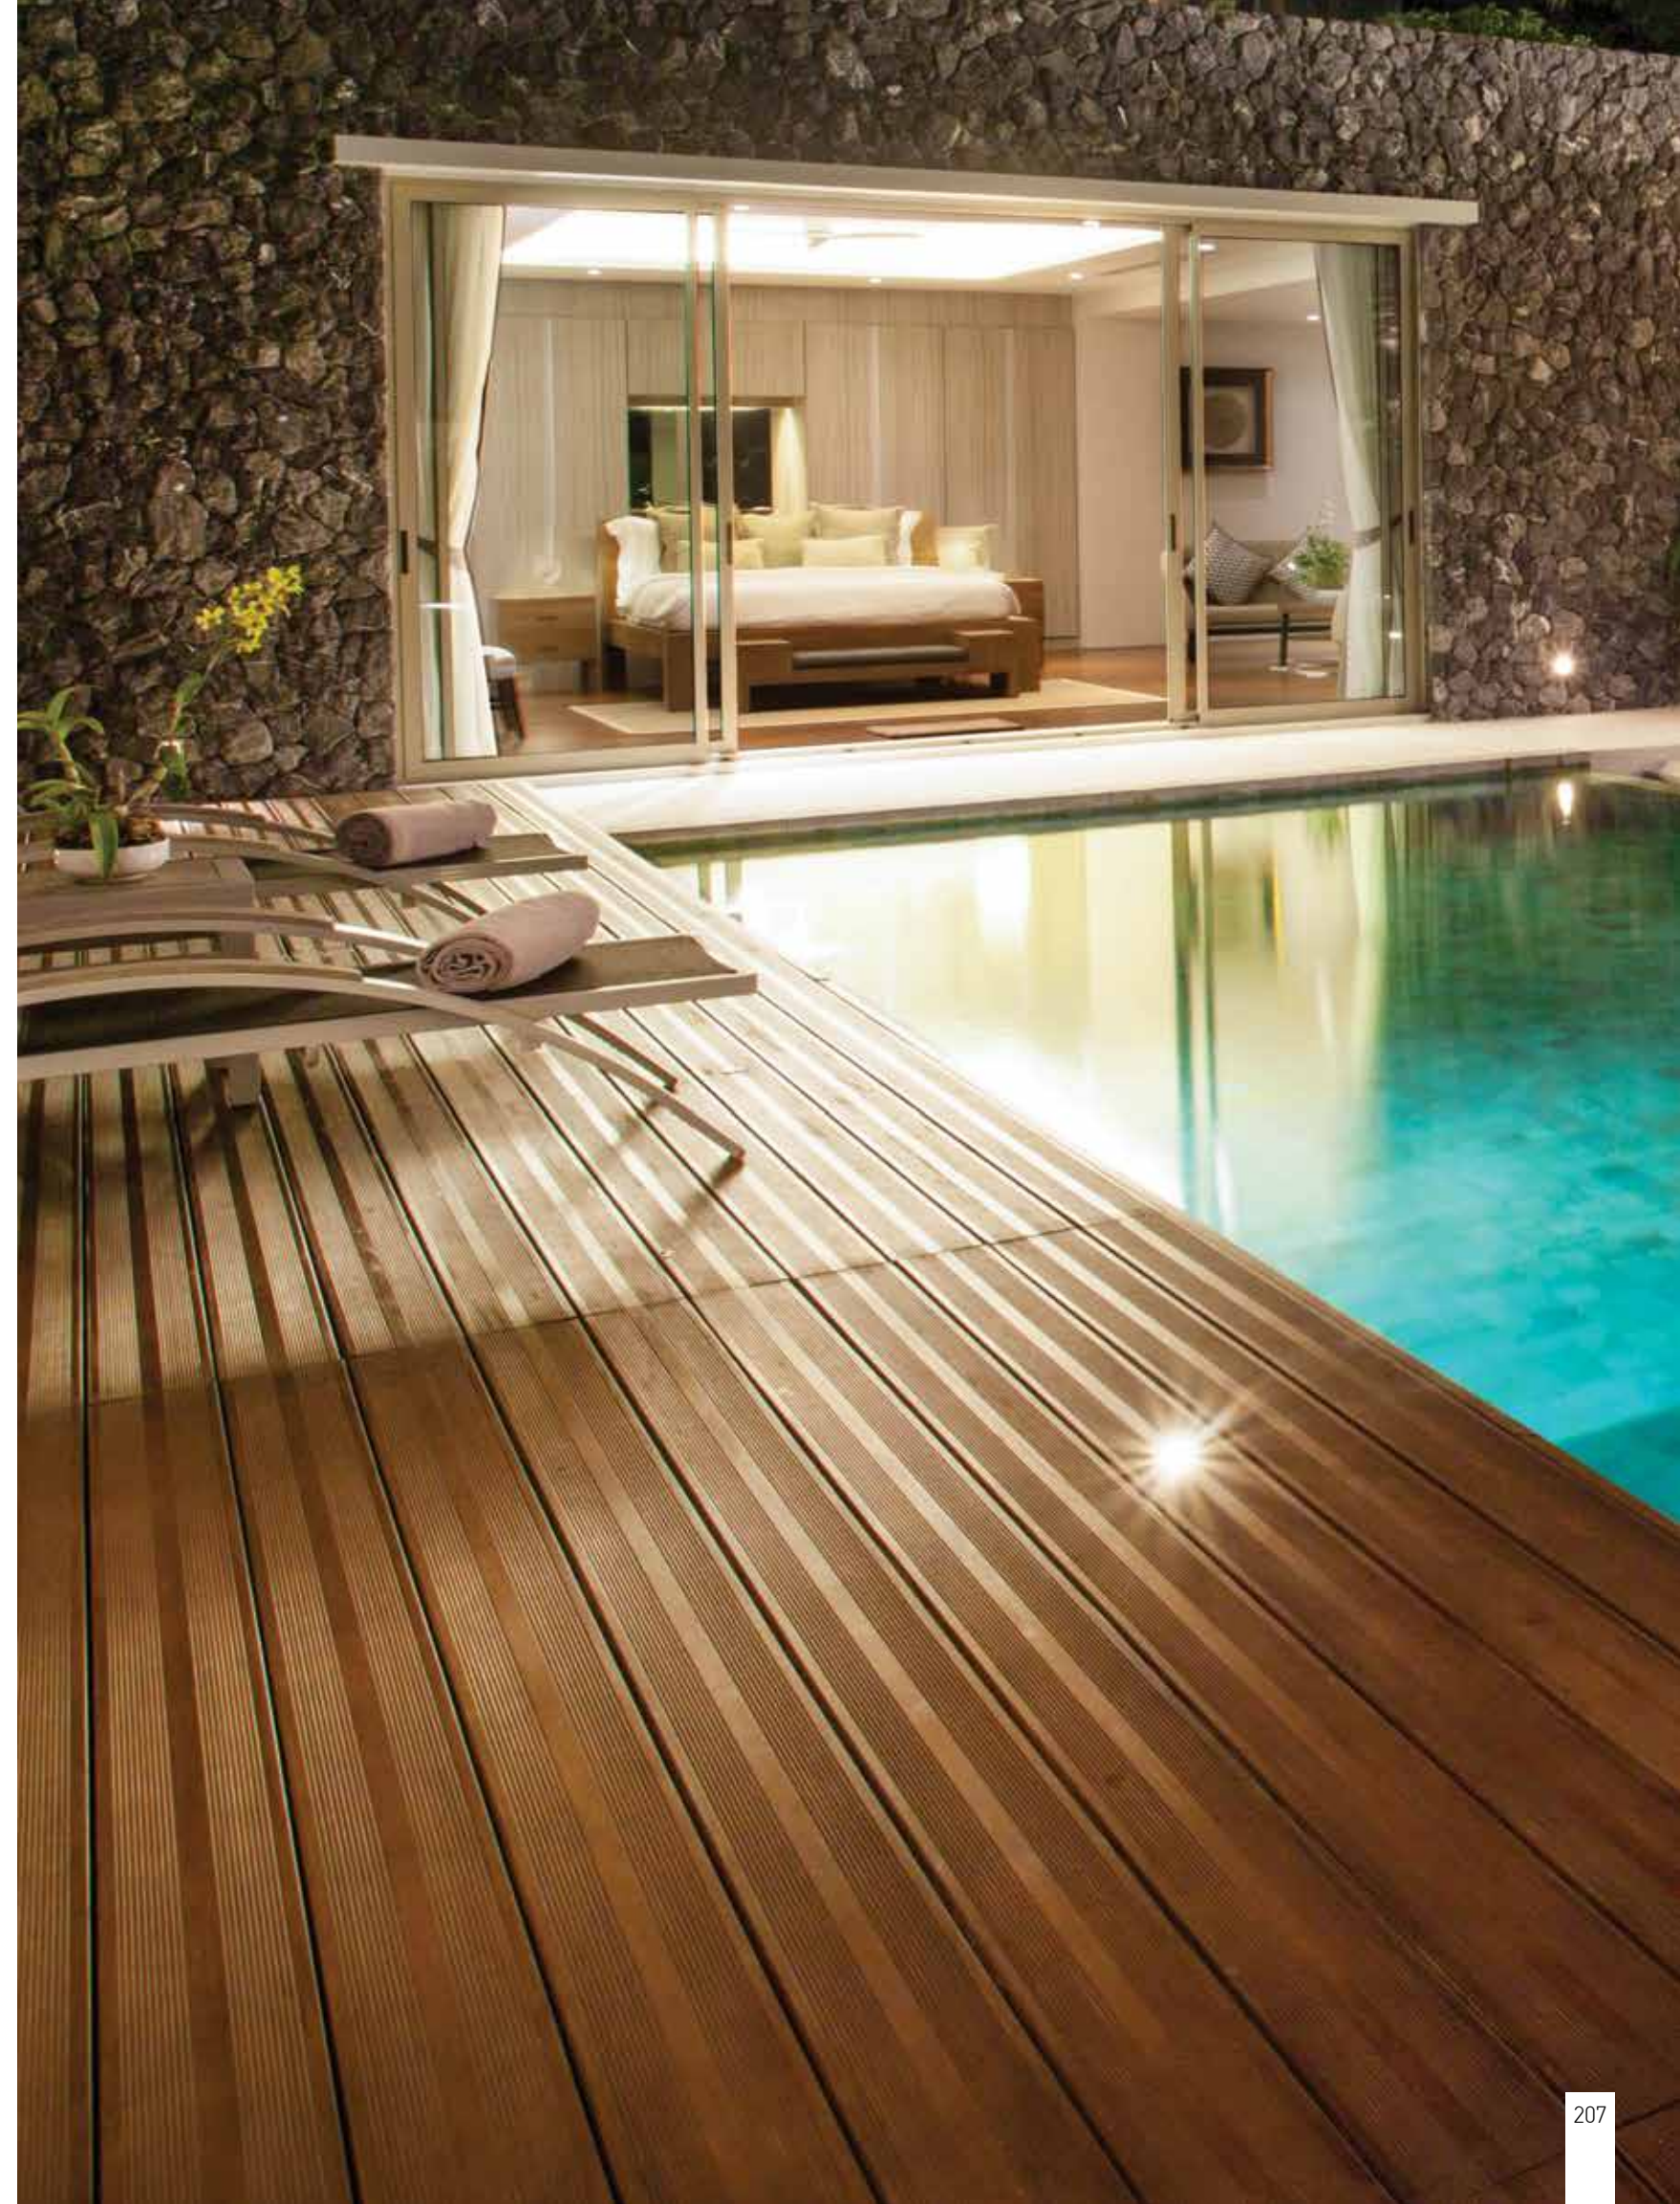


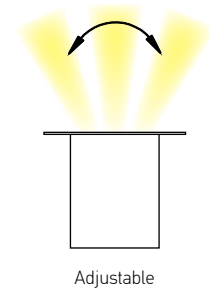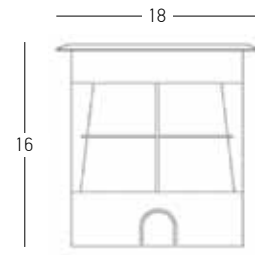

Adjustable

Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1200Lm
 Cri 80
 IP 67
 IK 8
 Dimensions Ø: 18cm H: 16cm
 Beam Angle 45°
 Material Stainless Steel - Tempered Glass
 Depth Required 17cm
 Recessed Mounting Box Included
 Special Feature Externally Adjustable Light on the frame
 50cm Cable Available
 Driver Included

Color Stainless Steel / Code E361




Adjustable


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 67
 IK 8
 Dimensions Ø: 13cm H: 14cm
 Beam Angle 45°
 Material Stainless Steel - Tempered Glass
 Depth Required 15cm
 Recessed Mounting Box Included
 Special Feature Internal Adjustable Light
 50cm Cable Available
 Driver Included

Color Stainless Steel / Code E360







Bulb 1x GU10 LED
 Power 10W MAX
 Input 220-240V, 50/60Hz
 IP 65
 IK 8
 Dimensions Ø: 10cm H: 10cm
 Material Stainless Steel - Tempered Glass
 Depth Required 11cm
 Recessed Mounting Box Included
 Special Feature 50cm Cable Available
 GU10 Lampholder Included
 Color Stainless Steel / **Code E359**






Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 618Lm
 Cri 80
 IP 67
 IK 8
 Dimensions Ø: 10cm H: 9.5cm
 Beam Angle 36°
 Material Stainless Steel - Tempered Glass
 Depth Required 12cm
 Recessed Mounting Box Included
 Special Feature Driver Included
 Color Stainless Steel / **Code E189**

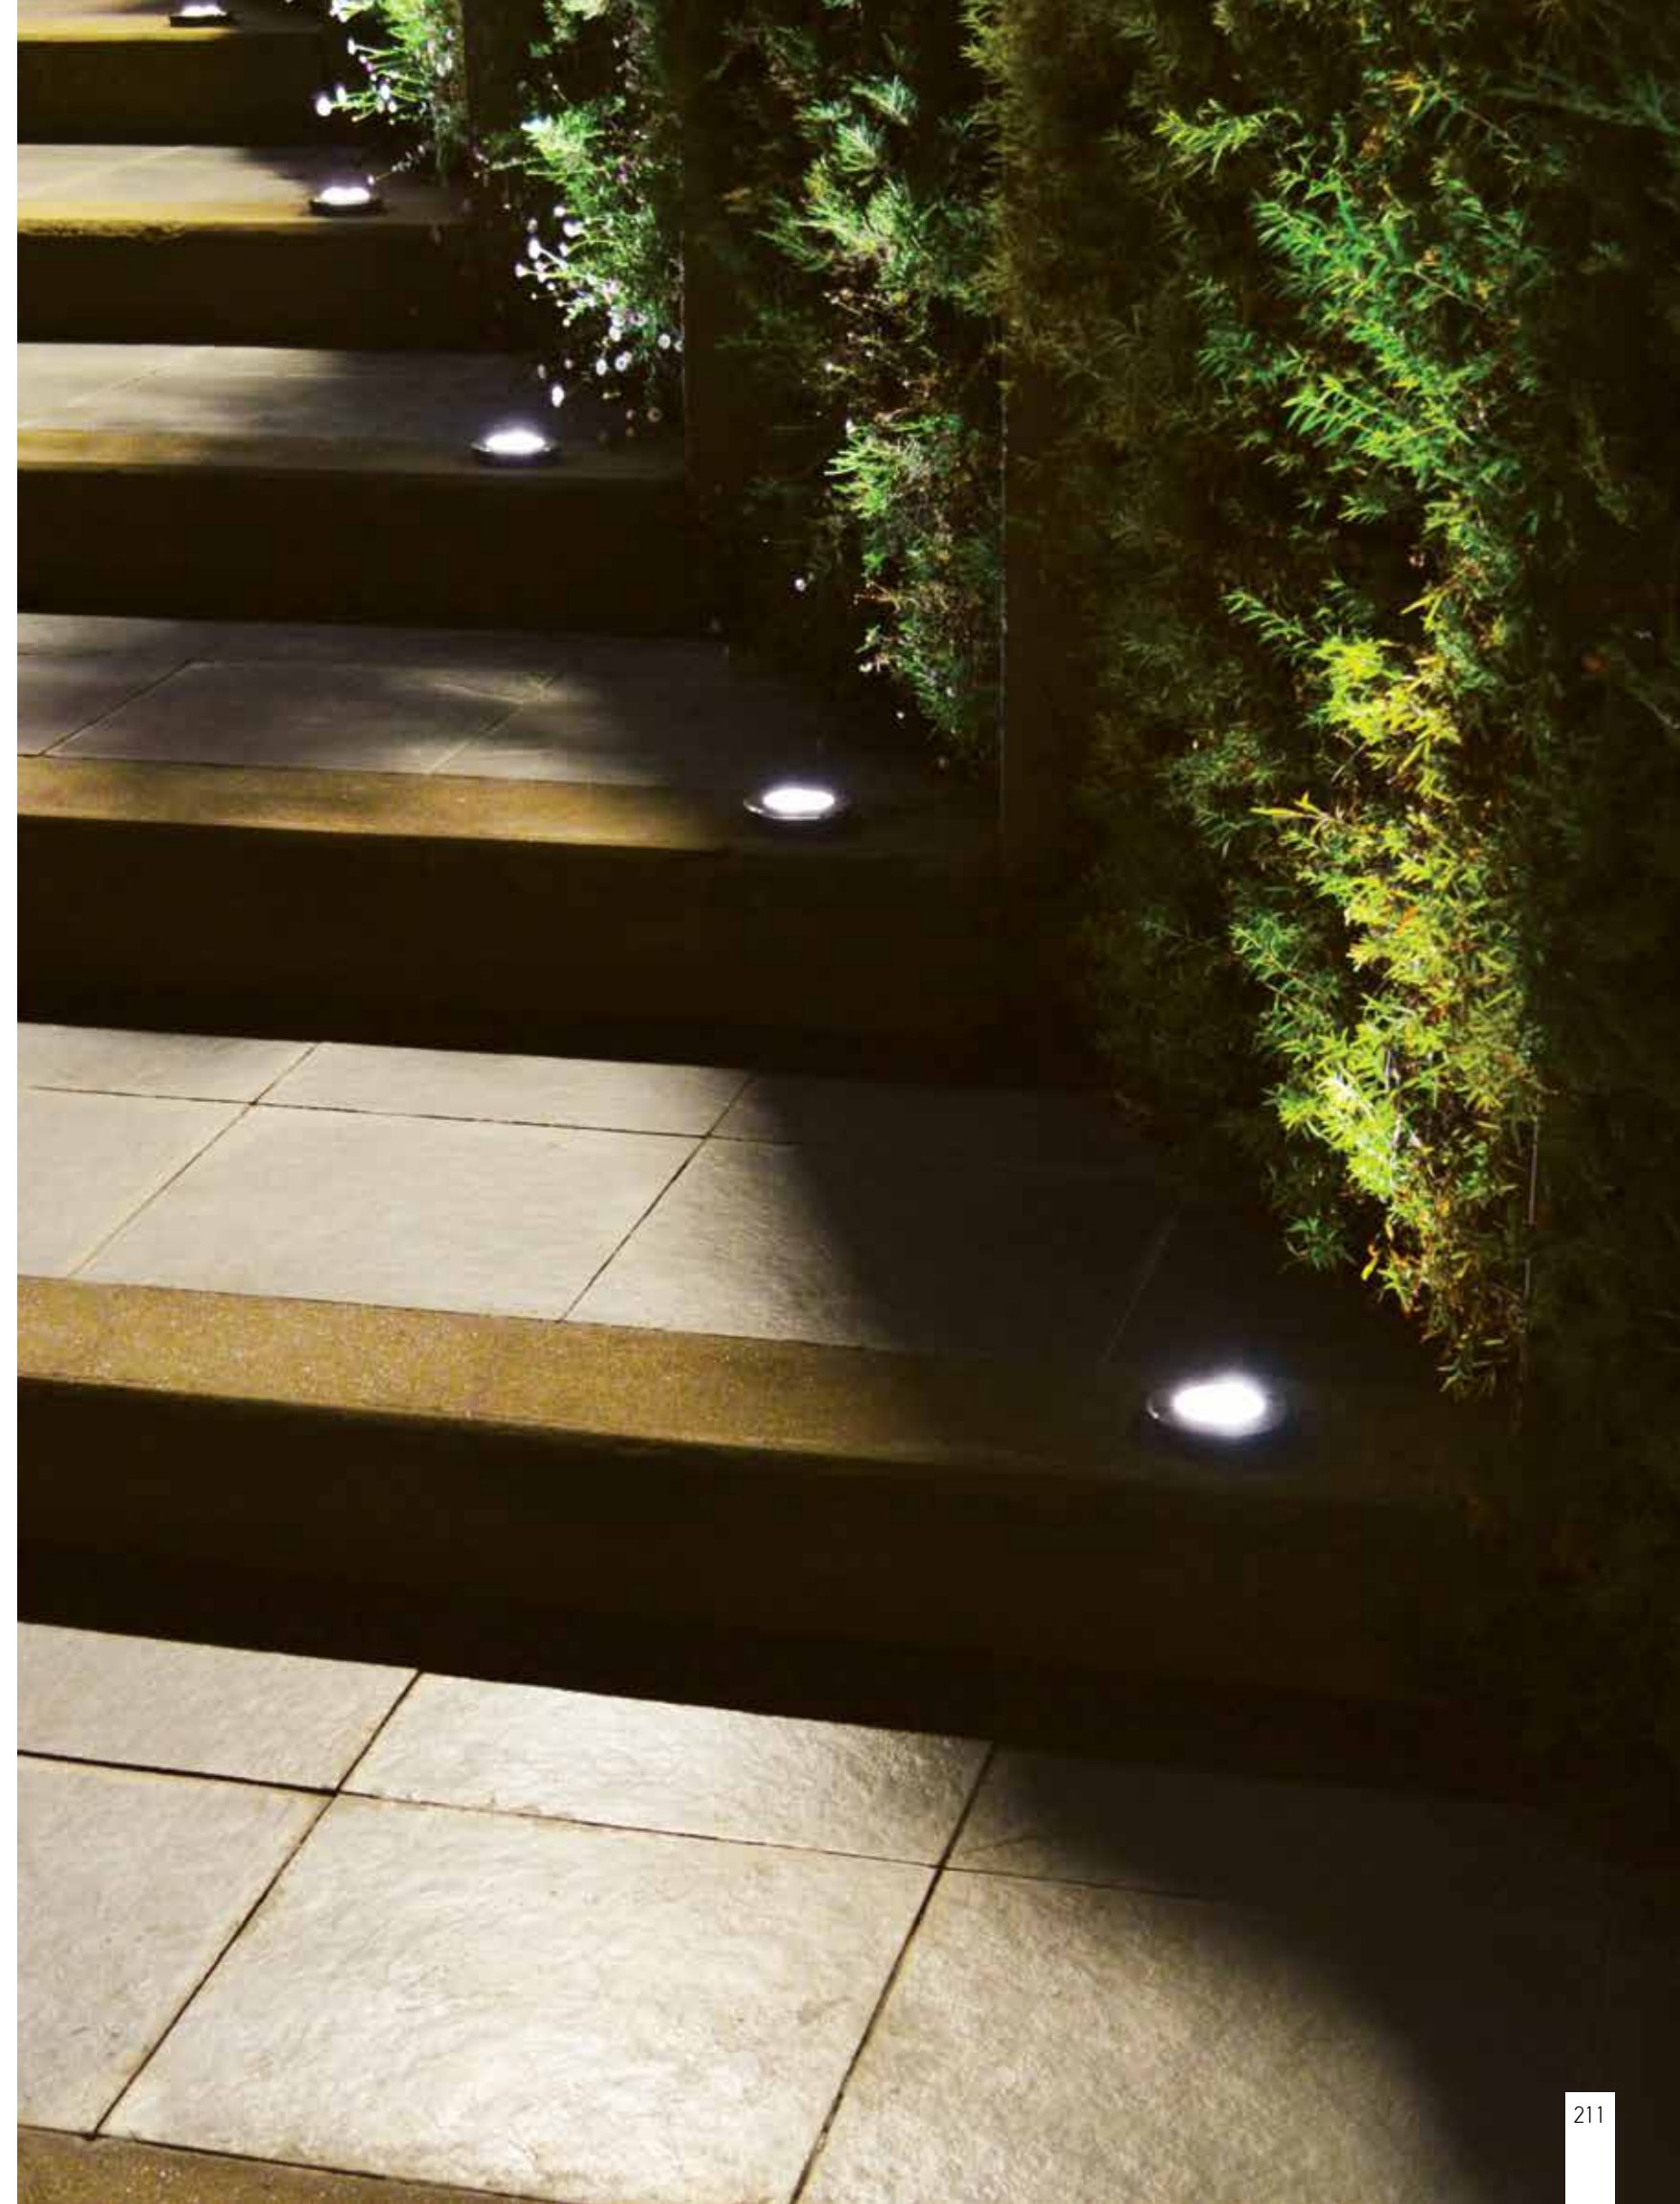

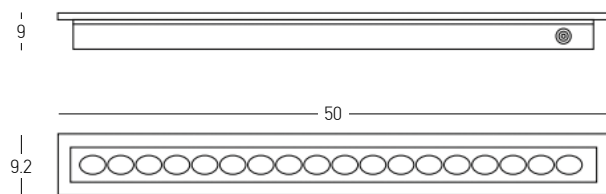


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 720Lm
 Cri 80
 IP 67
 IK 10
 Dimensions L: 50cm W: 9.2cm H: 9cm
 Beam Angle 45°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 11cm
 Recessed Mounting Box Included
 Special Feature 50cm Cable Available
 Driver Included

Color Stainless Steel / Code E366

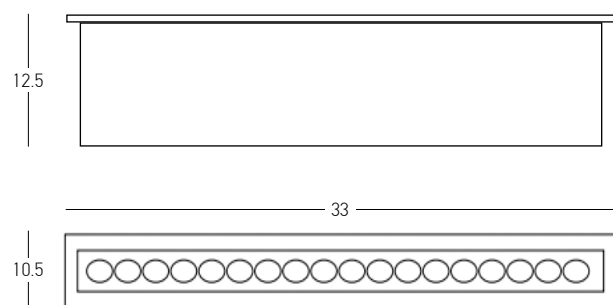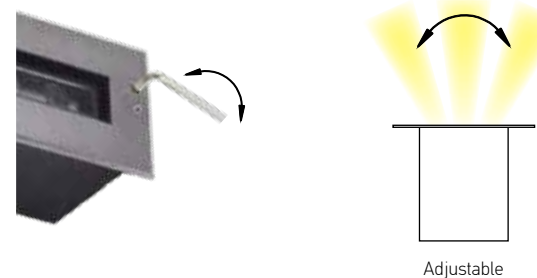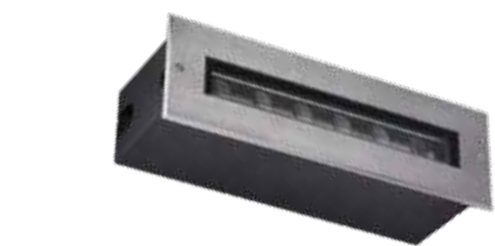

Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 720Lm
 Cri 80
 IP 67
 IK 10
 Dimensions L: 33cm W: 10.5cm H: 12.5cm
 Beam Angle 45°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 14.5cm
 Recessed Mounting Box Included
 Special Feature Externally Adjustable Light on the frame
 50cm Cable Available
 Driver Included

Color Stainless Steel / Code E365

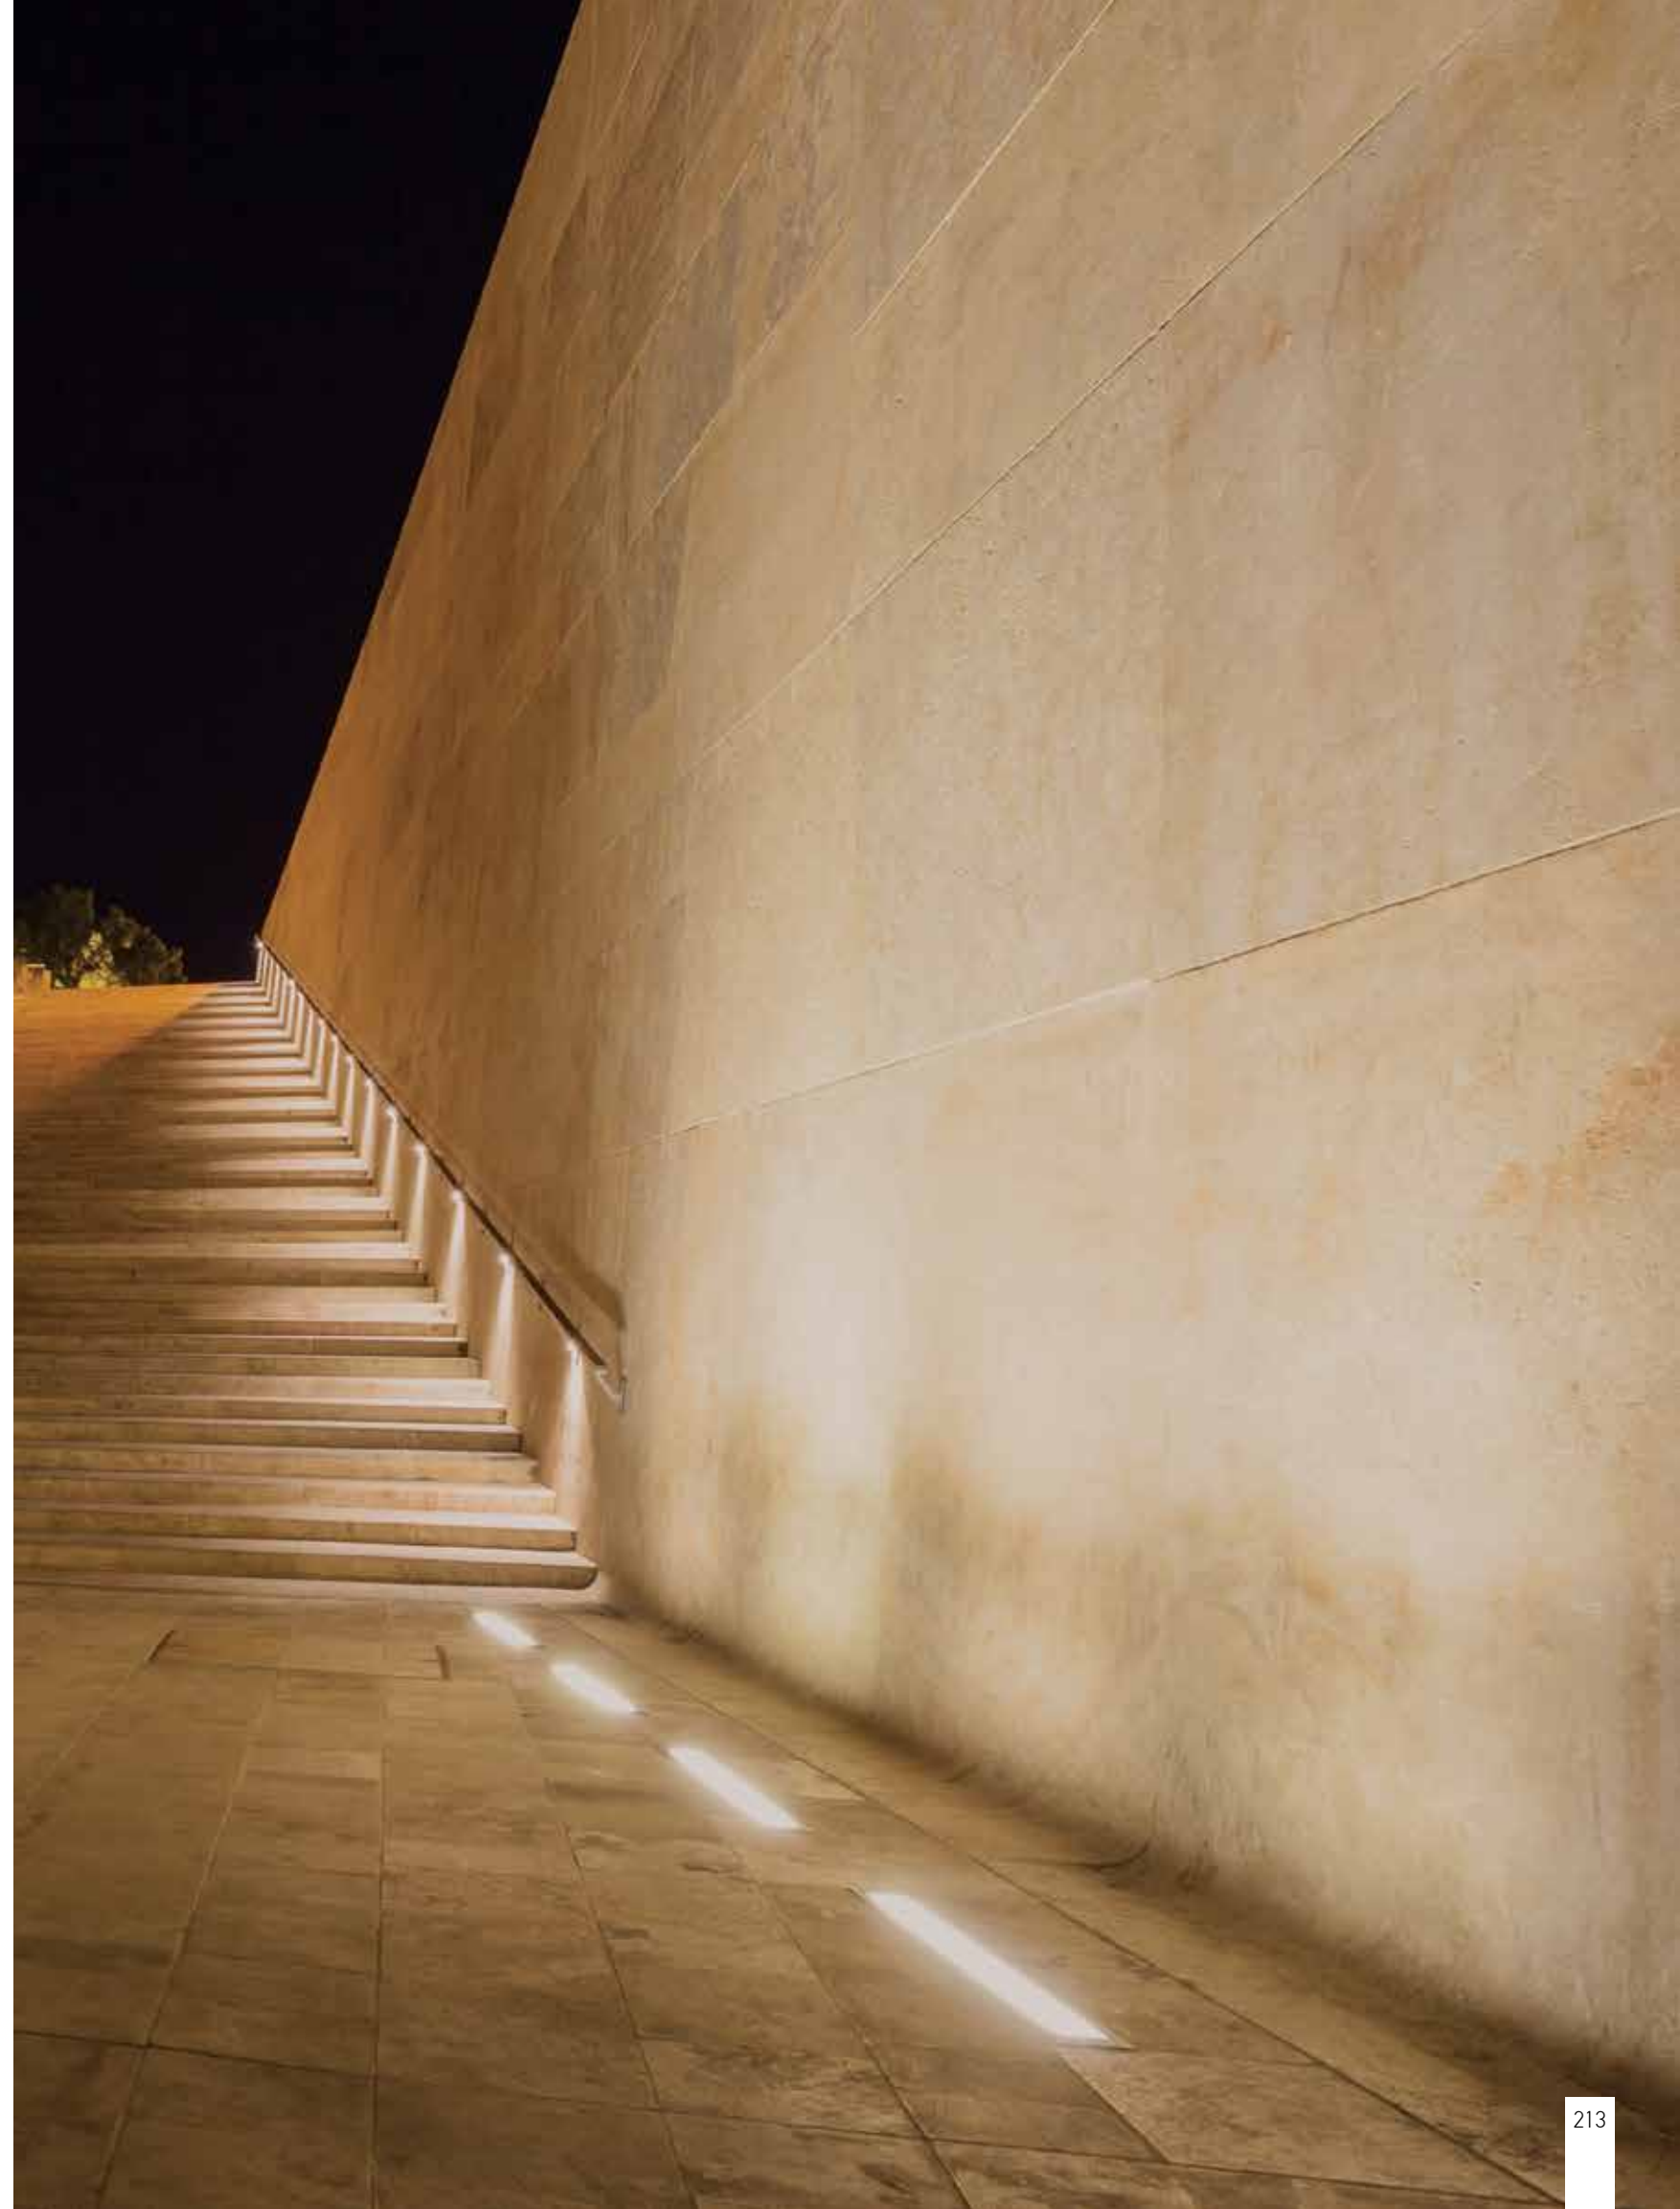

WALL WASHER | p.214-219



OUTDOOR LIGHTING | WALL WASHER

Wall Washers RGB - RGBW 12W



Code	IP	Kelvin	CRI	Watt	Lumen
E380	66	RGB	80	12W	MAX 280
E381	66	RGBW 4000	80	12W	MAX 480



Power 12x 1W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX
 Color Grey


Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

Wall Washer RGB - RGBW 24W



Code	IP	Kelvin	CRI	Watt	Lumen
E378	66	RGB	80	24W	MAX 560
E379	66	RGBW 4000	80	24W	MAX 960

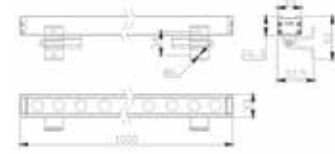

Power 24x 1W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX
 Color Grey


Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

Wall Washers Tunable White



Code	IP	Kelvin	CRI	Watt	Lumen
E382	66	2700 - 6500	80	24W	1580-1770

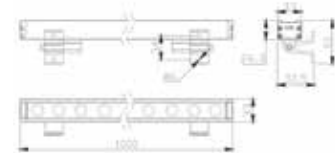

Power 24x 1W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX
 Color Grey

Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)


OTi DALI DIM 1-4CH

Input 24V
 Output Up to 240W
 Dimensions W: 4.2cm H: 2cm L: 18cm
 DALI Dimming
 Material Plastic
 Special Feature IP 20
 Color White / Code 4062172166010



Connectors Male & Female


Cable 25cm
 Input 24V
 IP 66
 Color Black / Code CNCTR 2

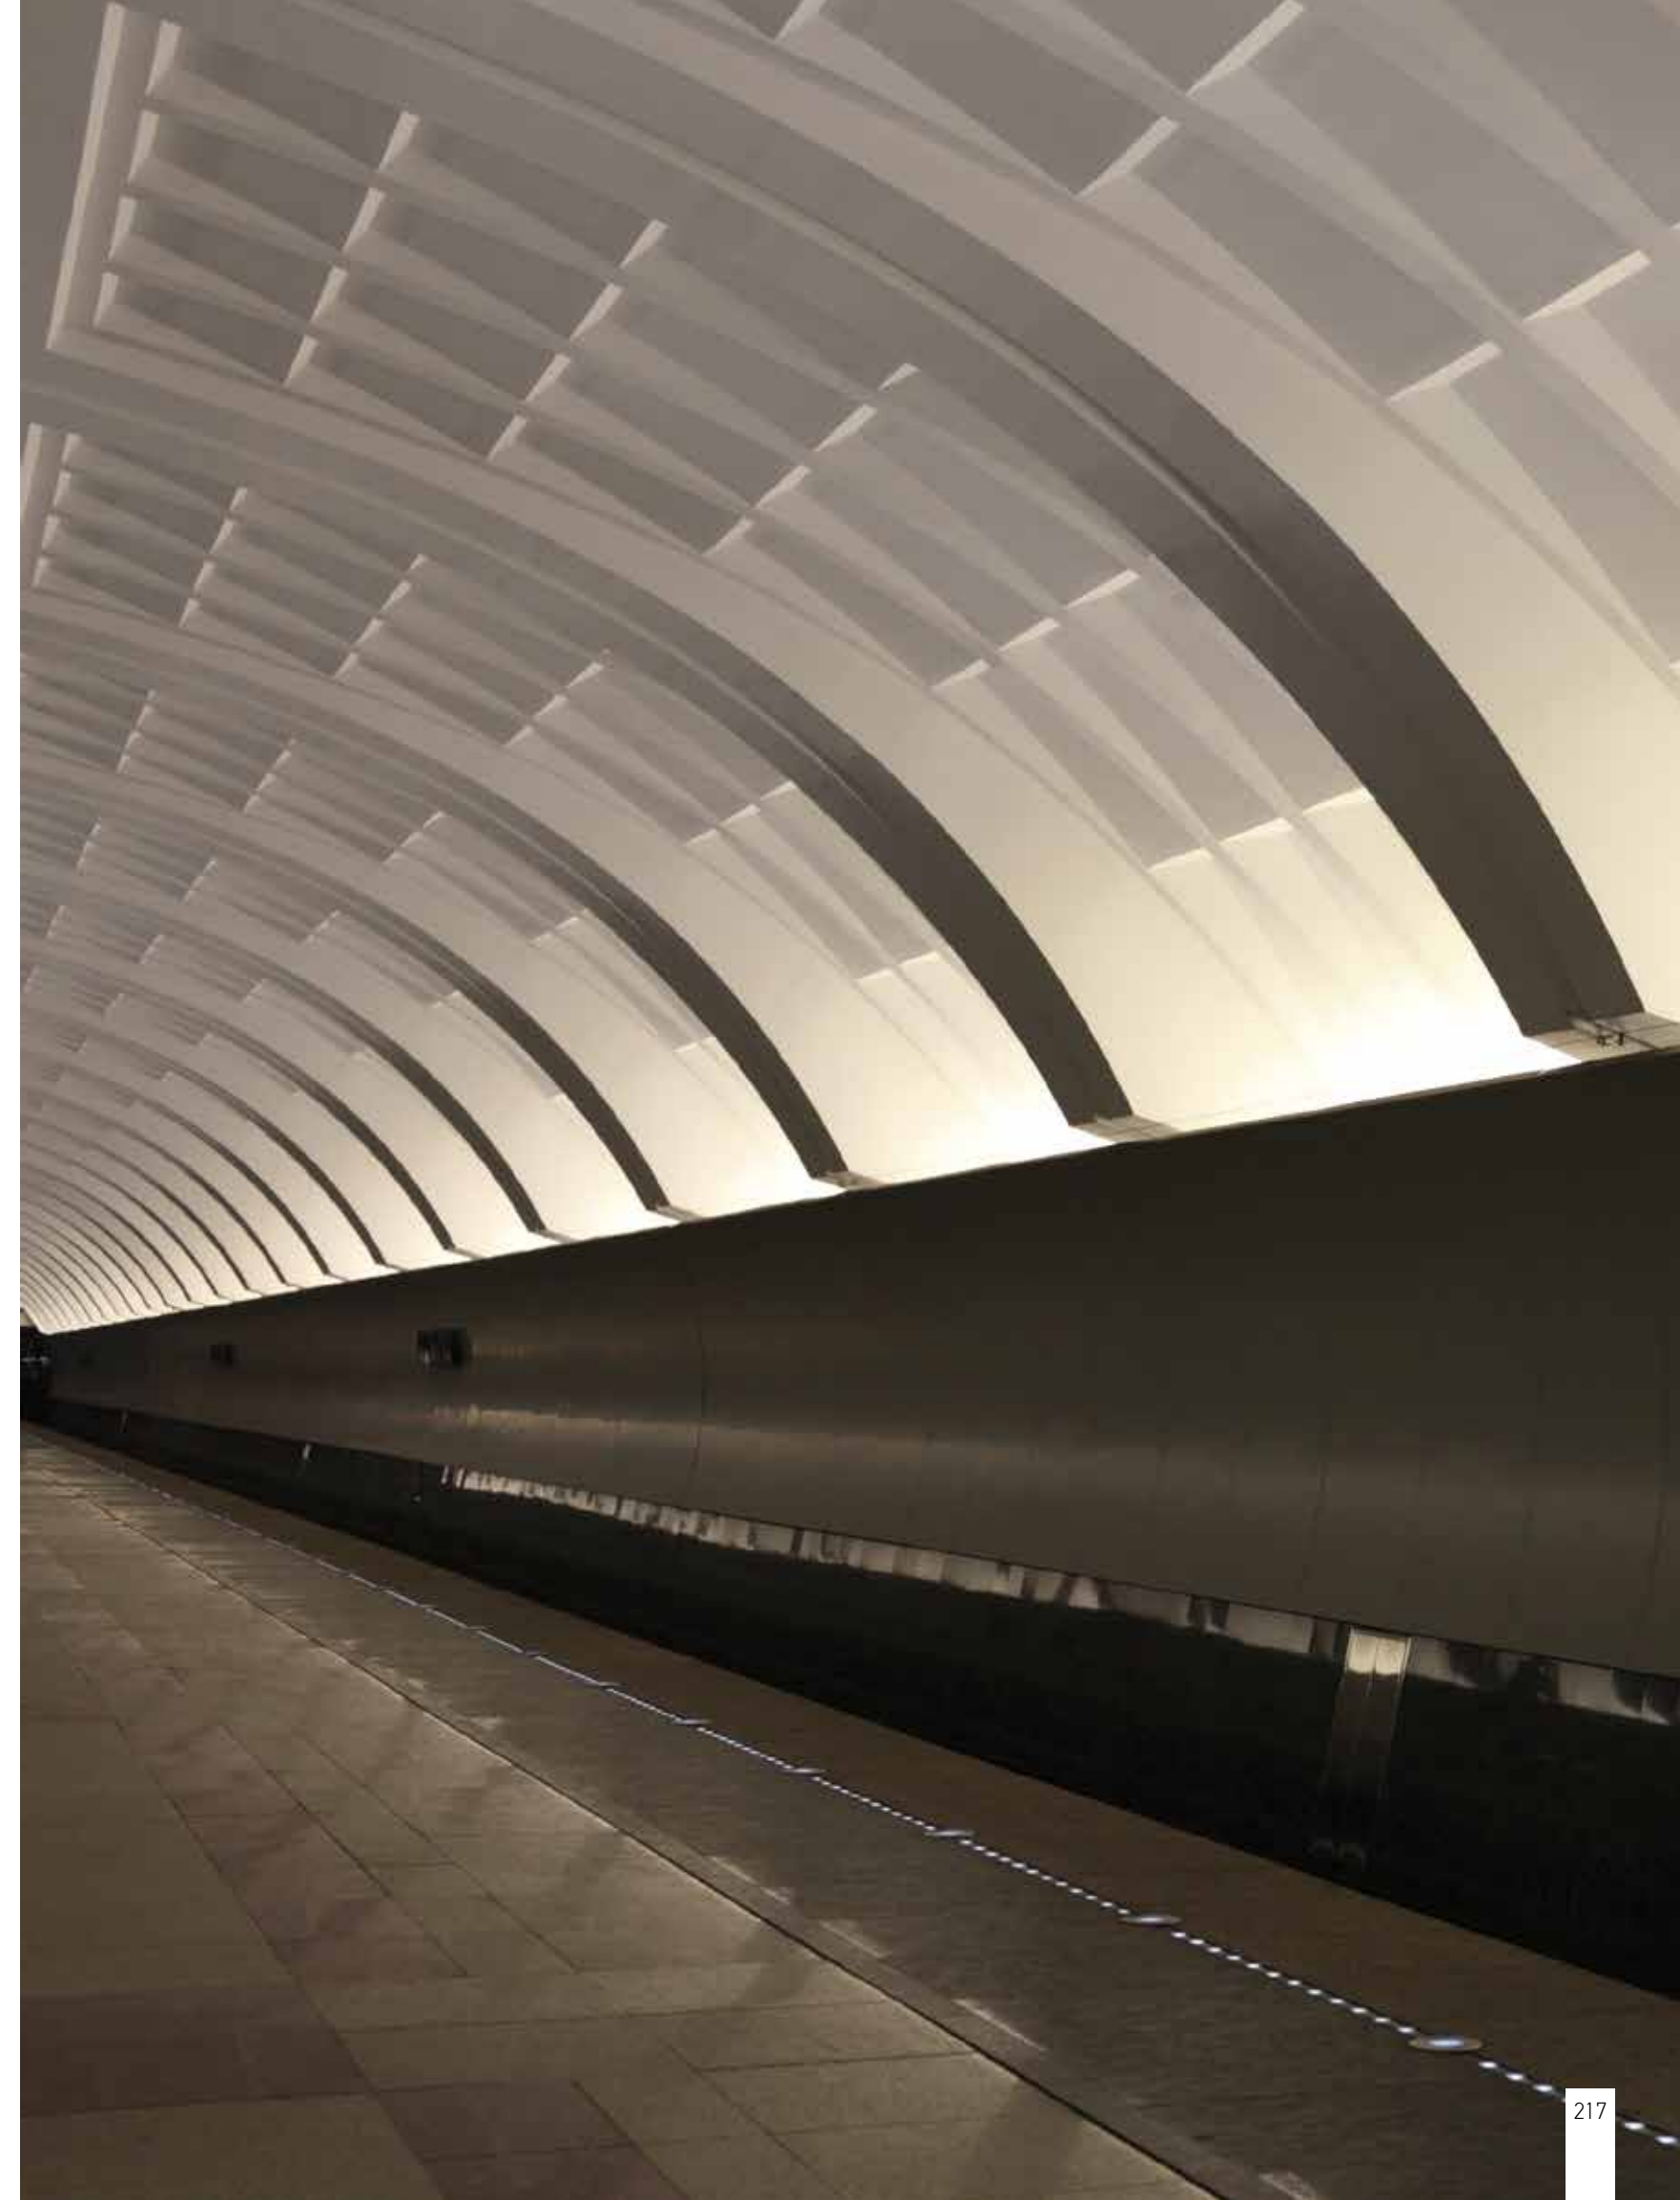

Wall Washers 12W



Code	IP	Kelvin	CRI	Watt	Lumen
E376	66	3000	80	12W	MAX 850
E377	66	4000	80	12W	MAX 870

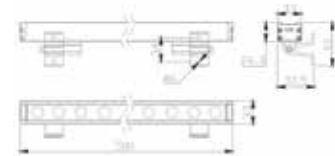

Power Input 12x1W
 Cri 24V
 IP 80
 Dimensions 66
 Beam Angle L: 50cm W: 3.3cm H: 2.6cm
 Material 60° x 10°
 Special Feature Aluminium
 Honeycomb Included
 Driver Not Included
 Connect 12pcs MAX

Color Grey


Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU
2. 1-10 Dimming : 1-10V Driver 24V
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1
4. ON-OFF Dimming : ON-OFF Driver 24V

Wall Washers 24W



Code	IP	Kelvin	CRI	Watt	Lumen
E374	66	3000	80	24W	MAX 1700
E375	66	4000	80	24W	MAX 1720

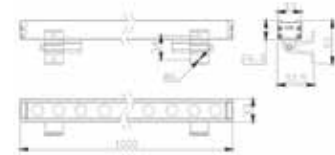

Power Input 24x1W
 Cri 24V
 IP 80
 Dimensions 66
 Beam Angle L: 100cm W: 3.3cm H: 2.6cm
 Material 60° x 10°
 Special Feature Aluminium
 Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX

Color Grey


Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU
2. 1-10 Dimming : 1-10V Driver 24V
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1
4. ON-OFF Dimming : ON-OFF Driver 24V



Connectors Male & Female

Cable 25cm
 Input 24V
 IP 66
 Color Black / Code CNCTR 1

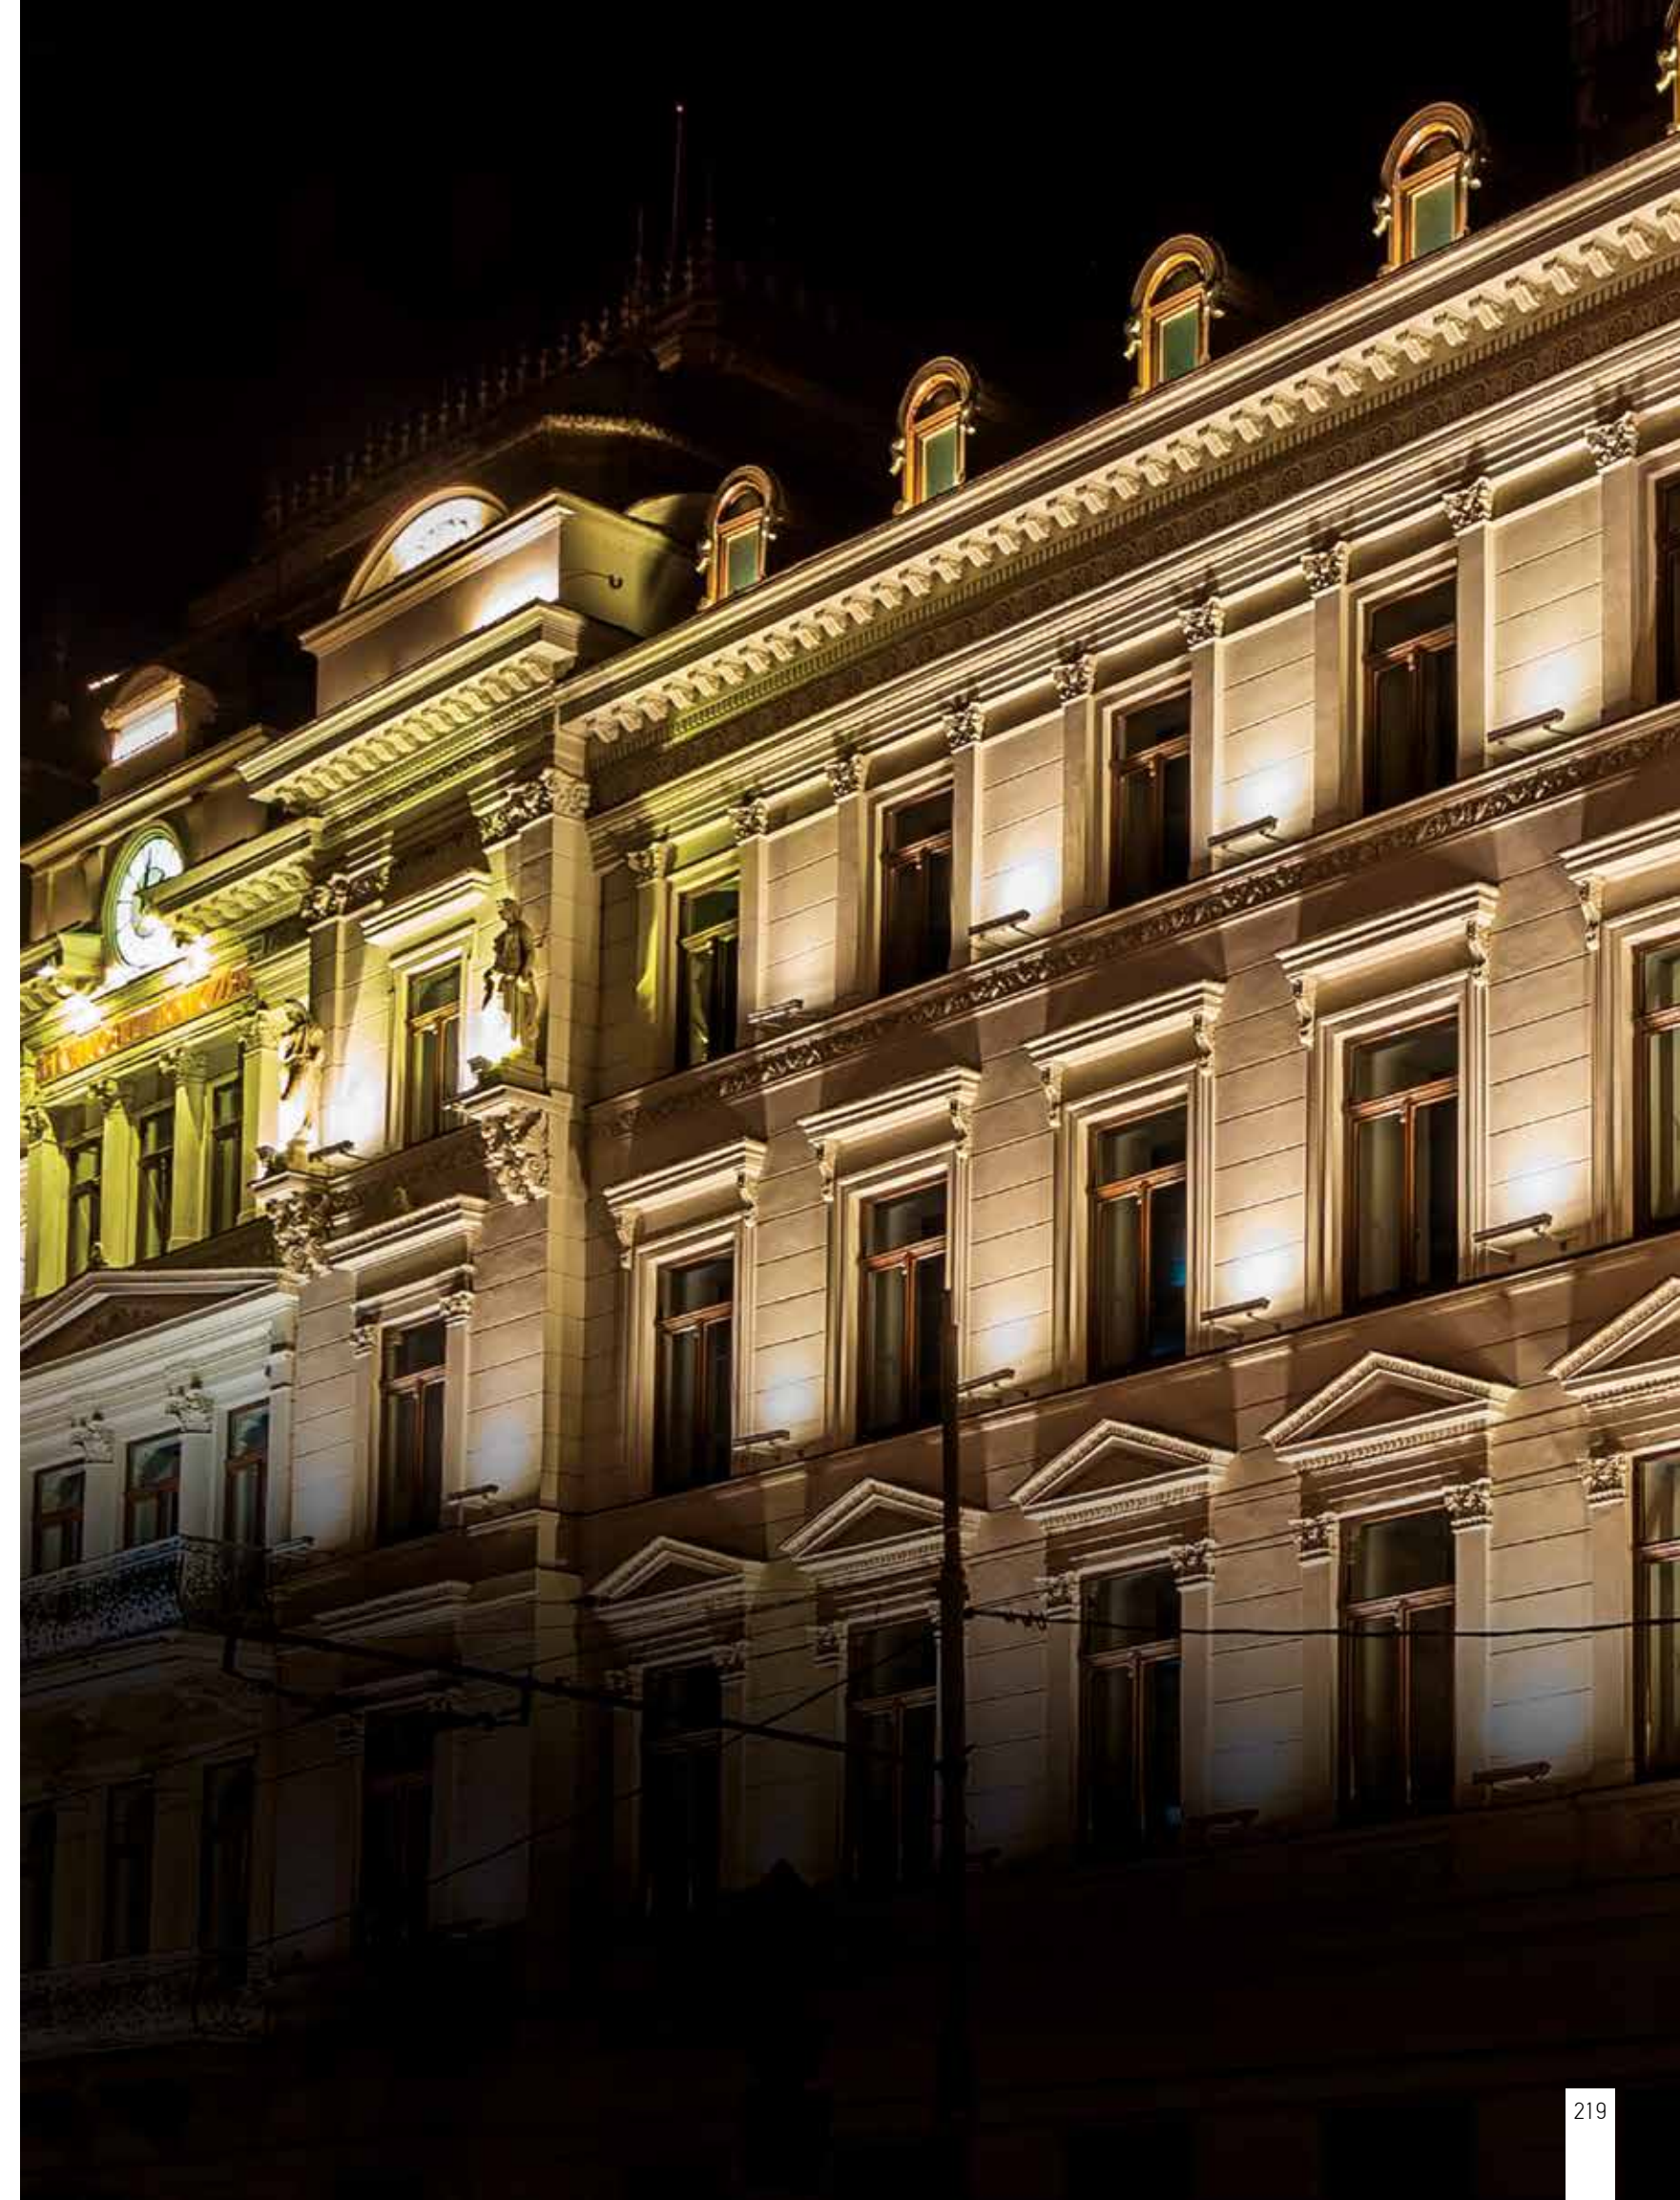

OUTDOOR LIGHTING | 24V DRIVERS

Power 30W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4.1cm H: 2.7cm L: 14.5cm
 Non Dimmable ☒ On-Off
 ELEMENT 30/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899605503



Power 60W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4.1cm H: 3.1cm L: 20.1cm
 Non Dimmable ☒ On-Off
 ELEMENT 60/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899605527



Power 120W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4.1cm H: 3.1cm L: 26cm
 Non Dimmable ☒ On-Off
 ELEMENT 120/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899605541



Power 180W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4cm H: 3.1cm L: 30cm
 Non Dimmable ☒ On-Off
 ELEMENT 180/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899605565



Power 250W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 3.5cm H: 5cm L: 37.5cm
 Non Dimmable ☒ On-Off
 ELEMENT 250/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / Code 4062172333467



Power 30W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 6.7cm H: 3cm L: 10.3cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / Code 4062172329767



Power 50W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / Code 4062172274340



Power 80W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / Code 4062172274364



Power 160W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 5cm H: 3.5cm L: 30cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / Code 4062172274388



Power 182W
 Input 220-240V, 50/60Hz
 Dimensions W: 4.2cm H: 2cm L: 17.2cm
 DMX Dimming ○
 OT DMX RGBW DIM 0-100%
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899557949



Power 240W
 Input 220-240V, 50/60Hz
 Dimensions W: 4.2cm H: 2cm L: 17.2cm
 Bluetooth Dimming ○
 OT BLE DIM 0-100%
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899557833



POWER by CASAMBI APP

Input 220-240V, 50/60Hz
 Dimensions W: 5cm H: 8cm L: 8cm
 DALI Dimming ○
 DALI MCU Tunable White Switch
 Material Plastic
 Special Feature IP 20
 Color White / Code 4052899465916



Power 100W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 5cm H: 3cm L: 23cm
 Dimmable Triac, 1-10 ○
 Material Metal
 Special Feature IP 20
 Color Metal / Code Z89100VND



Power 200W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 5cm H: 3cm L: 28.7cm
 Dimmable Triac, 1-10 ○
 Material Metal
 Special Feature IP 20
 Color Metal / Code Z89200VND



CNCTR 1	218	E208	66	E283	152	E341	116	4052899465916	221
CNCTR 2	216	E211	70	E284	142	E342	118	4052899557833	221
D-20-24	132	E216	112	E285	140	E343	114	4052899557949	221
V350-1050	138	E217	162	E286	140	E344	28	4052899605503	220
Z0800-BA	132	E219	194	E287	82	E345	28	4052899605527	220
Z69058-A	204	E220	194	E288	170	E346	174	4052899605541	220
Z69058-B	204	E227	99	E289	16	E347	174	4052899605565	220
Z89100VND	221	E229	180	E290	16	E348	62	4062172166010	216
Z89200VND	221	E230	181	E291	16	E349	136	4062172274340	221
E109	101	E235	74	E292	148	E350	136	4062172274364	221
E114	95	E235-12D	74	E293	149	E351	26	4062172274388	221
E121	104	E236	74	E294	179	E352	26	4062172329767	220
E122	104	E237	40	E295	56	E353	22	4062172333467	220
E123	104	E238	86	E296	122	E354	30		
E124	104	E239	86	E297	24	E355	36		
E127	102	E240	86	E298	52	E356	32		
E128	102	E241-G	178	E299	156	E357	34		
E132	58	E241-W	178	E300	170	E358	34		
E133	58	E242-G	178	E301	170	E359	210		
E135	100	E242-W	178	E302	54	E360	208		
E146	98	E243	92	E304	110	E361	208		
E149	102	E245	92	E305	110	E362	202		
E150	106	E246-G	176	E306	106	E363	202		
E151	106	E246-W	176	E307	106	E364	204		
E152	145	E247-G	176	E308	194	E365	212		
E153	144	E247-W	176	E309	194	E366	212		
E156	100	E248	185	E310	162	E367	36		
E159	101	E249	40	E311	160	E368	22		
E168	112	E250	76	E312	160	E369	10		
E177-A	146	E250-12D	76	E313	12	E370	10		
E177-B	146	E251	76	E314	12	E371	10		
E178	206	E253	46	E315	80	E372	132		
E179	206	E254	46	E316	81	E373	132		
E180	206	E256	70	E317	81	E374	218		
E181	182	E257	70	E318	94	E375	218		
E182	182	E261	98	E319	166	E376	218		
E183	182	E262	98	E320	166	E377	218		
E184	182	E263	120	E321	166	E378	216		
E185	108	E265	126	E322	168	E379	216		
E186	108	E266	126	E323	172	E380	216		
E187	184	E267	128	E324	172	E381	216		
E189	210	E268	124	E325	38	E382	216		
E190	44	E269	196	E326	198	E383	42		
E191	44	E270	196	E327	198	E384	42		
E192	44	E271	124	E328	134	E398	14		
E193	18	E272	89	E329	134	E399	14		
E194	18	E273	84	E330	134	E400	14		
E195	96	E274	88	E331	134	E401	15		
E197	90	E275	116	E332	188	E402	15		
E199	91	E276	60	E333	188	E403	138		
E201	122	E277	60	E334	48	E404	138		
E202	122	E278	85	E335	48	S112	192		
E203	50	E279	154	E336	48	S113	192		
E204	50	E280	158	E337	72	S131	190		
E205	68	E281	150	E338	64	S132	190		
E206	68	E282	150	E339	64	S133	190		
E207	66	E282-SP	150	E340	192	S134	190		



ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri

Postal: 19001 , P.O. box: 4791

Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521

info@zambelislights.gr | zambelislights.gr

